

INTERNATIONAL STANDARD



**Information technology – Home network resource management –
Part 2: Architecture**

IECNORM.COM : Click to view the full PDF of ISO/IEC 30100-2:2016



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2016 ISO/IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about ISO/IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - www.iec.ch/searchpub

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing 20 000 terms and definitions in English and French, with equivalent terms in 15 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

65 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

IECNORM.COM : Click to view the full text of IEC 60100-2:2016

INTERNATIONAL STANDARD



**Information technology – Home network resource management –
Part 2: Architecture**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 35.200

ISBN 978-2-8322-3293-4

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	4
INTRODUCTION.....	5
1 Scope.....	6
2 Normative references.....	6
3 Terms, definitions and abbreviations	7
3.1 Terms and definitions	7
3.2 Abbreviations	9
3.3 Conventions.....	10
4 Conformance.....	10
5 Home network resource management	10
5.1 Information resource categories.....	10
5.2 Architecture	11
5.3 Resource information provider.....	13
5.4 Home resource management process	14
5.5 Management application.....	14
5.6 Interface	15
6 Home resource model.....	16
6.1 Home resource model	16
6.2 Home resource object	16
6.2.1 Domain, class and resource object	16
6.2.2 Resource object structure.....	19
6.3 Domain-specific information	19
6.3.1 General.....	19
6.3.2 Device specific information	20
6.3.3 Network specific information	20
6.3.4 Physical space specific information.....	20
6.3.5 Service specific information.....	20
6.4 Home resource relation object	21
6.4.1 Definition	21
6.4.2 BNF notation of resource relation object	22
6.5 Miscellaneous	23
6.5.1 Relationship generation methods.....	23
6.5.2 Common policy	23
6.5.3 Privacy.....	23
7 Home network resource information modeling	24
7.1 Overview.....	24
7.2 Device-specific information modelling	24
7.3 Network specific information	101
7.4 Physical space-specific information modelling.....	116
7.5 Service-Specific Information modelling	133
Annex A (informative) Implementation of IWML (example)	189
A.1 Overview.....	189
A.2 IWML	189
A.2.1 General.....	189
A.2.2 IWML: Device description schema	189

Annex B (informative) Security and privacy model (examples).....	192
B.1 Overview.....	192
B.2 Security and Privacy model	192
B.2.1 General.....	192
B.2.2 Access control: XACML	192
B.2.3 Encryption: XML encryption	193
B.2.4 Signature: XML signature	193
Annex C (informative) Implementation of home resource model (example)	194
C.1 Overview.....	194
C.2 Resource types of resource object.....	194
C.2.1 General.....	194
C.2.2 Resource type of device domain	194
C.2.3 Resource type of network domain	195
C.2.4 Resource type of service domain	195
C.2.5 Resource type of physical space domain	196
Bibliography	197
Figure 1 – Logical concept of home resource management architecture	11
Figure 2 – Overview of the home network resource management architecture	12
Figure 3 – Resource information provider collects data from one or more HES entities	13
Figure 4 – Resource management process model.....	14
Figure 5 – Management information	15
Figure 6 – Interfaces of resource management process	15
Figure 7 – Resource object hierarchy	18
Figure 8 – Resource object structure.....	19
Figure 9 – Home resource relation object	21
Table 1 – Notations in ISO/IEC and this standard	10
Table 2 – Definition of resource domain ID	19
Table 3 – Resource relation types	22
Table 4 – BNF notation of resource relation object.....	23

INFORMATION TECHNOLOGY – HOME NETWORK RESOURCE MANAGEMENT –

Part 2: Architecture

FOREWORD

- 1) ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.
- 2) The formal decisions or agreements of IEC and ISO on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees and ISO member bodies.
- 3) IEC, ISO and ISO/IEC publications have the form of recommendations for international use and are accepted by IEC National Committees and ISO member bodies in that sense. While all reasonable efforts are made to ensure that the technical content of IEC, ISO and ISO/IEC publications is accurate, IEC or ISO cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees and ISO member bodies undertake to apply IEC, ISO and ISO/IEC publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any ISO, IEC or ISO/IEC publication and the corresponding national or regional publication should be clearly indicated in the latter.
- 5) ISO and IEC do not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. ISO or IEC are not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or ISO or its directors, employees, servants or agents including individual experts and members of their technical committees and IEC National Committees or ISO member bodies for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication of, use of, or reliance upon, this ISO/IEC publication or any other IEC, ISO or ISO/IEC publications.
- 8) Attention is drawn to the normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this ISO/IEC publication may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

International Standard ISO/IEC 30100-2 was prepared by subcommittee 25: Interconnection of information technology equipment, of ISO/IEC joint technical committee 1: Information technology.

A list of all currently available parts of the ISO/IEC 30100 series, published under the general title *Information technology – Home network resource management*, can be found on the IEC website.

This International Standard has been approved by vote of the member bodies, and the voting results may be obtained from the address given on the second title page.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

The ISO/IEC 30100 series of standards specifies an abstract model for remote management of home networks conforming to the Home Electronic System (HES) architecture specified in ISO/IEC 14543-2-1. HES consists of a collection of devices that are able to interwork via a common internal network. In a home environment several HESs may operate concurrently, each with separate control and management methods. The Home resource management architecture allows uniform fault processing, diagnostics and configuration management of HES elements in a home environment.

The ISO/IEC 30100 series specifies the home network resource management architecture and an information model for various home network elements. The information model specifies the minimum requirements of the functionalities that shall be provided by each HES entity. It is specified by the XML-based schema provided in Clause 7. The information consists of the mandatory and optional attributes including user-defined attributes. The user-defined attributes are used for a proprietary purpose or to define attributes that are not specified in the information model. In this part, the information model is specified to cover the physical space, device, network and service information. This information model can be easily extended to accommodate new types of information including user-defined attributes. These functionalities are required to accommodate changes with minimal uploads and restructuring.

Currently, ISO/IEC 30100, *Information technology – Interconnection of information technology equipment – Home Network Resource Management*, consists of the following parts:

Part 1: Requirements

Part 2: Architecture

Part 3: Management application

ISO/IEC 30100 is applicable to:

- a management server located at a home network service provider that manages home networks;
- an apartment complex server, located in an office at the apartment complex;
- a home residential gateway or set top box (STB).

INFORMATION TECHNOLOGY – HOME NETWORK RESOURCE MANAGEMENT –

Part 2: Architecture

1 Scope

This part of ISO/IEC 30100 specifies the general information model and architecture for managing the resources in a home network. Home network resources are managed objects that provide home network services. Essential home resources include device, network and service resources.

The objectives of this standard are to

- define terminology that describes logical resources of devices, networks and services in a home area network;
- specify the logical information model for describing relations among resources;
- describe the basic logical functional procedures of home area networks (e.g., remote maintenance, auto-configuration and fault processing).

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 7498-1, *Information technology – Open Systems Interconnection – Basic Reference Model: The Basic Model*

ISO/IEC 14543-2-1, *Information technology – Home electronic system (HES) architecture – Part 2-1: Introduction and device modularity*

ISO/IEC 15944-8, *Information technology – Business Operational View – Part 8: Identification of privacy protection requirements as external constraints on business transactions*

ISO/IEC 18012 (all parts), *Information technology – Home electronic system (HES) – Guidelines for product interoperability*

ISO/IEC 18012-2:2012, *Information technology – Interconnection of information technology equipment – Home Electronic System (HES) – Guidelines for product interoperability – Part 2: Taxonomy and Lexicon*

ISO/IEC 27000, *Information technology – Security techniques – Information security management systems – Overview and vocabulary*

ISO/IEC 27001, *Information technology – Security techniques – Information security management systems – Requirements*

ISO/IEC 27002, *Information technology – Security techniques – Code of practice for information security management*

ISO/IEC 27003, *Information technology – Security techniques – Information security management system implementation guidance*

ISO/IEC 27004, *Information technology – Information security management – Measurement*

ISO/IEC 27005, *Information technology – Security techniques – Information security risk management*

ISO/IEC 27006, *Information technology – Security techniques – Requirements for bodies providing audit and certification of information security management systems*

ISO/IEC 27007, *Information technology – Security techniques – Guidelines for information security management systems auditing*

ISO/IEC TR 27008, *Information technology – Security techniques – Guidelines for auditors on information security controls*

ISO/IEC 27009, *Information technology – Security techniques – Sector-specific application of ISO/IEC 27001 – Requirements*¹

ISO/IEC 27010, *Information technology – Security techniques – Information security management system implementation guidance*

ISO/IEC 27011, *Information technology – Security techniques – Information security management guidelines for telecommunications organizations based on ISO/IEC 27002*

ISO/IEC 30100-1:2016, *Information technology – Home network resource management – Part 1: Requirements*

3 Terms, definitions and abbreviations

3.1 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1.1

apartment complex

group of two or more apartment buildings with a common manager

Note 1 to entry: A common manager provides management services for the apartment buildings. These services may include the management of home networks in the apartments.

3.1.2

application

field of use of the home resource management process

3.1.3

class

set of instances of home resources

¹ To be published.

**3.1.4
device**

distinct physical unit on a network that performs a (set of) specific function(s) in a particular context

Note 1 to entry: A device can either be an end node on the network, or an intermediate node (as in the case of a network gateway device connecting two distinct physical networks).

**3.1.5
domain**

range of validity of a resource object

**3.1.6
HES entity**

logical component that has a defined functionality in the HES architecture

**3.1.7
HES interoperability framework**

collection of standards defining device and network interoperability for homes

**3.1.8
home resource**

managed object that can be used for home network services

**3.1.9
home resource management interface**

data transfer between a management application and a home resource management process

**3.1.10
home resource model**

abstract, formal representation of resource objects in a home environment

Note 1 to entry: Resource objects include resource properties, relationships and the operations that can be performed on them.

**3.1.11
management application**

function to be used by an apartment complex manager for supporting the occupants

**3.1.12
management information**

set of components used either in a management application or in a resource management process

**3.1.13
network**

devices interconnected via a common medium for communicating according the reference model specified in ISO/IEC 7498-1

**3.1.14
object**

**3.1.14.1
object**

unit of software functionality

Note 1 to entry: This definition is traditionally used in object-oriented programming. It has properties and methods for accessing these properties and/or interacting with other objects.

3.1.14.2

object

collection of related data (attributes) and methods (procedures) for operating on that data

Note 1 to entry: This definition implies a well-defined boundary (interface) and identity that encapsulates state and behaviour

3.1.15

physical space

arbitrary set of reference co-ordinates of a home resource in the real world

3.1.16

resource information provider

functions for home resource management process to control HES entities

Note 1 to entry: Collects data from HES entities and transfers the collected data to the home resource management process.

3.1.17

resource object

unit managed by the resource management process

Note 1 to entry: It has methods for accessing internal properties of the object and/or interacting with other objects. A resource object can contain one or more HES entities.

3.1.18

resource relation object

association between resource objects

3.1.19

service

field of use of an HES

3.2 Abbreviations

AFM	Automatic Fault Management
BNF	Backus-Naur Form
DM	Device Management
HAN	Home Area Network
HES	Home Electronic System
HNRM	Home Network Resource Management
HRMI	Home Resource Management Interface
HRPI	Home Resource Provider Interface
IFC	Industry Foundation Classes
IWF	Inter Working Function
IWML	Inter Working Markup Language
LSM	Layer System Management
NM	Network Management
OSI	Open System Interconnection
PLC	Power Line Carrier
QoS	Quality of Service
RM	Remote Management
STB	Set Top Box
SVC	Service object

XSD XML Schema Definitions

3.3 Conventions

Table 1 shows the SI-unit equivalents of the non-SI notations used in the attributes, diagrams and XML Schema Definitions (XSD) in Clause 7. These non-SI notations avoid syntax conflicts with the XSD tag delimiter (“/”).

Table 1 – Notations in ISO/IEC and this standard

Notations in this standard	SI units
bps	bit/s
kbits	kbit/s
mbps	Mbit/s
gbps	Gbit/s
sec	s
usec	µs

4 Conformance

In order to claim conformance to this standard a service provider offering management services for home networks shall provide the following services for each home network device as specified in ISO/IEC 14543-2-1:

- a resource management process that manages each home resource object as specified in 6.2;
- a resource management process that manages each home resource relation object as specified in 6.4;
- a resource management process that provides the mandatory information specified in Clause 7.

5 Home network resource management

5.1 Information resource categories

To extend the HES interoperability architecture specified in the ISO/IEC 18012 series from products to the management of network resources, several categories of information resources are specified. These categories shall include devices, and may include services, networks and physical spaces, as illustrated in Figure 1. Each category includes elements that shall provide information resources, as described in 6.1 and Figure 2 of ISO/IEC 30100-1:2016. For example, ISO 16739 (IFC) can act as an information resource for the physical elements (floor plan). Also the resource management requires defined representation models for the components of each information category and a mapping method to represent the relations between the categories, which is explained in Clause 6. In this standard, an information category is a synonym for domain information.

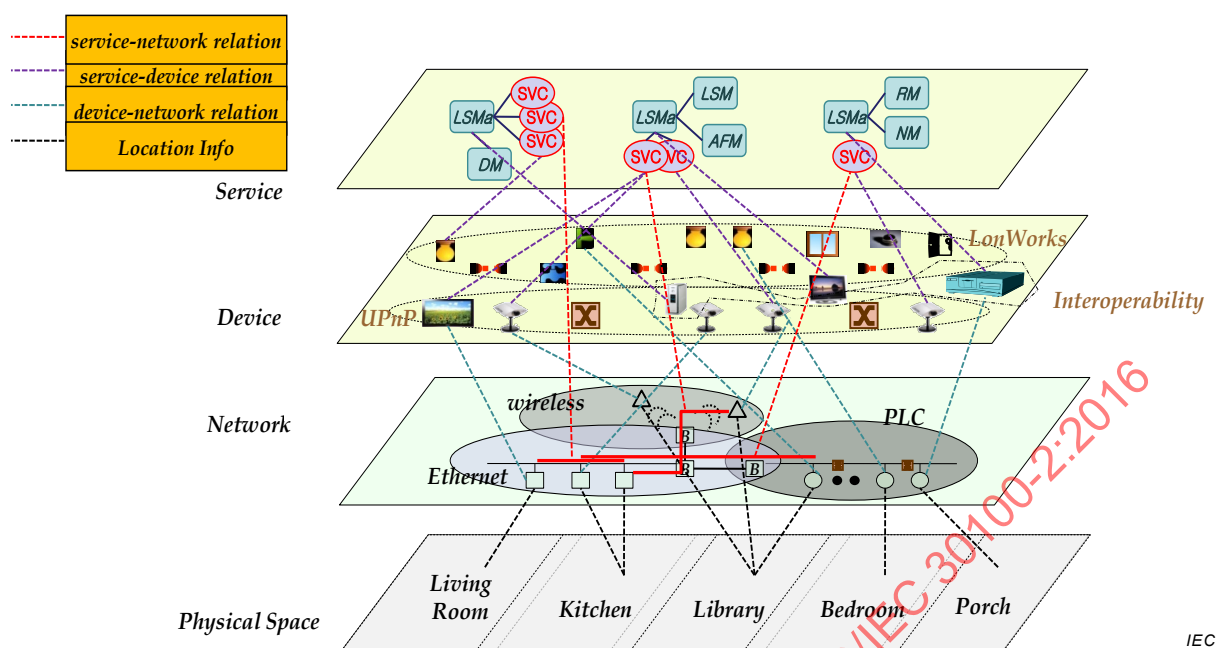


Figure 1 – Logical concept of home resource management architecture

5.2 Architecture

The HNRM system uses the HES interoperability framework (ISO/IEC 18012 series) to integrate resource information from devices, networks and services. This integrated information enables management services such as fault diagnosis and remote management of HES systems.

Figure 2 illustrates the overview of the home network resource management architecture. In Figure 2 the HES interoperability framework applies only to devices (as shown in Figure 1). Because home network resources include more than devices, e.g. network resources or service resources, it is reasonable to expect support in the future for the other elements shown in Figure 1, as are services, networks, and physical spaces. However, the specification of management services for these elements are out of scope for this standard.

The HES interoperability framework in Figure 2 includes an interworking function that translates generic messages of the resource information provider into specific messages of various home network technologies. For example, there is an application for device control or configuration located in the management application in Figure 2. It requests device information about how to control or configure the device for the home resource management process through the HRPI (Home Resource Provider Interface). The home resource management process sends the request from the application to the resource information provider using HRMI (Home Resource Management Interface). The resource information provider relays the request for the device information to the HES interoperability framework via the framework interface. The requested message from the resource information provider to the HES interoperability framework is called a "generic message".

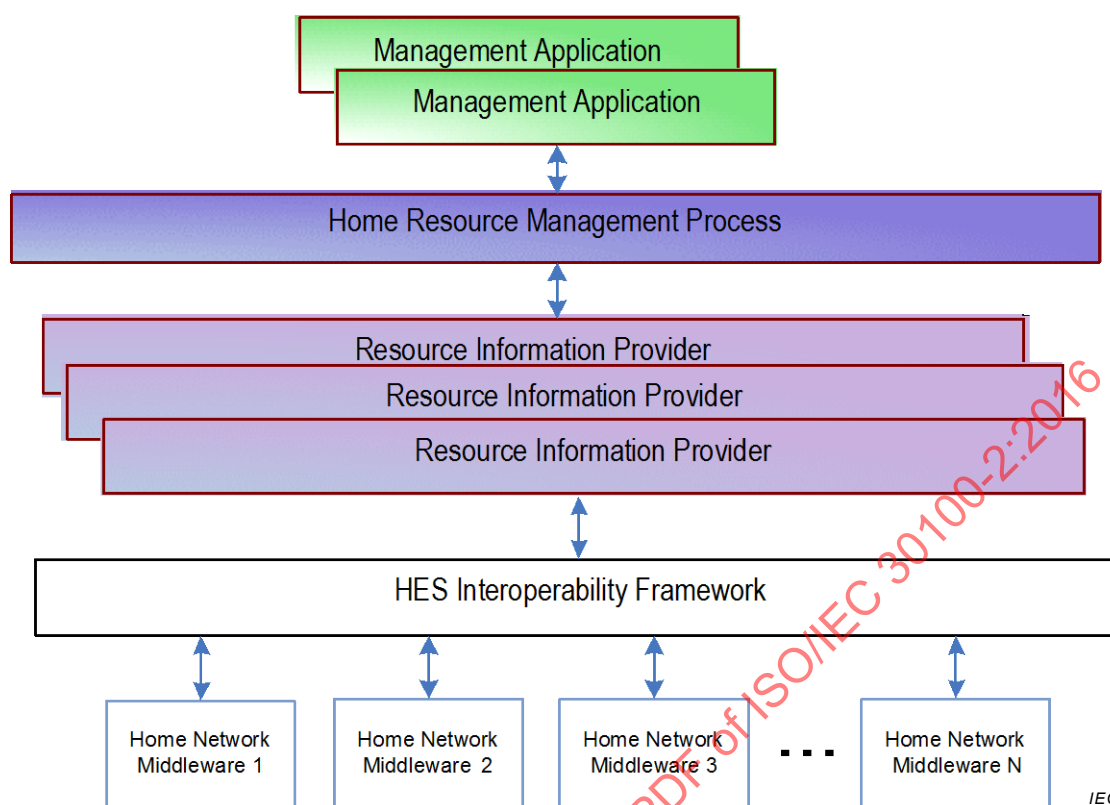


Figure 2 – Overview of the home network resource management architecture

A generic message is sent by the resource information provider to a home application. Devices in a home that implement the application may conform to a variety of home network protocols and applications languages. HES specifies a choice of home network protocols in the ISO/IEC 14543 series. The device developer is responsible for programming the device to translate these generic HNRM messages to device-specific messages conveyed by a home network communications protocol. The tools for this translation are specified by the interworking function in 5.2 of ISO/IEC 18012-2:2012.

ISO/IEC 18012-2 specifies a framework for a common application language using XML structures. A device that is programmed according to ISO/IEC 18012-2 understands this XML-based language in addition to any proprietary application language. This XML language, based on ISO/IEC 18012-2, enables application interoperability among devices. If an application is implemented using a proprietary language, each device or a local proxy for these devices is responsible for translating the XML-based language to any proprietary language. An example of the XML language is provided in Annex A.

The individual device that received the request for device information sends a response message about device information including resource properties, functional capabilities and status to the HES interoperability framework using its specific protocol. When the HES interoperability framework receives the response message from the individual device, it carries out a reverse translation from the specific message to the generic message and sends it to the resource information provider. The translated generic response message in the resource information provider is transmitted to the application through the reverse procedure of that of the request. The application that received device information analyses the information for device control, and then it sends a control request message to the individual device through the same procedure.

An implementation of an application conformant to the HES interoperability framework requires internal management functions to support interoperable application configuration through the interworking function. The internal management functions are described in each device information description. Applications read this device information to determine how to

5.4 Home resource management process

The home resource management process, shown in Figure 4, consists of resource objects and the management information. The home resource management process uses HRPI to collect the resource data from the resource information providers and to transfer control commands back to HES entities via the resource information providers (see 5.6).

As Figure 4 illustrates, the home resource management process creates and maintains resource objects and relation objects based on collected data from resource information providers.

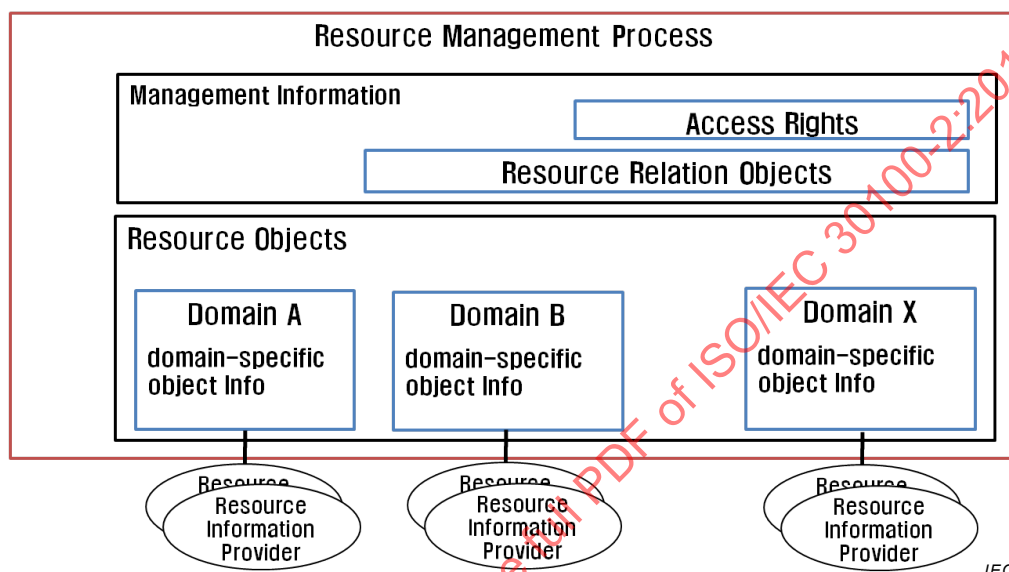


Figure 4 – Resource management process model

The home resource management process categorises resource objects by domain. Each resource object can get an input from one or more resource information providers. Resource objects are mapped to each other with resource relation objects. In this way, it is possible to have one to one or one to many correspondences between the resources in different domains. The resource object and resource relation object are described in Clause 6.

5.5 Management application

A management application is a user process that communicates with a resource management process via HRMI. Through HRMI, a management application can execute diagnostic functions, remote error handling and control of resources by obtaining the information from resource objects and resource relation objects.

The interaction between a management application and the resource management process is presented in Figure 5.

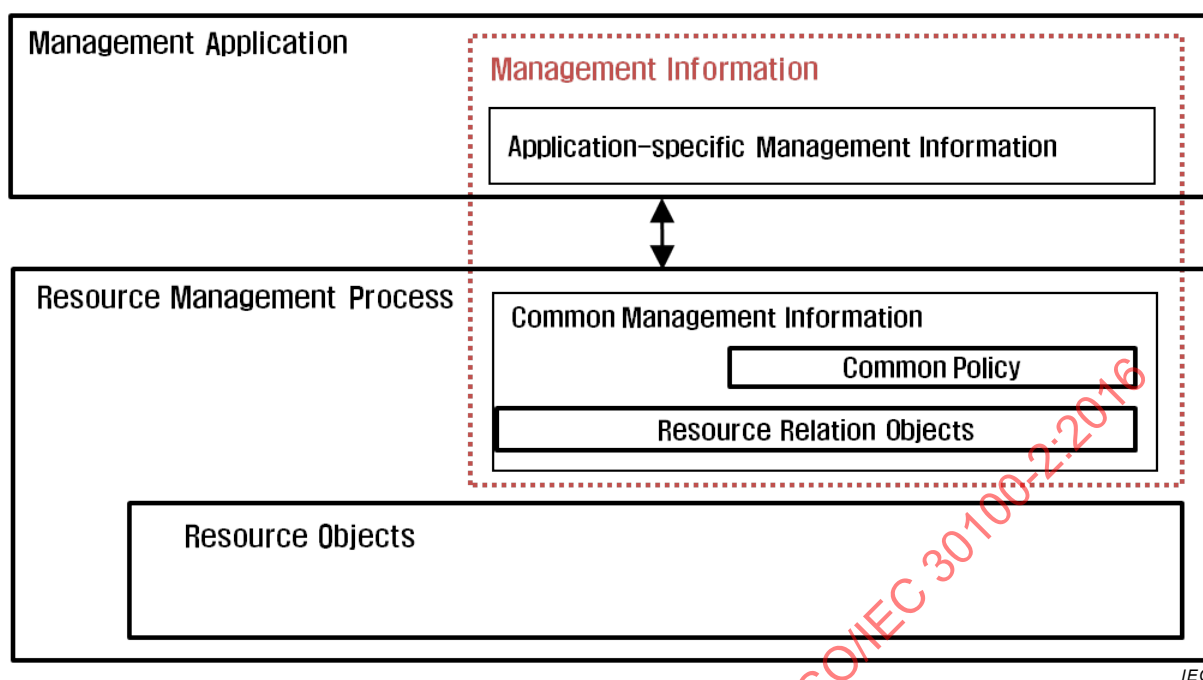


Figure 5 – Management information

As shown in Figure 5, management information comprises the application-specific management information and common management information for resource management process.

Application-specific management information is required by the management application to handle user profiles, policies and application history.

Common management information includes the inter-domain relation information between resource objects and common profile, policy and resource access rights (see 6.5).

5.6 Interface

As illustrated in Figure 6 two different interfaces are required. The first one is HRMI and the second one is HRPI.

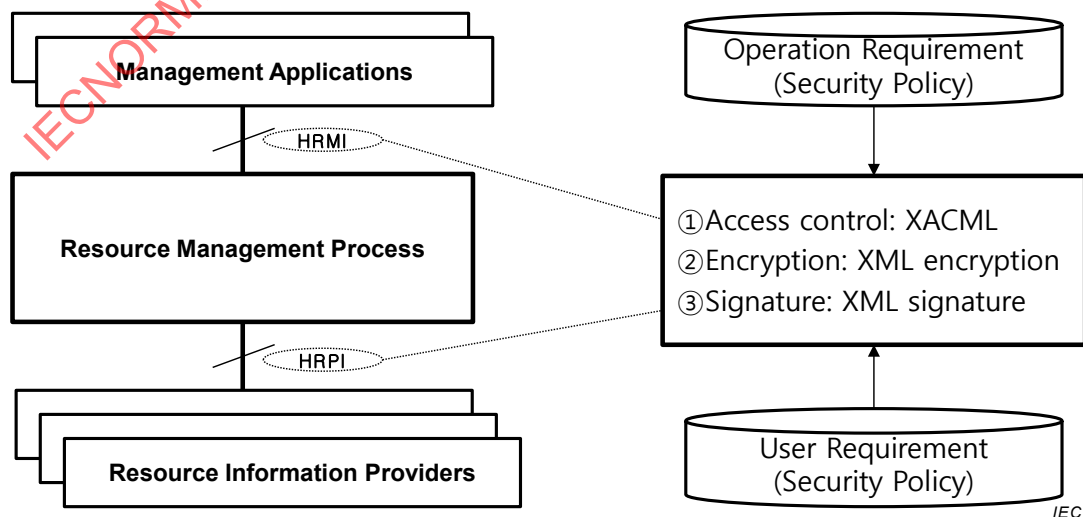


Figure 6 – Interfaces of resource management process

In Figure 6, HRMI and HRPI shall include the data process of access control, encryption and signature as a resource management process, and as a means for security and privacy protection. These processes are the security countermeasures, corresponding to ①, ②, ③, as used in an XML format. Examples of such use cases are shown in Annex B.

These processes are important, because security and privacy resource information is owned by the resource information provider (see Clause 1 of ISO/IEC 30100-1:2016). Also those items represented in XML data to be protected are derived from the operation requirement (security policy) in the management application and from the usage requirement (security policy) in resource information providers. One or more applications for managing privacy information shall include a security standards from the ISO 27000 through ISO 27011 if the management application collects and uses privacy information owned by resource information providers. Also, privacy guidelines, as specified in ISO/IEC 15944-8, which include the OECD privacy guidelines, shall be followed.

HRMI should support the functions that were described in 5.5. HRMI is used for delivering the home resource information including resource objects and resource relation objects to application.

HRPI is used to access resource information providers to obtain data from HES entities as well as to control the HES entities.

6 Home resource model

6.1 Home resource model

The home resource model is an abstract, formal representation of objects in a home that shall include object properties (specified in 6.2), relationships (specified in 6.4) and operations that can be performed on them.

An object is the basic element in the home resource model. There are two types of objects: resource objects and resource relation objects. A resource object represents HES entities in one domain of a home environment. A resource relation object is an object that specifies a relationship among resource objects between the domains.

A home resource model describes home resource information and the relationship among the resource objects. It offers a uniform method for the management of the HES entities. A home resource model shall be represented as a resource description schema consisting of resource objects and resource relation objects. It is used as an input for the HRMI to exchange resource information with other applications or systems.

A home resource model shall accommodate different systems and applications and shall enable distribution of management information among them. Also, home resource information may be utilised by local or remote maintenance, especially for fault diagnosis and resolution. It may also provide means to manage quality of service (QoS) or to automate home control tasks.

6.2 Home resource object

6.2.1 Domain, class and resource object

A home resource object is located within the resource management process in a home environment. A resource object shall contain information from managed elements. It has three levels of hierarchy as shown in Figure 7: (i) domain, (ii) class and (iii) object. An object represents a basic entity in a resource hierarchy. A resource object has a one-to-one relationship with a real-world object. This means that a resource object represents HES. The resource objects are grouped into a class by its common functionality. For example, a light, door lock and gas sensor all belong to the class "Automation" since these objects have a

home automating capability. Finally, the resources are grouped into a domain by the resource type such as device, network, service and physical space. Domain information contains domain-specific resource data of each resource object. Domain information is also utilised for managing the intra-domain relation information of resource object. A home resource model usually has several domains based on the number of resources it manages.

The number of the domains and classes might be added and deleted depending on the characteristics of the resources the application manages. This specification categorises classes by the function of the resources. Annex C illustrates an example of the classes in domains.

IECNORM.COM : Click to view the full PDF of ISO/IEC 30100-2:2016

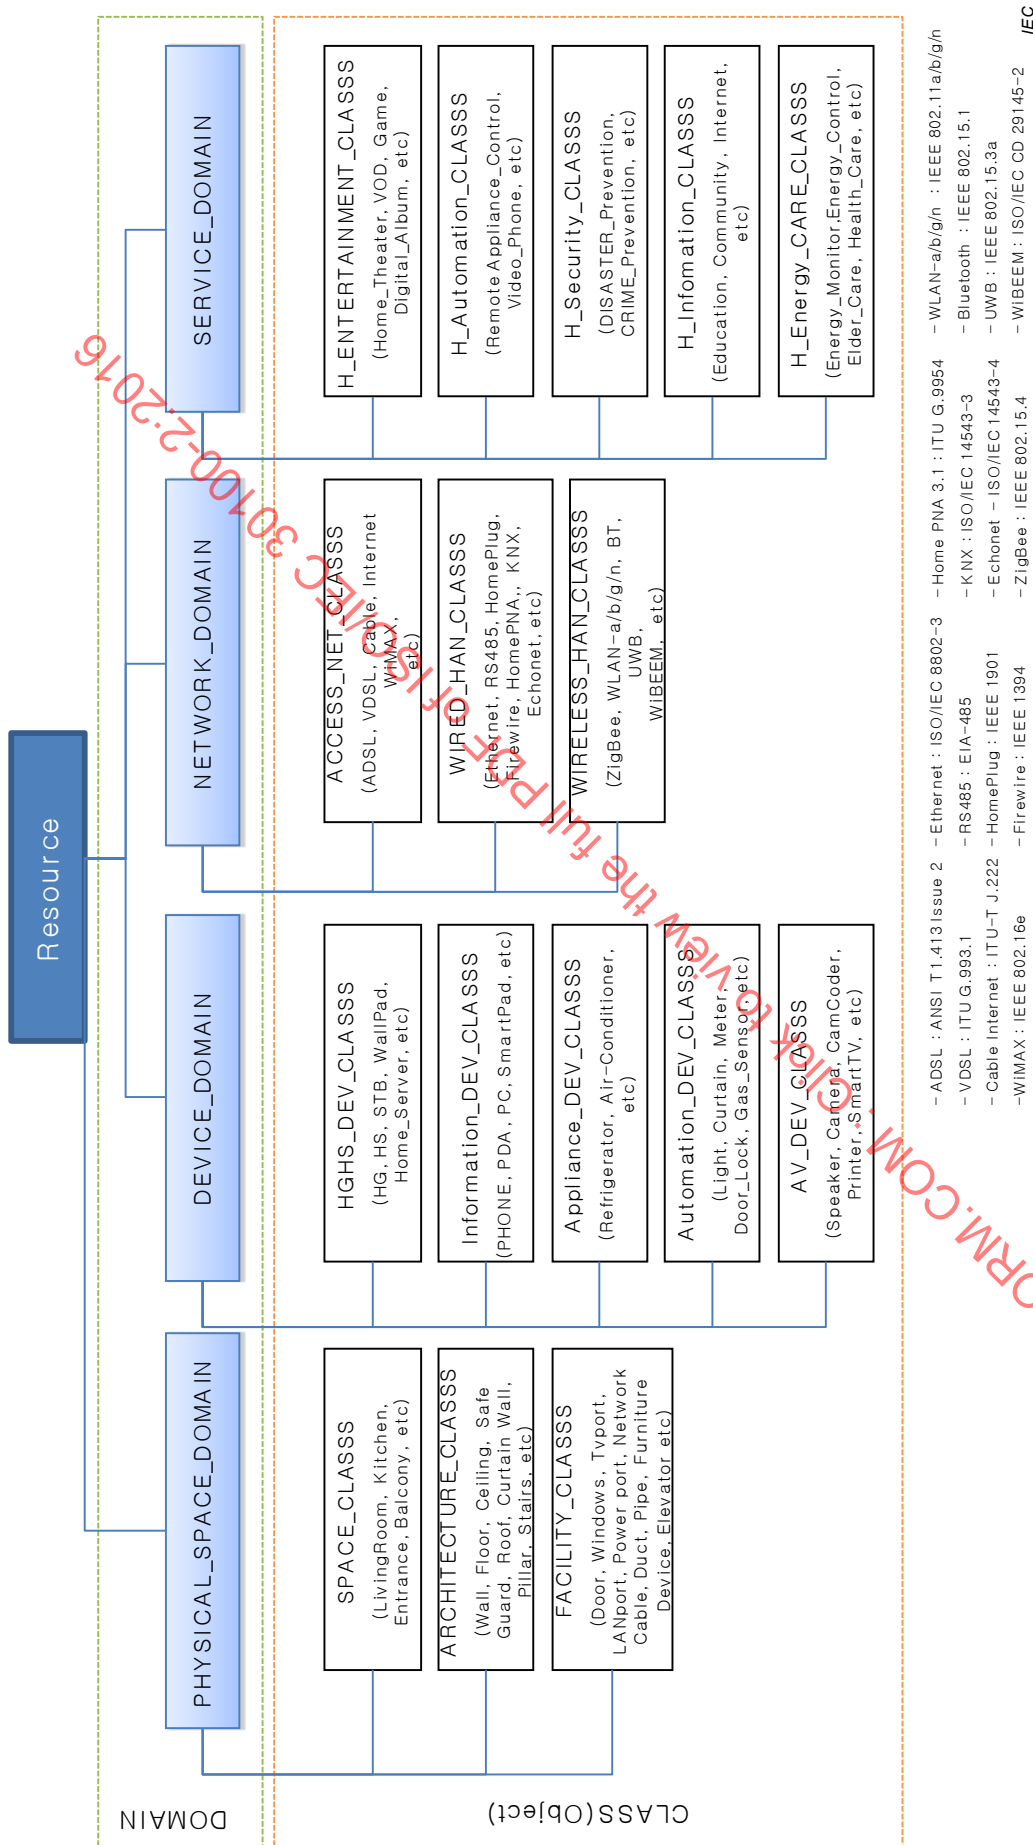


Figure 7 – Resource object hierarchy

6.2.2 Resource object structure

As shown in Figure 8, a resource object consists of common and domain-specific object information.

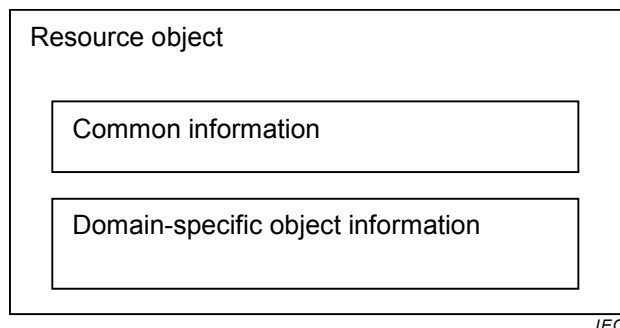


Figure 8 – Resource object structure

Common information of resource object includes the following information.

- Resource identifier

A resource identifier is a unique identifier to identify an object in a resource management process. It consists of a couple, <domain id, object id>, as shown in Table 2. A domain id is a domain identifier where the resource object belongs. An object id is a unique identifier to identify an object in a domain.

Table 2 – Definition of resource domain ID

Domain name	Domain ID	Description
DEVICE_DOMAIN	0x01	Domain ID for device resources
PHYSICAL_SPACE_DOMAIN	0x02	Domain ID for physical space resources
NETWORK_DOMAIN	0x03	Domain ID for network resources
SERVICE_DOMAIN	0x04	Domain ID for service resources

- Resource name

A resource name is the name of the resource object based on domain-specific information. It is a character string.

- Resource type

This is a type of a resource. It is a hexadecimal number. The Resource type is created using the class and the sub-class of the resource object. A resource object can only have one class. The sub-classes are defined on the basis of the classes described in 6.2.1. A sub-class is a more specific description of the resource object. The classification of the resource types for each domain is explained in C.2.

6.3 Domain-specific information

6.3.1 General

Domain-specific information contains domain-related data. Therefore, this information varies depending on the domain type. The format of the domain specific information is determined by the domain ID in the common information. This standard defines only the device domain specific information. The device domain specific information contains the following data.

6.3.2 Device specific information

Device specific information includes type, name, ID, the list of functions supported by the device and the current status of device and device specific elements such as physical address, version, manufacturer, location and distributed data of each device. For clear classification, the device specific information is categorised into five small groups such as basic property, function property, status property, connectivity property and additional property.

“Basic property” means the basic elements to represent the device such as ID, name, type and interface information. The functional property covers the lists of functions the device can support, and the status property includes device status, function status and network status. These three properties are mandatory, and the others are optional. The connectivity property covers the lists of neighbors connected to the device, and the additional property includes hardware, software and detail information of the device. The associated elements and attributes are described in 7.2.

6.3.3 Network specific information

Network specific information includes type, name, ID, current status of the network and network specific elements such as topology, link status or throughput information and the number of links. For clear classification, the network specific information is categorised into four small groups such as basic property, status property, connectivity property and additional property.

The basic property literally means the basic elements needed to represent the device such as ID, name, type and throughput information. The status property provides network status by using traffic, response time or loss rate. These two properties are mandatory, and the others are optional. The connectivity property covers the lists of neighbors or parent/child information connecting the link, and the additional property includes a detailed description of the link. The associated elements and attributes are described in 7.3.

6.3.4 Physical space specific information

Specific information about physical space includes ID, name and type of each physical space element to help the user improve comprehension of architecture information. For clear classification, the physical space specific information is categorised into two small groups such as basic property and additional property.

The basic property means the basic elements needed to represent physical space such as ID, name and type information. The additional properties include project, material, attribute, polygonal mesh and drawing file information of the physical space. The basic property is mandatory, and the others are optional. The associated element and attributes are described in 7.4.

6.3.5 Service specific information

Service specific information includes type, name, ID, the list of functions service support, current status of service and specific elements such as vendor, release number, priority and required specification of each service. For clear classification, the service specific information is categorised into four small groups such as basic property, function property, status property and additional property.

The basic property literally means the basic elements to represent devices such as ID, name, type, user type, priority, version, creation date, release number, size and description information. The status property includes service status, function status and process status. These two properties are mandatory, and the others are optional. The functional property covers the lists of functions the service can support, and the additional property includes location URI, starting type, required hardware, required software, required protocol specification and user interface detail about the service. The associated elements and attributes are described in 7.5.

6.4 Home resource relation object

6.4.1 Definition

The home resource relation object is an object that specifies a relationship among resource objects. The home resource relation object only deals with the inter-domain relationships. The intra-domain relationships among resource objects are covered by the domain-specific information stored in resource objects.

A relation object shown in Figure 9 is represented as *<relation_id, relation_name, relation_type, src_resource_id, a list of target resource id>*

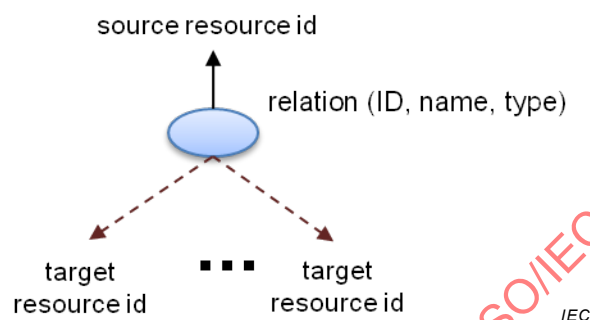


Figure 9 – Home resource relation object

- Relation id
A unique identifier of the relation in a resource management process.
- Relation name
Name of the relation. It consists of a character string.
- Relation type
Type of the relation. This represents the relationship between domains of resource objects. The relation types are summarised in Table 3.
- Source resource object
The resource identifier of the source object.
- A list of target resource id
This is a list of target resource id.

Table 3 – Resource relation types

Relation type	Description
RELTYPE_CONTAIN	Hierarchical relation between resource objects. This relation type is used between device-domain and content-domain, device-domain and service-domain, content-domain and content-domain and physical space-domain and physical space-domain. For example, a content resource object can be contained in a device resource object. This relationship is represented RELTYPE_CONTAIN.
RELTYPE_SAMEAS	Equivalent relation between resource objects. This relation type is used between device-domain and physical space-domain, physical space-domain and network-domain, device-domain and device-domain, and network-domain and network-domain. For example, physical space resource objects include physical network line. The relationship between the physical resource object and the network resource object is represented RELTYPE_SAMEAS.
RELTYPE_CONNECT	Network topology relation between resource objects. This relation type is used between device-domain and network-domain.
RELTYPE_LOCATE	Physical spatial relation between resource objects. This relation type is used between device-domain and physical space-domain. For example, a device resource object is in a physical space object. This relationship is represented RELTYPE_LOCATE.
RELTYPE_BIND	Binding relation between resource objects. This relation type is used between device-domain and service-domain.
RELTYPE_CONSUME	Consuming relation between resource objects. This relation type is used between service-domain and content-domain.
RELTYPE_INSTALL	Installing relation between resource objects. This relation type is used between network-domain and physical space-domain. For example, a network link is installed in walls. The relationship between the network resource object, the network link, and the physical space objects, the walls, is represented RELTYPE_INSTALL.
RELTYPE_USE	Using relation between resource objects. This relation type is used between service-domain and service-domain.
RELTYPE_RUN	Running relation between resource objects. This relation type is used between network-domain and service-domain.
RELTYPE_DELIVER	Delivering relation between resource objects. This relation type is used between network-domain and content-domain.

6.4.2 BNF notation of resource relation object

The resource relation object is also represented as a BNF notation. Table 4 illustrates a BNF notation of the relation resource object.

Table 4 – BNF notation of resource relation object

```

RelationObject ::= <relation_id><relation_name><relation_type><src_resource_id>
                  {<target_resource_id>} +

<relation_id> ::= <identifier>
<relation_name> ::= <string>
<relation_type> ::= <inter_domain_relation>
<inter_domain_relation> ::= <hexadecimal number>
<src_resource_id> ::= <resource_id>
<target_resource_id> ::= <resource_id>
<string> ::= {alpha-numeric}+
<identifier> ::= alpha {<alpha_numeric>}*
<hexadecimal number> ::= 0{x|X}{<hexadecimal digit>}+
<integer> ::= {+ | -} {<numeric>}+
<alpha_numeric> ::= <alpha> | <numeric>
<hexadecimal digit> ::= <numeric> | A|B|C|D|E|F|a|b|c|d|e|f
<alpha> ::= any alphabetic character a through z or A through Z
<numeric> ::= any digit 0 through 9

```

6.5 Miscellaneous

6.5.1 Relationship generation methods

The relationships among the home resources shall be defined for the management process. There are three methods for generating relationships between the resource objects. First, users or a home network manager shall input the relationship information explicitly in a pre-defined format. They set some basic relationships for the resource management. Second, the resource information providers shall provide the relationship data. The resource information provider may provide the additional relationships since it is able to gather more detailed resource information using its applications such as a location-positioning agent. Third, an automatic generation method may be used. The automatic method is achieved by the analysis of internal events or messages in the resource management process. In this case, intelligent algorithms may be applied.

6.5.2 Common policy

A home network manager or user may limit the usage of the home resources. A common policy is used in the resource management process. It describes the basic principles of the home resource usage and management. A common policy is applied whenever someone accesses any home resources in a home network environment. A common policy includes at least an administrative policy and a user policy.

An administrative policy specifies the rules for the relationship generation between the home resources. It contains the conditions for the relationship generation and provides the priority of relationship generation rules when relationships, which are generated by 6.5.1, may conflict with each other. Also, it specifies the mapping rules for the generation of inter-domain relationships and conditions.

User policy describes the personal information and preferences of the home network users including account information. It also includes an access rights control. Access rights determine who can access to a home resource and what functions are allowed in a home resource management process.

6.5.3 Privacy

This standard does not impose requirements for dealing with privacy issues when communicating between the home network management process and management applications on the local home area network, as shown in Figure 2.


7 Home network resource information modeling

7.1 Overview

This clause specifies the information model for each information domain. The information in this model can be classified as mandatory and optional. The solid line in the model represents mandatory information. Optional information is represented as a dotted line. The optional information describes additional information for a resource object. User-defined information is defined as optional. The user-defined information consists of three attributes: name, value and description. The user-defined attributes are used to define the proprietary information or the information that is not defined in this data model. The blue coloured text in the diagram means that the value of the field “type” in the XML classes shown in 7.2 is derived from a base “type” to extend or to restrict a “type”.

7.2 Device-specific information modelling

element HRML

diagram	 <pre> classDiagram class HRML { DeviceDescription } class DeviceDescription { type DeviceDescriptionType } HRML --> DeviceDescription </pre>
properties	content complex
children	DeviceDescription
source	<pre> <xsd:element name="HRML"> <xsd:complexType> <xsd:choice> <xsd:element name="DeviceDescription" type="DeviceDescriptionType"/> </xsd:choice> </xsd:complexType> </xsd:element> </pre>
description	Home resource management markup language. Container for resource information including device, network, physical space, service and so on.

element HRML/DeviceDescription

diagram	
properties	isRef 0 content complex
children	BasicProperty FunctionProperty StatusProperty ConnectivityProperty AdditionalProperty
source	<xsd:element name="DeviceDescription" type="DeviceDescriptionType"/>
description	Container for device description of HRML

element DeviceDescriptionType/BasicPropertyType

diagram	The diagram illustrates the structure of the BasicPropertyType element. It is a complex type containing the following attributes in sequence: DeviceID: type <code>xsd:string</code> DeviceName: type <code>xsd:string</code> DeviceType: type <code>xsd:string</code> SecurityLevel: type <code>xsd:string</code> PrivacyLevel: type <code>xsd:string</code> SubName: type <code>xsd:string</code> Manufacture: type <code>xsd:string</code> Date: type <code>xsd:date</code> DeviceLocation: type <code>xsd:string</code> InterfaceList: type <code>InterfaceListType</code> (cardinality 1)
properties	isRef 0 content complex
children	DeviceID DeviceName DeviceType SecurityLevel PrivacyLevel SubName Manufacture Date DeviceLocation InterfaceList
source	<xsd:element name="BasicProperty" type="BasicPropertyType"/>
description	Basic information of device

element BasicPropertyType/DeviceID

diagram	
properties	isRef 0 content simple
source	<xsd:element name="DeviceID" type="xsd:string"/>
description	ID of device

element BasicPropertyType/DeviceName

diagram	
properties	isRef 0 content simple
source	<xsd:element name="DeviceName" type="xsd:string"/>
description	Name of device

element BasicPropertyType/DeviceType

diagram	
properties	isRef 0 content simple
source	<xsd:element name="DeviceType" type="xsd:string"/>
description	Type of device


element BasicPropertyType/SecurityLevel

diagram	
properties	isRef 0 content simple
source	<xsd:element name="SecurityLevel" type="string"/>
description	SecurityLevel of device


element BasicPropertyType/PrivacyLevel

diagram	
properties	isRef 0 content simple
source	<xsd:element name="PrivacyLevel" type="string"/>
description	PrivacyLevel of device

element BasicPropertyType/SubName

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="SubName" type="xsd:string" minOccurs="0"/>
description	Subname of device

element BasicPropertyType/Manufacture

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="Manufacture" type="xsd:string" minOccurs="0"/>
description	Manufacture name of device

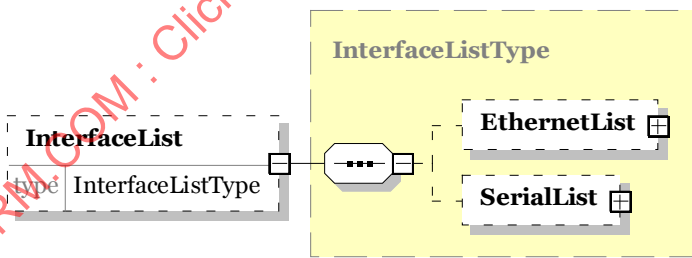
element BasicPropertyType/Date

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="Date" type="xsd:date" minOccurs="0"/>
description	Distribution date of device

element BasicPropertyType/DeviceLocation

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="DeviceLocation" type="xsd:string" minOccurs="0"/>
description	Location of device. It can be defined coordinates or pre-defined physical space.

element BasicPropertyType/InterfaceList

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	EthernetList SerialList
source	<xsd:element name="InterfaceList" type="InterfaceListType" minOccurs="0"/>
description	Lists of interface

element InterfaceListType/EthernetList

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	Ethernet
attributes	Name numofethernet Type xsd:integer Use required
source	<pre> <xsd:element name="EthernetList" minOccurs="0"> <xsd:complexType> <xsd:sequence> <xsd:element name="Ethernet" maxOccurs="unbounded"> <xsd:complexType> <xsd:sequence> <xsd:element name="InterfaceType" type="EthernetType"/> <xsd:element name="InterfaceID" type="xsd:hexBinary"/> <xsd:element name="PhysicalAddress" type="xsd:string"/> <xsd:element name="IPAddress" type="xsd:string"/> <xsd:element name="Gateway" type="xsd:string"/> <xsd:element name="Subnet" type="xsd:string"/> <xsd:element name="DNS" type="xsd:string"/> <xsd:element name="MaxThroughput" type="ThroughputType"/> </xsd:sequence> </xsd:complexType> </xsd:element> </xsd:sequence> <xsd:attribute name="numofethernet" type="xsd:integer" use="required"/> </xsd:complexType> </xsd:element> </pre>
description	Lists of Ethernet interface


attribute InterfaceListType/EthernetList/@numofethernet

properties	isRef 0 use required
source	<xsd:attribute name="numofethernet" type="xsd:integer" use="required"/>
description	Number of Ethernet interface

element InterfaceListType/EthernetList/Ethernet

diagram	
properties	isRef 0 minOcc 1 maxOcc unbounded content complex
children	InterfaceType InterfaceID PhysicalAddress IPAddress Gateway Subnet DNS MaxThroughput
source	<pre> <xsd:element name="Ethernet" maxOccurs="unbounded"> <xsd:complexType> <xsd:sequence> <xsd:element name="InterfaceType" type="EthernetType"/> <xsd:element name="InterfaceID" type="xsd:hexBinary"/> <xsd:element name="PhysicalAddress" type="xsd:string"/> <xsd:element name="IPAddress" type="xsd:string"/> <xsd:element name="Gateway" type="xsd:string"/> <xsd:element name="Subnet" type="xsd:string"/> <xsd:element name="DNS" type="xsd:string"/> <xsd:element name="MaxThroughput" type="ThroughputType"/> </xsd:sequence> </xsd:complexType> </xsd:element> </pre>
description	Ethernet interface information of device


element InterfaceListType/EthernetList/Ethernet/InterfaceType

diagram	
properties	isRef 0 content simple
facets	enumeration IPV4 enumeration IPV6
source	<xsd:element name="InterfaceType" type="EthernetType"/>
description	Information of Ethernet interface type

simpleType EthernetType

used by	element InterfaceListType/EthernetList/Ethernet/InterfaceType
facets	enumeration IPV4 enumeration IPV6
source	<pre><xsd:simpleType name="EthernetType"> <xsd:restriction base="xsd:string"> <xsd:enumeration value="IPV4"/> <xsd:enumeration value="IPV6"/> </xsd:restriction> </xsd:simpleType></pre>
description	Type of EthernetType

element InterfaceListType/EthernetList/Ethernet/InterfaceID

diagram	
properties	isRef 0 content simple
source	<xsd:element name="InterfaceID" type="xsd:hexBinary"/>
description	ID of Ethernet interface

element InterfaceListType/EthernetList/Ethernet/PhysicalAddress

diagram	
properties	isRef 0 content simple
source	<xsd:element name="PhysicalAddress" type="xsd:string"/>
description	Physical address of Ethernet interface


element InterfaceListType/EthernetList/Ethernet/IPAddress

diagram	
properties	isRef 0 content simple
source	<xsd:element name="IPAddress" type="xsd:string"/>
description	IP address of Ethernet interface

element InterfaceListType/EthernetList/Ethernet/Gateway

diagram	
properties	isRef 0 content simple
source	<xsd:element name="Gateway" type="xsd:string"/>
description	Gateway information of Ethernet interface

element InterfaceListType/EthernetList/Ethernet/Subnet

diagram	
properties	isRef 0 content simple
source	<xsd:element name="Subnet" type="xsd:string"/>
description	Subnet information of Ethernet interface

element InterfaceListType/EthernetList/Ethernet/DNS

diagram	
properties	isRef 0 content simple
source	<xsd:element name="DNS" type="xsd:string"/>
description	DNS information of Ethernet interface

element InterfaceListType/EthernetList/Ethernet/MaxThroughput

diagram	The diagram illustrates the structure of the MaxThroughput element. It is a complex type derived from ThroughputType. The MaxThroughput element has a single attribute unit of type ThroughputUnitType. The ThroughputUnitType is a simple type with a default value of bps.
properties	isRef 0 content complex
Attributes	Name unit Type ThroughputUnitType Default bps
Source	<xsd:element name="MaxThroughput" type="ThroughputType"/>
Description	Maximum throughput of Ethernet interface

simpleType ThroughputUnitType

used by	attribute ThroughputType/@unit
facets	enumeration bps enumeration kbps enumeration mbps enumeration gbps
source	<xsd:simpleType name="ThroughputUnitType"> <xsd:restriction base="xsd:string"> <xsd:enumeration value="bps"/> <xsd:enumeration value="kbps"/> <xsd:enumeration value="mbps"/> <xsd:enumeration value="gbps"/> </xsd:restriction> </xsd:simpleType>
description	Type of throughput unit

element InterfaceListType/SerialList

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	Serial
attributes	Name numofserial Type xsd:integer Use required
source	<pre> <xsd:element name="SerialList" minOccurs="0"> <xsd:complexType> <xsd:sequence> <xsd:element name="Serial" maxOccurs="unbounded"> <xsd:complexType> <xsd:sequence> <xsd:element name="InterfaceType" type="xsd:string"/> <xsd:element name="InterfaceID" type="xsd:hexBinary"/> <xsd:element name="DataRate" type="xsd:string"/> <xsd:element name="DataBits" type="xsd:string"/> <xsd:element name="StopBits" type="xsd:string"/> <xsd:element name="Parity" type="xsd:string"/> <xsd:element name="FlowControl" type="xsd:string"/> </xsd:sequence> </xsd:complexType> </xsd:element> </xsd:sequence> <xsd:attribute name="numofserial" type="xsd:integer" use="required"/> </xsd:complexType> </xsd:element> </pre>
description	Lists of serial interface


attribute InterfaceListType/SerialList/@numofserial

properties	isRef 0 use required
source	<xsd:attribute name="numofserial" type="xsd:integer" use="required"/>
description	Number of serial interface


element InterfaceListType/SerialList/Serial

diagram	<pre> graph LR Serial[Serial 1..unbounded] --> InterfaceType[InterfaceType xsd:string] Serial --> InterfaceID[InterfaceID xsd:hexBinary] Serial --> Baudrate[Baudrate xsd:string] Serial --> DataBits[DataBits xsd:string] Serial --> StopBits[StopBits xsd:string] Serial --> Parity[Parity xsd:string] Serial --> FlowControl[FlowControl xsd:string] </pre>
properties	isRef 0 minOcc 1 maxOcc unbounded content complex
children	InterfaceType InterfaceID Datarate DataBits StopBits Parity FlowControl
source	<pre> <xsd:element name="Serial" maxOccurs="unbounded"> <xsd:complexType> <xsd:sequence> <xsd:element name="InterfaceType" type="xsd:string"/> <xsd:element name="InterfaceID" type="xsd:hexBinary"/> <xsd:element name="Datarate" type="xsd:string"/> <xsd:element name="DataBits" type="xsd:string"/> <xsd:element name="StopBits" type="xsd:string"/> <xsd:element name="Parity" type="xsd:string"/> <xsd:element name="FlowControl" type="xsd:string"/> </xsd:sequence> </xsd:complexType> </xsd:element> </pre>
description	Serial interface information of device


element InterfaceListType/SerialList/Serial/InterfaceType

diagram	
properties	isRef 0 content simple
source	<xsd:element name="InterfaceType" type="xsd:string"/>
description	Type of serial interface


element InterfaceListType/SerialList/Serial/InterfaceID

diagram	
properties	isRef 0 content simple
source	<xsd:element name="InterfaceID" type="xsd:hexBinary"/>
description	ID of serial interface

element InterfaceListType/SerialList/Serial/Datarate

diagram	
properties	isRef 0 content simple
source	<xsd:element name="Datarate" type="xsd:string"/>
description	Datarate of serial interface


element InterfaceListType/SerialList/Serial/DataBits

diagram	
properties	isRef 0 content simple
source	<xsd:element name="DataBits" type="xsd:string"/>
description	Data bits of serial interface


element InterfaceListType/SerialList/Serial/StopBits

diagram	
properties	isRef 0 content simple
source	<xsd:element name="StopBits" type="xsd:string"/>
description	Stop bits of serial interface


element InterfaceListType/SerialList/Serial/Parity

diagram	
properties	isRef 0 content simple
source	<xsd:element name="Parity" type="xsd:string"/>
description	Parity of serial interface


element InterfaceListType/SerialList/Serial/FlowControl

diagram	
properties	isRef 0 content simple
source	<xsd:element name="FlowControl" type="xsd:string"/>
description	Flow control of serial interface

element DeviceDescriptionType/FunctionProperty

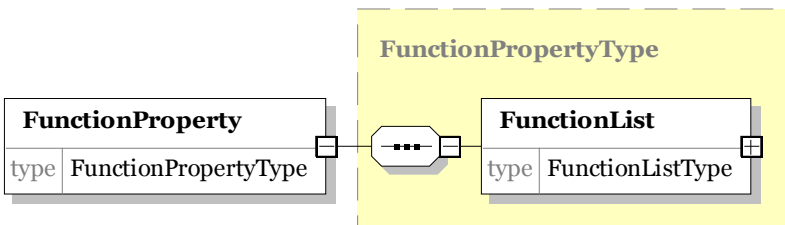diagram	
properties	isRef 0 content complex
children	FunctionList
source	<xsd:element name="FunctionProperty" type="FunctionPropertyType"/>
description	Function information of device

element FunctionPropertyType/FunctionList

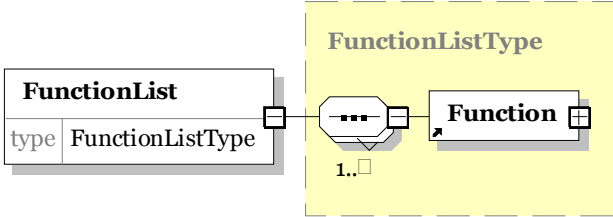
diagram	 The diagram illustrates the structure of the FunctionList element. It is an element of type FunctionListType. The FunctionList element contains a sequence of Function elements. The FunctionListType is highlighted in a yellow box. The Function element is shown with a cardinality of 1..∞.
properties	isRef 0 content complex
children	Function
source	<xsd:element name="FunctionList" type="FunctionListType"/>
description	Lists of Function

IECNORM.COM : Click to view the full PDF of ISO/IEC 30100-2:2016


element Function

diagram	
properties	content complex
children	FunctionName FunctionNameDescription FunctionID Sharable Category InputListSize InputList OutputListSize OutputList
used by	complexType FunctionListType
source	<pre> <xsd:element name="Function"> <xsd:complexType> <xsd:sequence> <xsd:element name="FunctionName" type="xsd:string"/> <xsd:element name="FunctionNameDescription" type="xsd:string"/> <xsd:element name="FunctionID" type="xsd:string"/> <xsd:element name="Sharable" type="xsd:integer"/> <xsd:element ref="Category"/> <xsd:element name="InputListSize" type="xsd:string" minOccurs="0"/> <xsd:element name="InputList" type="InputListType" minOccurs="0"/> <xsd:element name="OutputListSize" type="xsd:string" minOccurs="0"/> <xsd:element name="OutputList" type="OutputListType" minOccurs="0"/> </xsd:sequence> </xsd:complexType> </xsd:element> </pre>
description	Specific functions of single device


element Function/FunctionName

diagram	
properties	isRef 0 content simple
source	<xsd:element name="FunctionName" type="xsd:string"/>
description	Name of a Function


element Function/FunctionNameDescription

diagram	
properties	isRef 0 content simple
source	<xsd:element name="FunctionNameDescription" type="xsd:string"/>
description	Name-description of a Function

element Function/FunctionID

diagram	
properties	isRef 0 content simple
source	<xsd:element name="FunctionID" type="xsd:string"/>
description	ID of a Function

element Function/Sharable

diagram	
properties	isRef 0 content simple
source	<xsd:element name="Sharable" type="xsd:integer"/>
description	Sharable capacity of function. 0 presents unlimited, 1 presents exclusive and another integer number presents the number of capacity

element Category

diagram	
properties	content complex
used by	element
facets	enumeration Sensor enumeration Control enumeration Actuator
attributes	Name Type Use Default Fixed annotation
source	<pre> <xsd:element name="Category"> <xsd:complexType> <xsd:simpleContent> <xsd:restriction base="CategoryType"> <xsd:enumeration value="Sensor"/> <xsd:enumeration value="Control"/> <xsd:enumeration value="Actuator"/> </xsd:restriction> </xsd:simpleContent> </xsd:complexType> </xsd:element> </pre>
description	Category of message such as Sensor message, Control message, or Actuator message

element Function/InputListSize

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<pre> <xsd:element name="InputListSize" type="xsd:string" minOccurs="0"/> </pre>
description	Number of Input and Inputs

element Function/InputList

diagram	The diagram illustrates the structure of the InputList element. It is defined by the InputListType. The InputList element has a type of InputListType. The InputListType has an attribute size of type xsd:integer with a required use. The InputListType contains two child elements: Input (type Input, minOccurs=0) and Inputs (type Inputs, derivedBy=extension, minOccurs=0). The Inputs element is derived from Input by extension.
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	Input Inputs
attributes	Name size Type xsd:integer Use required
source	<xsd:element name="InputList" type="InputListType" minOccurs="0"/>
description	List of Input and Inputs

attributes	Name id Type xsd:string Use optional Name name Type xsd:string Use optional Name valueunit Type xsd:string Use optional Name min Type xsd:string Use optional Name max Type xsd:string Use optional Name default Type xsd:string Use optional Name desc Type xsd:string Use optional Name type Type xsd:string Use optional
source	<pre> <xsd:element name="Data"> <xsd:complexType> <xsd:simpleContent> <xsd:extension base="xsd:string"> <xsd:attribute name="id" type="xsd:string" use="optional"/> <xsd:attribute name="name" type="xsd:string"/> <xsd:attribute name="valueunit" type="UnitType" use="optional"/> <xsd:attribute name="min" type="xsd:string" use="optional"/> <xsd:attribute name="max" type="xsd:string" use="optional"/> <xsd:attribute name="default" type="xsd:string" use="optional"/> <xsd:attribute name="desc" type="xsd:string" use="optional"/> <xsd:attribute name="type" type="xsd:string" use="optional"/> </xsd:extension> </xsd:simpleContent> </xsd:complexType> </xsd:element> </pre>
description	Current value of Input/Output

attribute Data/@id

properties	isRef 0 use optional
source	<xsd:attribute name="id" type="xsd:string" use="optional"/>
description	ID of single Data

attribute Data/@name

properties	isRef 0
source	<xsd:attribute name="name" type="xsd:string"/>
description	Name of single Data

attribute Data/@valueunit

properties	isRef 0 use optional
source	<xsd:attribute name="valueunit" type="UnitType" use="optional"/>
description	Value-Unit of single Data

attribute Data/@min

properties	isRef 0 use optional
source	<xsd:attribute name="min" type="xsd:string" use="optional"/>
description	Minimum-value of single Data

attribute Data/@max

properties	isRef 0 use optional
source	<xsd:attribute name="max" type="xsd:string" use="optional"/>
description	Maximum-value of single Data

attribute Data/@default

properties	isRef 0 use optional
source	<xsd:attribute name="default" type="xsd:string" use="optional"/>
description	Default-value of single Data

attribute Data/@desc

properties	isRef 0 use optional
source	<xsd:attribute name="desc" type="xsd:string" use="optional"/>
description	Description of single Data

attribute Data/@type


properties	isRef 0 use optional
source	<xsd:attribute name="type" type="xsd:string" use="optional"/>
description	Type of single Data

IECNORM.COM : Click to view the full PDF of ISO/IEC 30100-2:2016

element InputListType/Inputs

diagram																			
properties	isRef 0 minOcc 0 maxOcc unbounded content complex																		
children	Input																		
attributes	<table> <tr> <td>Name</td><td>size</td></tr> <tr> <td>Type</td><td>xsd:integer</td></tr> <tr> <td>Use</td><td>required</td></tr> </table> <table> <tr> <td>Name</td><td>id</td></tr> <tr> <td>Type</td><td>xsd:string</td></tr> <tr> <td>Use</td><td>optional</td></tr> </table> <table> <tr> <td>Name</td><td>name</td></tr> <tr> <td>Type</td><td>xsd:string</td></tr> <tr> <td>Use</td><td>optional</td></tr> </table>	Name	size	Type	xsd:integer	Use	required	Name	id	Type	xsd:string	Use	optional	Name	name	Type	xsd:string	Use	optional
Name	size																		
Type	xsd:integer																		
Use	required																		
Name	id																		
Type	xsd:string																		
Use	optional																		
Name	name																		
Type	xsd:string																		
Use	optional																		
source	<pre> <xsd:element name="Inputs" minOccurs="0" maxOccurs="unbounded"> <xsd:complexType> <xsd:complexContent> <xsd:extension base="Inputs"/> </xsd:complexContent> </xsd:complexType> </xsd:element> </pre>																		
description	Several containers of request parameters for control																		


element Inputs/Input

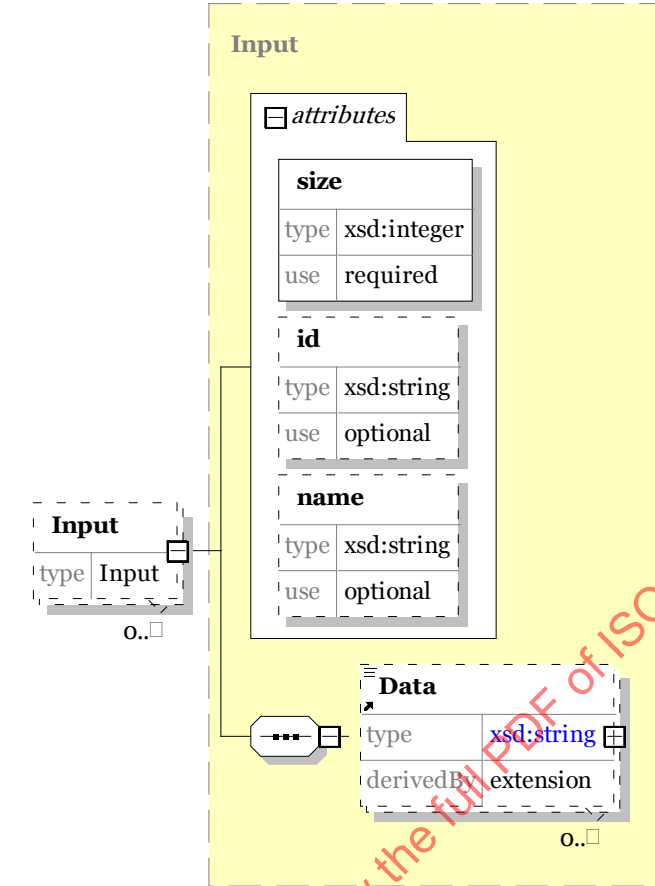diagram																			
properties	<table><tr><td>isRef</td><td>0</td></tr><tr><td>minOcc</td><td>0</td></tr><tr><td>maxOcc</td><td>unbounded</td></tr><tr><td>content</td><td>complex</td></tr></table>	isRef	0	minOcc	0	maxOcc	unbounded	content	complex										
isRef	0																		
minOcc	0																		
maxOcc	unbounded																		
content	complex																		
children	Data																		
attributes	<table><tr><td>Name</td><td>size</td></tr><tr><td>Type</td><td>xsd:integer</td></tr><tr><td>Use</td><td>required</td></tr><tr><td>Name</td><td>id</td></tr><tr><td>Type</td><td>xsd:string</td></tr><tr><td>Use</td><td>optional</td></tr><tr><td>Name</td><td>name</td></tr><tr><td>Type</td><td>xsd:string</td></tr><tr><td>Use</td><td>optional</td></tr></table>	Name	size	Type	xsd:integer	Use	required	Name	id	Type	xsd:string	Use	optional	Name	name	Type	xsd:string	Use	optional
Name	size																		
Type	xsd:integer																		
Use	required																		
Name	id																		
Type	xsd:string																		
Use	optional																		
Name	name																		
Type	xsd:string																		
Use	optional																		
source	<xsd:element name="Input" type="Input" minOccurs="0" maxOccurs="unbounded"/>																		
description	Single container of request parameters for control																		

element Function/OutputListSize

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="OutputListSize" type="xsd:string" minOccurs="0"/>
description	Number of Output and Outputs

element Function/OutputList

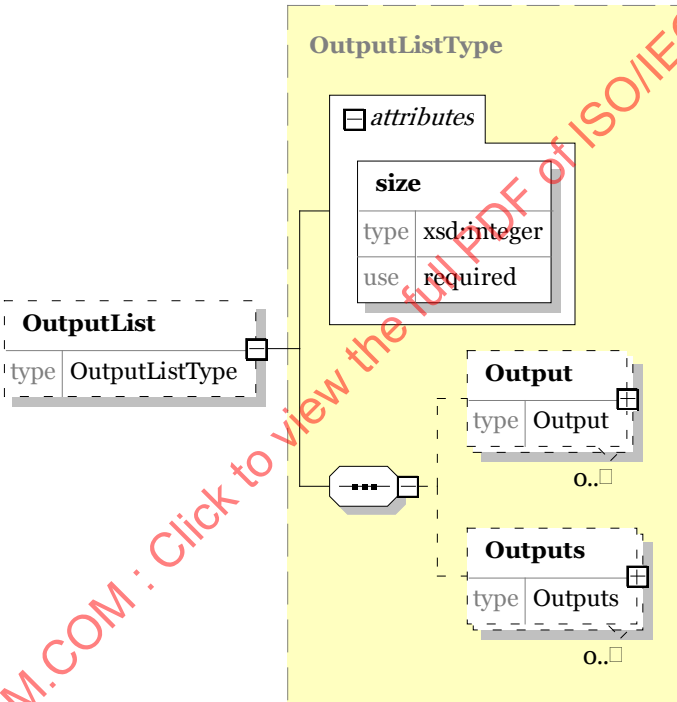diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	Output Outputs
attributes	Name size Type xsd:integer Use required
source	<xsd:element name="OutputList" type="OutputListType" minOccurs="0"/>
description	List of Output and Outputs

element OutputListType/Output

diagram	
properties	isRef 0 minOcc 0 maxOcc unbounded content complex
children	Data
attributes	Name size Type xsd:integer Use required Name id Type xsd:string Use optional Name name Type xsd:string Use optional
source	<xsd:element name="Output" type="Output" minOccurs="0" maxOccurs="unbounded"/>
description	Single container of response parameters for control response or event

element OutputListType/Outputs

diagram																			
properties	isRef 0 minOcc 0 maxOcc unbounded content complex																		
children	Output																		
attributes	<table> <tr> <td>Name</td><td>size</td></tr> <tr> <td>Type</td><td>xsd:integer</td></tr> <tr> <td>Use</td><td>required</td></tr> </table> <table> <tr> <td>Name</td><td>id</td></tr> <tr> <td>Type</td><td>xsd:string</td></tr> <tr> <td>Use</td><td>optional</td></tr> </table> <table> <tr> <td>Name</td><td>name</td></tr> <tr> <td>Type</td><td>xsd:string</td></tr> <tr> <td>Use</td><td>optional</td></tr> </table>	Name	size	Type	xsd:integer	Use	required	Name	id	Type	xsd:string	Use	optional	Name	name	Type	xsd:string	Use	optional
Name	size																		
Type	xsd:integer																		
Use	required																		
Name	id																		
Type	xsd:string																		
Use	optional																		
Name	name																		
Type	xsd:string																		
Use	optional																		
source	<xsd:element name="Outputs" type="Outputs" minOccurs="0" maxOccurs="unbounded"/>																		
description	Containers of response parameters for control response or event																		

element Outputs/Output

diagram	
properties	isRef 0 minOcc 0 maxOcc unbounded content complex
children	Data
attributes	Name size Type xsd:integer Use required Name id Type xsd:string Use optional Name name Type xsd:string Use optional
source	<xsd:element name="Output" type="Output" minOccurs="0" maxOccurs="unbounded"/>
description	Single container of response parameters for control response or event

element DeviceDescriptionType/StatusProperty

diagram	
properties	isRef 0 content complex
children	Status FunctionStatus DeviceStatus NetworkStatusList
source	<xsd:element name="StatusProperty" type="StatusPropertyType"/>
description	Status information of device

element StatusPropertyType/Status

diagram	
properties	isRef 0 content complex
facets	enumeration Online enumeration Offline enumeration Error
source	<xsd:element name="Status" type="StatusType"/>
description	Current status of a device such as Online, Offline or Error

element StatusPropertyType/FunctionStatus

diagram	
properties	isRef 0 minOcc 0 maxOcc unbounded content complex
children	Function
attributes	Name numoffunction Type xsd:integer
source	<pre><xsd:element name="FunctionStatus" minOccurs="0" maxOccurs="unbounded"> <xsd:complexType> <xsd:sequence> <xsd:element name="Function" type="FunctionStatusType"/> </xsd:sequence> <xsd:attribute name="numoffunction" type="xsd:integer"/> </xsd:complexType> </xsd:element></pre>
description	Current detail function status in case of Online status

attribute StatusPropertyType/FunctionStatus/@numoffunction

properties	isRef 0
source	<pre><xsd:attribute name="numoffunction" type="xsd:integer"/></pre>
description	Number of function

element StatusPropertyType/FunctionStatus/Function

diagram	
properties	isRef 0 content complex
children	FunctionID FunctionStatusValueList
used by	complexType FunctionListType
source	<xsd:element name="Function" type="FunctionStatusType"/>
description	Function status of a device

element StatusPropertyType/DeviceStatus

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	MPUStatusList MemoryStatusList StorageStatusList
source	<xsd:element name="DeviceStatus" type="DeviceStatusType" minOccurs="0"/>
description	Current device status of hardware

element StatusPropertyType/NetworkStatusList

diagram	<pre> classDiagram class NetworkStatusList { +numofinterface xsd:integer } class NetworkStatus { +NetworkStatusType } class NetworkStatusType { } NetworkStatusList "1" -- "*" NetworkStatus NetworkStatusType < -- NetworkStatus </pre>
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	NetworkStatus
attributes	Name numofinterface Type xsd:integer Use required
source	<pre> <xsd:element name="NetworkStatusList" minOccurs="0"> <xsd:complexType> <xsd:sequence> <xsd:element name="NetworkStatus" maxOccurs="unbounded"> <xsd:complexType> <xsd:complexContent> <xsd:extension base="NetworkStatusType"/> </xsd:complexContent> </xsd:complexType> </xsd:element> </xsd:sequence> <xsd:attribute name="numofinterface" type="xsd:integer" use="required"/> </xsd:complexType> </xsd:element> </pre>
description	Lists of current network status

attribute StatusPropertyType/NetworkStatusList/@numofinterface

properties	isRef 0 use required
source	<pre> <xsd:attribute name="numofinterface" type="xsd:integer" use="required"/> </pre>
description	Number of interface of single device

element StatusPropertyType/NetworkStatusList/NetworkStatus

diagram	The diagram illustrates the structure of the NetworkStatus element. It is a complex type that extends NetworkStatusType. The NetworkStatusType (extension) contains five child elements: InterfaceID (type: xsd:string), Connection (type: xsd:string, derivedBy: restriction), Traffic (type: xsd:string), ResponseTime (type: xsd:string, derivedBy: extension), and LossRate (type: xsd:string). The NetworkStatus element is shown as an extension of NetworkStatusType with a cardinality of 1..∞.
properties	isRef 0 minOcc 1 maxOcc unbounded content complex
children	InterfaceID ResponseTime LossRate Connection Traffic
source	<pre><xsd:element name="NetworkStatus" maxOccurs="unbounded"> <xsd:complexType> <xsd:complexContent> <xsd:extension base="NetworkStatusType"/> </xsd:complexContent> </xsd:complexType> </xsd:element></pre>
description	Current network status of single interface in case of Online status


simpleType StatusType

used by	element
facets	enumeration Online enumeration Offline enumeration Error
source	<pre><xsd:simpleType name="StatusType"> <xsd:restriction base="xsd:string"> <xsd:enumeration value="Online"/> <xsd:enumeration value="Offline"/> <xsd:enumeration value="Error"/> </xsd:restriction> </xsd:simpleType></pre>
description	Type of status

simpleType TimeUnitType

used by	attribute
facets	enumeration sec enumeration msec enumeration usec
source	<pre><xsd:simpleType name="TimeUnitType"> <xsd:restriction base="xsd:string"> <xsd:enumeration value="sec"/> <xsd:enumeration value="msec"/> <xsd:enumeration value="usec"/> </xsd:restriction> </xsd:simpleType></pre>
description	Type of response-time unit

element FunctionStatusType/FunctionID

diagram	
properties	isRef 0 content simple
source	<pre><xsd:element name="FunctionID" type="xsd:string"/></pre>
description	ID of a Function

element FunctionStatusType/SharableStatus

diagram	
properties	isRef 0 content simple
source	<pre><xsd:element name="SharableStatus" type="xsd:integer"/></pre>
description	Sharable status of a Function

element FunctionStatusType/FunctionStatusValueList

diagram	The diagram illustrates the structure of the FunctionStatusValueListType. It is a class with an attribute size of type xsd:integer and a required use. The class has two children: FunctionStatusValue (type FunctionStatusValue, 0..1 occurrence) and FunctionStatusValues (type FunctionStatusValues, 0..1 occurrence). A dashed box labeled FunctionStatusValueList contains the FunctionStatusValueListType class.
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	FunctionStatusValue FunctionStatusValues
attributes	Name size Type xsd:integer Use required
source	<xsd:element name="FunctionStatusValueList" type="FunctionStatusValueListType" minOccurs="0"/>
description	Lists of FunctionStatusValue

element FunctionStatusValueListType/FunctionStatusValue

diagram	The diagram illustrates the XSD structure of the FunctionStatusValue element. It is a complex type with the following attributes: size: type <code>xsd:integer</code>, use <code>required</code>. id: type <code>xsd:string</code>, use <code>optional</code>. name: type <code>xsd:string</code>, use <code>optional</code>. The element contains a child element FunctionStatusValueData of type <code>xsd:string</code>, which is an extension of the base type. The cardinality for the element is <code>0..1</code>.
properties	isRef 0 minOcc 0 maxOcc unbounded content complex
children	FunctionStatusValueData
attributes	Name size Type <code>xsd:integer</code> Use required Name id Type <code>xsd:string</code> Use optional Name name Type <code>xsd:string</code> Use optional
source	<pre><xsd:element name="FunctionStatusValue" type="FunctionStatusValue" minOccurs="0" maxOccurs="unbounded"/></pre>
description	Single value of a FunctionStatus

element FunctionStatusValueData

diagram											
properties	content complex										
used by	complexType										
attributes	<table> <tr> <td>Name</td><td>id</td></tr> <tr> <td>Type</td><td>xsd:string</td></tr> <tr> <td>Use</td><td>optional</td></tr> <tr> <td>Name</td><td>name</td></tr> <tr> <td>Type</td><td>xsd:string</td></tr> </table>	Name	id	Type	xsd:string	Use	optional	Name	name	Type	xsd:string
Name	id										
Type	xsd:string										
Use	optional										
Name	name										
Type	xsd:string										
source	<pre> <xsd:element name="FunctionStatusValueData"> <xsd:complexType> <xsd:simpleContent> <xsd:extension base="xsd:string"> <xsd:attribute name="id" type="xsd:string" use="optional"/> <xsd:attribute name="name" type="xsd:string"/> </xsd:extension> </xsd:simpleContent> </xsd:complexType> </xsd:element> </pre>										
description	Current value of FunctionStatusValue										

attribute FunctionStatusValueData/@id

properties	<table> <tr> <td>isRef</td><td>0</td></tr> <tr> <td>use</td><td>optional</td></tr> </table>	isRef	0	use	optional
isRef	0				
use	optional				
source	<xsd:attribute name="id" type="xsd:string" use="optional"/>				
description	ID of a FunctionStatusValueData				

attribute FunctionStatusValueData/@name

properties	<table> <tr> <td>isRef</td><td>0</td></tr> </table>	isRef	0
isRef	0		
source	<xsd:attribute name="name" type="xsd:string"/>		
description	Name of a FunctionStatusValueData		

element FunctionStatusValueListType/FunctionStatusValues

diagram	
properties	isRef 0 minOcc 0 maxOcc unbounded content complex
children	FunctionStatusValue
attributes	Name size Type xsd:integer Use required Name id Type xsd:string Use optional Name name Type xsd:string Use optional
source	<pre><xsd:element name="FunctionStatusValues" type="FunctionStatusValues" minOccurs="0" maxOccurs="unbounded"/></pre>
description	Several values of FunctionStatus

element FunctionStatusValues/FunctionStatusValue

diagram																			
properties	isRef 0 minOcc 0 maxOcc unbounded content complex																		
children	FunctionStatusValueData																		
attributes	<table> <tr> <td>Name</td><td>size</td></tr> <tr> <td>Type</td><td>xsd:integer</td></tr> <tr> <td>Use</td><td>required</td></tr> </table> <table> <tr> <td>Name</td><td>id</td></tr> <tr> <td>Type</td><td>xsd:string</td></tr> <tr> <td>Use</td><td>optional</td></tr> </table> <table> <tr> <td>Name</td><td>name</td></tr> <tr> <td>Type</td><td>xsd:string</td></tr> <tr> <td>Use</td><td>optional</td></tr> </table>	Name	size	Type	xsd:integer	Use	required	Name	id	Type	xsd:string	Use	optional	Name	name	Type	xsd:string	Use	optional
Name	size																		
Type	xsd:integer																		
Use	required																		
Name	id																		
Type	xsd:string																		
Use	optional																		
Name	name																		
Type	xsd:string																		
Use	optional																		
source	<xsd:element name="FunctionStatusValue" type="FunctionStatusValue" minOccurs="0" maxOccurs="unbounded"/>																		
description	Single value of a FunctionStatus																		

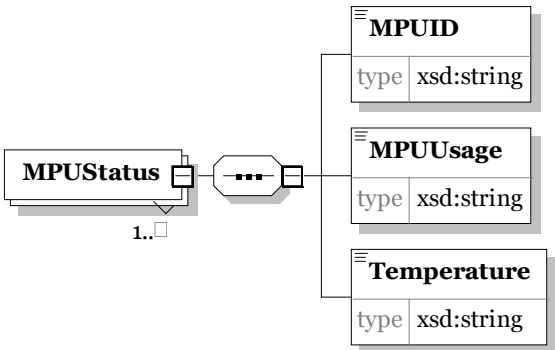
element DeviceStatusType/MPUStatusList

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	MPUStatus
attributes	Name numofMPU Type xsd:integer Use required
source	<pre> <xsd:element name="MPUStatusList" minOccurs="0"> <xsd:complexType> <xsd:sequence> <xsd:element name="MPUStatus" maxOccurs="unbounded"> <xsd:complexType> <xsd:sequence> <xsd:element name="MPUID" type="xsd:string"/> <xsd:element name="MPUUsage" type="xsd:string"/> <xsd:element name="Temperature" type="xsd:string"/> </xsd:sequence> </xsd:complexType> </xsd:element> </xsd:sequence> <xsd:attribute name="numofMPU" type="xsd:integer" use="required"/> </xsd:complexType> </xsd:element> </pre>
description	MPU status lists of device


attribute DeviceStatusType/MPUStatusList/@numofMPU

properties	isRef 0 use required
source	<pre> <xsd:attribute name="numofMPU" type="xsd:integer" use="required"/> </pre>
description	Number of MPU of device


element DeviceStatusType/MPUStatusList/MPUStatus

diagram	 The diagram shows the MPUStatus element as a container for three child elements: MPUID, MPUUsage, and Temperature. Each child element is represented by a box with its name and a 'type' attribute set to 'xsd:string'. The MPUStatus element itself is shown with a cardinality of '1..□' (one to unbounded).
properties	isRef 0 minOcc 1 maxOcc unbounded content complex
children	MPUID MPUUsage Temperature
source	<pre><xsd:element name="MPUStatus" maxOccurs="unbounded"> <xsd:complexType> <xsd:sequence> <xsd:element name="MPUID" type="xsd:string"/> <xsd:element name="MPUUsage" type="xsd:string"/> <xsd:element name="Temperature" type="xsd:string"/> </xsd:sequence> </xsd:complexType> </xsd:element></pre>
description	MPU status of device


element DeviceStatusType/MPUStatusList/MPUStatus/MPUID

diagram	 The diagram shows the MPUID element as a simple container with a 'type' attribute set to 'xsd:string'.
properties	isRef 0 content simple
source	<pre><xsd:element name="MPUID" type="xsd:string"/></pre>
description	MPU ID of device


element DeviceStatusType/MPUStatusList/MPUStatus/MPUUsage

diagram	 The diagram shows the MPUUsage element as a simple container with a 'type' attribute set to 'xsd:string'.
properties	isRef 0 content simple
source	<pre><xsd:element name="MPUUsage" type="xsd:string"/></pre>
description	MPU usage of device

element DeviceStatusType/MPUStatusList/MPUStatus/Temperature

diagram	
properties	isRef 0 content simple
source	<xsd:element name="Temperature" type="xsd:string"/>
description	MPU temperature of device

element DeviceStatusType/MemoryStatusList

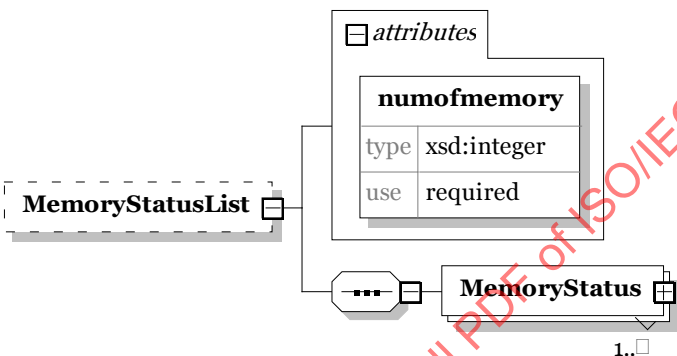diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	MemoryStatus
attributes	Name numofmemory Type xsd:integer Use required
source	<pre> <xsd:element name="MemoryStatusList" minOccurs="0"> <xsd:complexType> <xsd:sequence> <xsd:element name="MemoryStatus" maxOccurs="unbounded"> <xsd:complexType> <xsd:sequence> <xsd:element name="MemoryID" type="xsd:string"/> <xsd:element name="TotalMemSize" type="xsd:string"/> <xsd:element name="MemUsage" type="xsd:string"/> </xsd:sequence> </xsd:complexType> </xsd:element> </xsd:sequence> <xsd:attribute name="numofmemory" type="xsd:integer" use="required"/> </xsd:complexType> </xsd:element> </pre>
description	Memory status lists of device

attribute DeviceStatusType/MemoryStatusList/@numofmemory

properties	isRef 0 use required
source	<xsd:attribute name="numofmemory" type="xsd:integer" use="required"/>
description	Number of memory

element DeviceStatusType/MemoryStatusList/MemoryStatus

diagram	
properties	isRef 0 minOcc 1 maxOcc unbounded content complex
children	MemoryID TotalMemSize MemUsage
source	<pre> <xsd:element name="MemoryStatus" maxOccurs="unbounded"> <xsd:complexType> <xsd:sequence> <xsd:element name="MemoryID" type="xsd:string"/> <xsd:element name="TotalMemSize" type="xsd:string"/> <xsd:element name="MemUsage" type="xsd:string"/> </xsd:sequence> </xsd:complexType> </xsd:element> </pre>
description	Status of memory


element DeviceStatusType/MemoryStatusList/MemoryStatus/MemoryID

diagram	
properties	isRef 0 content simple
source	<xsd:element name="MemoryID" type="xsd:string"/>
description	ID of memory

element DeviceStatusType/MemoryStatusList/MemoryStatus/TotalMemSize

diagram	
properties	isRef 0 content simple
source	<xsd:element name="TotalMemSize" type="xsd:string"/>
description	Total size of memory

element DeviceStatusType/MemoryStatusList/MemoryStatus/MemUsage

diagram	
properties	isRef 0 content simple
source	<xsd:element name="MemUsage" type="xsd:string"/>
description	Using size of memory

IECNORM.COM : Click to view the full PDF of ISO/IEC 30100-2:2016

element DeviceStatusType/StorageStatusList

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	StorageStatus
attributes	Name numofstorage Type xsd:integer Use required
source	<pre> <xsd:element name="StorageStatusList" minOccurs="0"> <xsd:complexType> <xsd:sequence> <xsd:element name="StorageStatus" maxOccurs="unbounded"> <xsd:complexType> <xsd:sequence> <xsd:element name="StorageID" type="xsd:string"/> <xsd:element name="TotalStorageSize" type="xsd:string"/> <xsd:element name="StorageUsage" type="xsd:string"/> </xsd:sequence> </xsd:complexType> </xsd:element> </xsd:sequence> <xsd:attribute name="numofstorage" type="xsd:integer" use="required"/> </xsd:complexType> </xsd:element> </pre>
description	Storage status lists of a device

attribute DeviceStatusType/StorageStatusList/@numofstorage

properties	isRef 0 use required
source	<pre> <xsd:attribute name="numofstorage" type="xsd:integer" use="required"/> </pre>
description	Number of storage

element DeviceStatusType/StorageStatusList/StorageStatus

diagram	
properties	isRef 0 minOcc 1 maxOcc unbounded content complex
children	StorageID TotalStorageSize StorageUsage
source	<pre> <xsd:element name="StorageStatus" maxOccurs="unbounded"> <xsd:complexType> <xsd:sequence> <xsd:element name="StorageID" type="xsd:string"/> <xsd:element name="TotalStorageSize" type="xsd:string"/> <xsd:element name="StorageUsage" type="xsd:string"/> </xsd:sequence> </xsd:complexType> </xsd:element> </pre>
description	Storage status of a device

element DeviceStatusType/StorageStatusList/StorageStatus/StorageID

diagram	
properties	isRef 0 content simple
source	<pre> <xsd:element name="StorageID" type="xsd:string"/> </pre>
description	ID of a storage

element DeviceStatusType/StorageStatusList/StorageStatus/TotalStorageSize

diagram	
properties	isRef 0 content simple
source	<pre> <xsd:element name="TotalStorageSize" type="xsd:string"/> </pre>
description	Total size of a storage

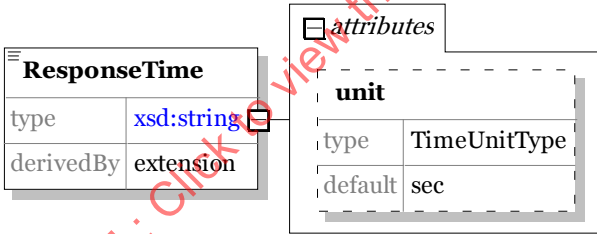
element DeviceStatusType/StorageStatusList/StorageStatus/StorageUsage

diagram	
properties	isRef 0 content simple
source	<xsd:element name="StorageUsage" type="xsd:string"/>
description	Using size of a storage

element NetworkStatusType/InterfaceID

diagram	
properties	isRef 0 content simple
source	<xsd:element name="InterfaceID" type="xsd:string"/>
description	One's own interface ID


element NetworkStatusType/ResponseTime

diagram							
properties	isRef 0 content simple						
attributes	<table> <tr><td>Name</td><td>unit</td></tr> <tr><td>Type</td><td>TimeUnitType</td></tr> <tr><td>Use</td><td>sec</td></tr> </table>	Name	unit	Type	TimeUnitType	Use	sec
Name	unit						
Type	TimeUnitType						
Use	sec						
source	<pre> <xsd:element name="ResponseTime"> <xsd:complexType> <xsd:simpleContent> <xsd:extension base="xsd:string"> <xsd:attribute name="unit" type="TimeUnitType" default="sec"/> </xsd:extension> </xsd:simpleContent> </xsd:complexType> </xsd:element> </pre>						
description	Current response time of single interface						

attribute NetworkStatusType/ResponseTime/@unit

properties	isRef 0 default sec
facets	enumeration sec enumeration msec enumeration usec
source	<xsd:attribute name="unit" type="TimeUnitType" default="sec"/>
description	Unit of response time

element NetworkStatusType/LossRate

diagram	
properties	isRef 0 content simple
source	<xsd:element name="LossRate" type="xsd:string"/>
description	Current loss rate of single interface

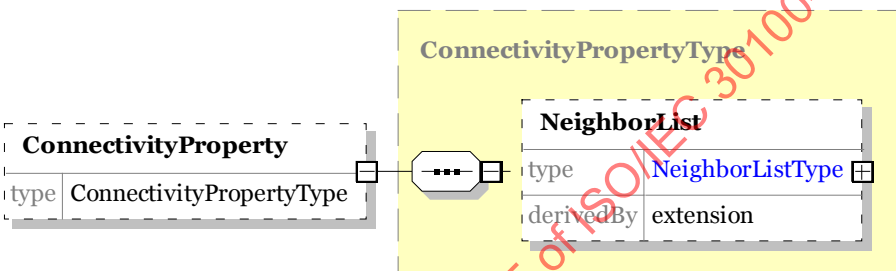
element NetworkStatusType/Connection

diagram	
properties	isRef 0 content simple
facets	enumeration Online enumeration Offline
source	<pre> <xsd:element name="Connection"> <xsd:simpleType> <xsd:restriction base="xsd:string"> <xsd:enumeration value="Online"/> <xsd:enumeration value="Offline"/> </xsd:restriction> </xsd:simpleType> </xsd:element> </pre>
description	Current connection status, online or offline of single interface


element NetworkStatusType/Traffic

diagram	
properties	isRef 0 content simple
source	<xsd:element name="Traffic" type="xsd:string"/>
description	Current network traffic(kbps) of single interface

element DeviceDescriptionType/ConnectivityProperty

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	NeighborList
source	<xsd:element name="ConnectivityProperty" type="ConnectivityPropertyType" minOccurs="0"/>
description	Connection information of device


element NeighborListType/DeviceID

diagram	
properties	isRef 0 content simple
source	<xsd:element name="DeviceID" type="xsd:string"/>
description	One's own deviceID


element NeighborListType/NeighborInfo

diagram	The diagram shows the structure of the NeighborInfo element. It is a complex type containing three elements: NetworkType (type NetworkTypeType, 0..1), InterfaceID (type xsd:string, 0..1), and NodeInfo (type NeighborListType, 0..1). The NodeInfo element is derived by extension from NeighborListType.
properties	isRef 0 minOcc 0 maxOcc unbounded content complex
children	NetworkType InterfaceID NodeInfo
source	<pre> <xsd:element name="NeighborInfo" minOccurs="0" maxOccurs="unbounded"> <xsd:complexType> <xsd:sequence> <xsd:element name="NetworkType" type="NetworkTypeType" minOccurs="0" maxOccurs="unbounded"/> <xsd:element name="InterfaceID" type="xsd:string" minOccurs="0" maxOccurs="unbounded"/> <xsd:element name="NodeInfo" minOccurs="0" maxOccurs="unbounded"> <xsd:complexType> <xsd:complexContent> <xsd:extension base="NeighborListType"> <xsd:attribute name="NumOfNeighbor" type="xsd:integer" use="required"/> </xsd:extension> </xsd:complexContent> </xsd:complexType> </xsd:element> </xsd:sequence> </xsd:complexType> </xsd:element> </pre>
description	Neighbor information of the device

element NeighborListType/NeighborInfo/NetworkType

diagram	
properties	isRef 0 minOcc 0 maxOcc unbounded content simple
facets	enumeration ethernet enumeration ieee1394 enumeration Wibeem enumeration echonet enumeration uwb enumeration usb enumeration plc enumeration 802.11 enumeration bluetooth enumeration zigbee enumeration rfid enumeration rs485 enumeration rs232 enumeration unknown
source	<xsd:element name="NetworkType" type="NetworkTypeType" minOccurs="0" maxOccurs="unbounded"/>
description	Network type of a neighbor device

element NeighborListType/NeighborInfo/InterfaceID

diagram	
properties	isRef 0 minOcc 0 maxOcc unbounded content simple
source	<xsd:element name="InterfaceID" type="xsd:string" minOccurs="0" maxOccurs="unbounded"/>
description	Interface ID of a neighbor device

element NeighborListType/NeighborInfo/NodeInfo

diagram	The diagram illustrates the XSD structure of the NodeInfo element. It is a complex type derived by extension from NeighborListType. The NodeInfo element contains a sequence of two elements: DeviceID (type <code>xsd:string</code>) and NeighborInfo (type <code>NeighborListType</code>, with <code>minOccurs=0</code> and <code>maxOccurs=unbounded</code>). Additionally, NodeInfo has an attribute NumOfNeighbor (type <code>xsd:integer</code>, use <code>required</code>).
properties	isRef 0 minOcc 0 maxOcc unbounded content complex
children	DeviceID NeighborInfo
attributes	Name NumOfNeighbor Type xsd:integer Use required
source	<pre><xsd:element name="NodeInfo" minOccurs="0" maxOccurs="unbounded"> <xsd:complexType> <xsd:complexContent> <xsd:extension base="NeighborListType"> <xsd:attribute name="NumOfNeighbor" type="xsd:integer" use="required"/> </xsd:extension> </xsd:complexContent> </xsd:complexType> </xsd:element></pre>
description	Single neighbor-node information


attribute NeighborListType/NeighborInfo/NodeInfo/@NumOfNeighbor

properties	isRef 0 use required
source	<code><xsd:attribute name="NumOfNeighbor" type="xsd:integer" use="required"/></code>
description	Number of neighbor devices

element DeviceDescriptionType/AdditionalProperty


diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	HardwareInfo SoftwareListInfo DeviceSpecificInfo Description
source	<xsd:element name="AdditionalProperty" type="AdditionalPropertyType" minOccurs="0"/>
description	It presents unclassified properties and undefined properties.

element AdditionalPropertyType/HardwareInfo

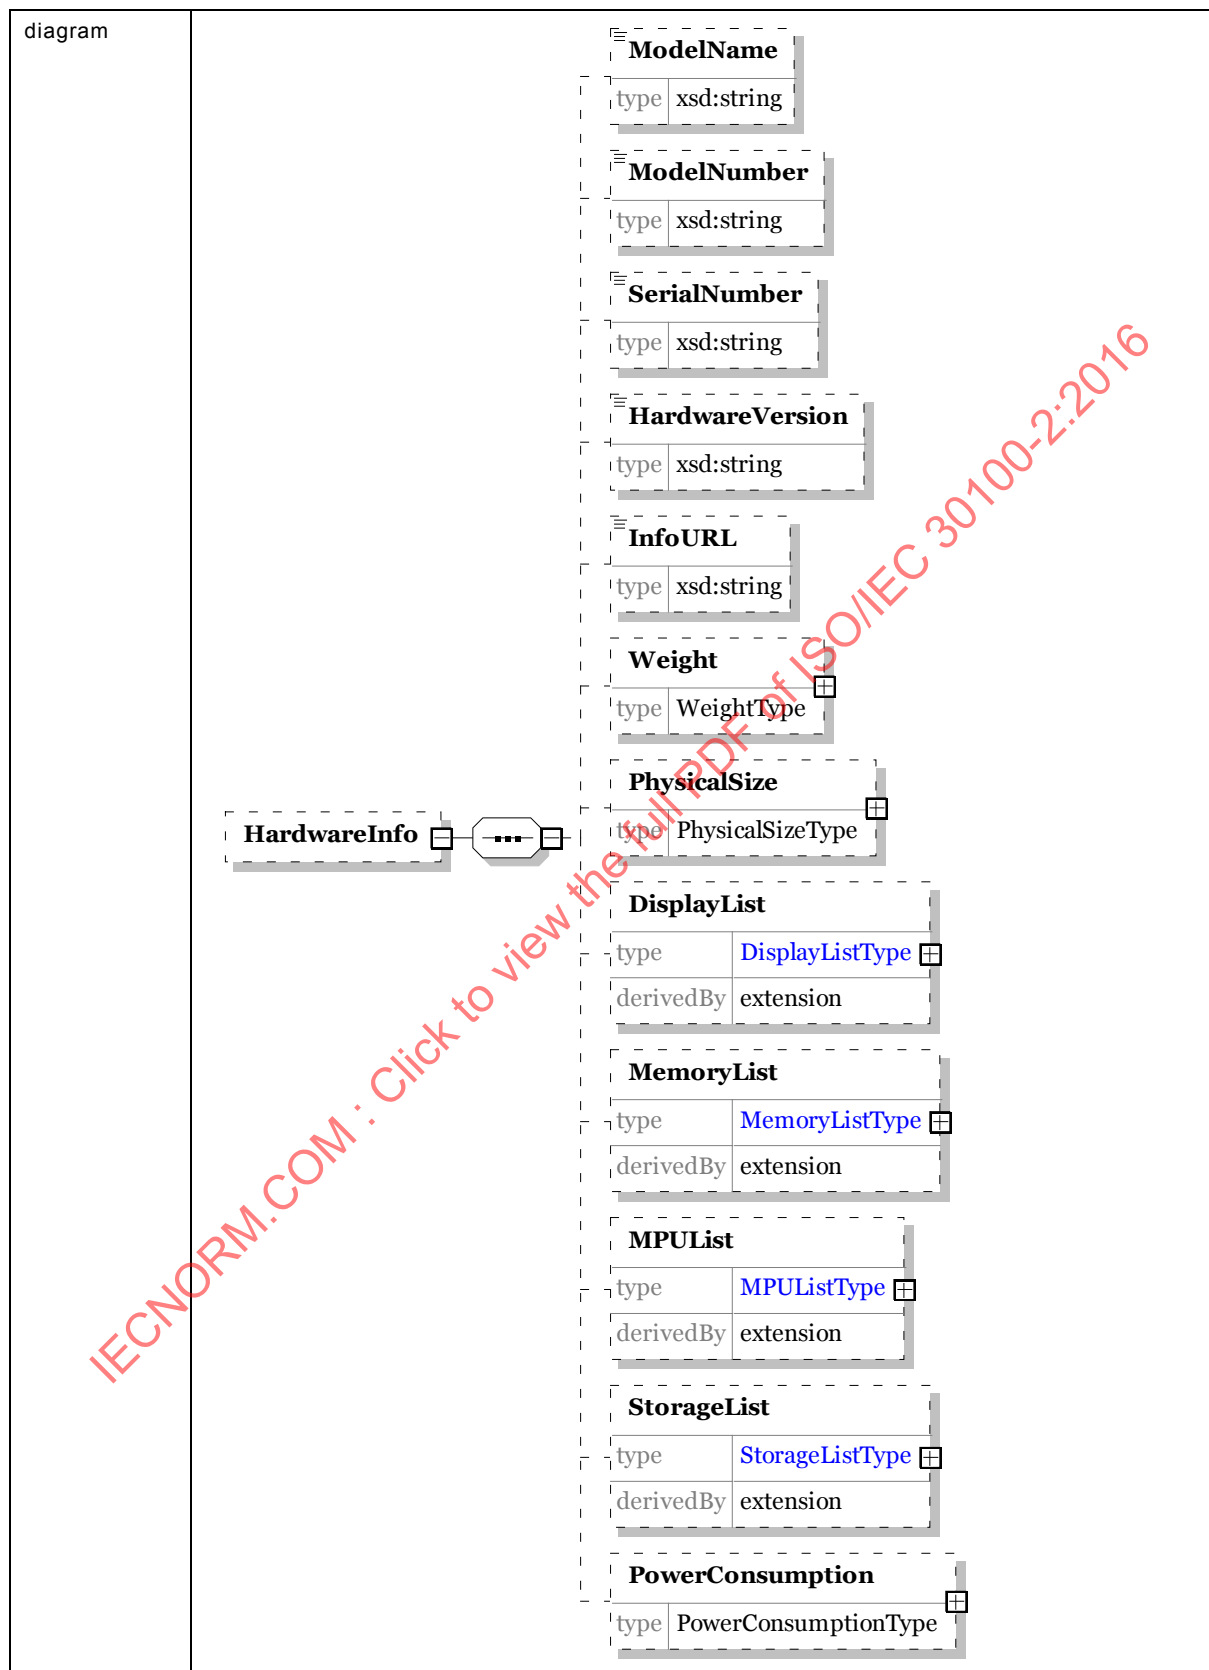


properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	ModelName ModelNumber SerialNumber HardwareVersion InfoURL Weight PhysicalSize DisplayList MemoryList MPUList StorageList PowerConsumption
source	<pre> <xsd:element name="HardwareInfo" minOccurs="0"> <xsd:complexType> <xsd:sequence> <xsd:element name="ModelName" type="xsd:string" minOccurs="0"/> <xsd:element name="ModelNumber" type="xsd:string" minOccurs="0"/> <xsd:element name="SerialNumber" type="xsd:string" minOccurs="0"/> <xsd:element name="HardwareVersion" type="xsd:string" minOccurs="0"/> <xsd:element name="InfoURL" type="xsd:string" minOccurs="0"/> <xsd:element name="Weight" type="WeightType" minOccurs="0"/> <xsd:element name="PhysicalSize" type="PhysicalSizeType" minOccurs="0"/> <xsd:element name="DisplayList" minOccurs="0"> <xsd:complexType> <xsd:complexContent> <xsd:extension base="DisplayListType"> <xsd:attribute name="numofdisplay" type="xsd:integer" use="required"/> </xsd:extension> </xsd:complexContent> </xsd:complexType> </xsd:element> <xsd:element name="MemoryList" minOccurs="0"> <xsd:complexType> <xsd:complexContent> <xsd:extension base="MemoryListType"> <xsd:attribute name="numofmemory" type="xsd:integer" use="required"/> </xsd:extension> </xsd:complexContent> </xsd:complexType> </xsd:element> <xsd:element name="MPUList" minOccurs="0"> <xsd:complexType> <xsd:complexContent> <xsd:extension base="MPUListType"> <xsd:attribute name="numofMPU" type="xsd:integer" use="required"/> </xsd:extension> </xsd:complexContent> </xsd:complexType> </xsd:element> <xsd:element name="StorageList" minOccurs="0"> <xsd:complexType> <xsd:complexContent> <xsd:extension base="StorageListType"> <xsd:attribute name="numofstorage" type="xsd:integer" use="required"/> </xsd:extension> </xsd:complexContent> </xsd:complexType> </xsd:element> <xsd:element name="PowerConsumption" type="PowerConsumptionType" minOccurs="0"/> </xsd:sequence> </xsd:complexType> </xsd:element> </pre>
description	Hardware specification of device


element AdditionalPropertyType/HardwareInfo/ModelName

diagram	 <pre> classDiagram class ModelName { type xsd:string } </pre>
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="ModelName" type="xsd:string" minOccurs="0"/>
description	Model name of device

element AdditionalPropertyType/HardwareInfo/ModelNumber

diagram	 <pre> classDiagram class ModelNumber { type xsd:string } </pre>
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="ModelNumber" type="xsd:string" minOccurs="0"/>
description	Model number of device

element AdditionalPropertyType/HardwareInfo/SerialNumber

diagram	 <pre> classDiagram class SerialNumber { type xsd:string } </pre>
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="SerialNumber" type="xsd:string" minOccurs="0"/>
description	Serial number of device

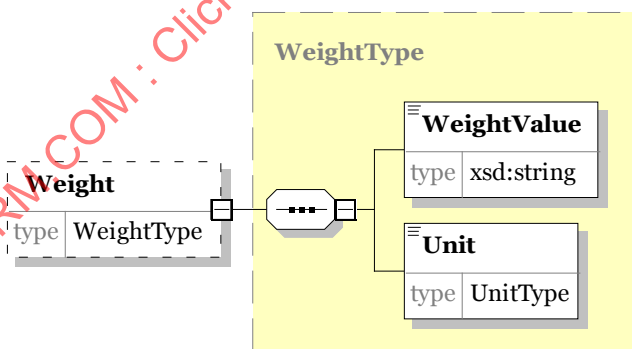
element AdditionalPropertyType/HardwareInfo/HardwareVersion

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="HardwareVersion" type="xsd:string" minOccurs="0"/>
description	Hardware version of device


element AdditionalPropertyType/HardwareInfo/InfoURL

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="InfoURL" type="xsd:string" minOccurs="0"/>
description	URL of device information


element AdditionalPropertyType/HardwareInfo/Weight

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	WeightValue Unit
source	<xsd:element name="Weight" type="WeightType" minOccurs="0"/>
description	Weight information of device

element WeightType/WeightValue

diagram	
properties	isRef 0 content simple
source	<xsd:element name="WeightValue" type="xsd:string"/>
description	Value of weight

element WeightType/Unit

diagram	
properties	isRef 0 content simple
source	<xsd:element name="Unit" type="UnitType"/>
description	Unit of weight

simpleType UnitType

used by	elements WeightType/Unit PhysicalSizeType/Unit PowerConsumptionType/Unit attribute Data/@valueunit
source	<xsd:simpleType name="UnitType"> <xsd:restriction base="xsd:hexBinary"/> </xsd:simpleType>
description	User-defined unit

element AdditionalPropertyType/HardwareInfo/PhysicalSize

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	SizeValue Unit
source	<xsd:element name="PhysicalSize" type="PhysicalSizeType" minOccurs="0"/>
description	Physical size information of device

element PhysicalSizeType/SizeValue

diagram	
properties	isRef 0 content simple
source	<xsd:element name="SizeValue" type="xsd:string"/>
description	Value of physical size

element PhysicalSizeType/Unit

diagram	
properties	isRef 0 content simple
source	<xsd:element name="Unit" type="UnitType"/>
description	Unit of physical size

element AdditionalPropertyType/HardwareInfo/DisplayList

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	Display
attributes	Name numofdisplay Type xsd:integer Use required
source	<pre> <xsd:element name="DisplayList" minOccurs="0"> <xsd:complexType> <xsd:complexContent> <xsd:extension base="DisplayListType"> <xsd:attribute name="numofdisplay" type="xsd:integer" use="required"/> </xsd:extension> </xsd:complexContent> </xsd:complexType> </xsd:element> </pre>
description	Lists of display

attribute AdditionalPropertyType/HardwareInfo/DisplayList/@numofdisplay

properties	isRef 0 use required
source	<pre> <xsd:attribute name="numofdisplay" type="xsd:integer" use="required"/> </pre>
description	Number of displays


element DisplayListType/Display

diagram	
properties	isRef 0 minOcc 1 maxOcc unbounded content complex
children	DisplayID Resolution DisplaySize PannelType
source	<pre> <xsd:element name="Display" maxOccurs="unbounded"> <xsd:complexType> <xsd:sequence> <xsd:element name="DisplayID" type="xsd:string"/> <xsd:element name="Resolution" type="xsd:string"/> <xsd:element name="DisplaySize" type="xsd:string"/> <xsd:element name="PannelType" type="xsd:string"/> </xsd:sequence> </xsd:complexType> </xsd:element> </pre>
description	Display information of device


element DisplayListType/Display/DisplayID

diagram	
properties	isRef 0 content simple
source	<pre> <xsd:element name="DisplayID" type="xsd:string"/> </pre>
description	ID of display


element DisplayListType/Display/Resolution

diagram	
properties	isRef 0 content simple
source	<xsd:element name="Resolution" type="xsd:string"/>
description	Resolution of display

element DisplayListType/Display/DisplaySize

diagram	
properties	isRef 0 content simple
source	<xsd:element name="DisplaySize" type="xsd:string"/>
description	Size of display

element DisplayListType/Display/PannelType

diagram	
properties	isRef 0 content simple
source	<xsd:element name="PannelType" type="xsd:string"/>
description	Panel type of display

element AdditionalPropertyType/HardwareInfo/MemoryList

diagram	The diagram illustrates the structure of the MemoryList element. It is a complex type that extends MemoryListType. The extension is shown with a dashed box around MemoryList and a solid box around MemoryListType. The MemoryList type has a type of MemoryListType and is derivedBy extension. The MemoryListType contains a sequence of Memory elements (indicated by three dots and a box) and an attribute numofmemory of type xsd:integer with required use.
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	Memory
attributes	Name numofmemory Type xsd:integer Use required
source	<pre><xsd:element name="MemoryList" minOccurs="0"> <xsd:complexType> <xsd:complexContent> <xsd:extension base="MemoryListType"> <xsd:attribute name="numofmemory" type="xsd:integer" use="required"/> </xsd:extension> </xsd:complexContent> </xsd:complexType> </xsd:element></pre>
description	Lists of memory

attribute AdditionalPropertyType/HardwareInfo/MemoryList/@numofmemory

properties	isRef 0 use required
source	<pre><xsd:attribute name="numofmemory" type="xsd:integer" use="required"/></pre>
description	Number of memories

element MemoryListType/Memory

diagram	
properties	isRef 0 minOcc 1 maxOcc unbounded content complex
children	MemoryID MemoryDescription
source	<pre><xsd:element name="Memory" maxOccurs="unbounded"> <xsd:complexType> <xsd:sequence> <xsd:element name="MemoryID" type="xsd:string"/> <xsd:element name="MemoryDescription" type="xsd:string"/> </xsd:sequence> </xsd:complexType> </xsd:element></pre>
description	Memory information of device

element MemoryListType/Memory/MemoryID

diagram	
properties	isRef 0 content simple
source	<pre><xsd:element name="MemoryID" type="xsd:string"/></pre>
description	ID of memory

element MemoryListType/Memory/MemoryDescription

diagram	
properties	isRef 0 content simple
source	<pre><xsd:element name="MemoryDescription" type="xsd:string"/></pre>
description	Description of memory

element AdditionalPropertyType/HardwareInfo/MPUList

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	MPU
attributes	Name numofMPU Type xsd:integer Use required
source	<pre> <xsd:element name="MPUList" minOccurs="0"> <xsd:complexType> <xsd:complexContent> <xsd:extension base="MPUListType"> <xsd:attribute name="numofMPU" type="xsd:integer" use="required"/> </xsd:extension> </xsd:complexContent> </xsd:complexType> </xsd:element> </pre>
description	Lists of MPU

attribute AdditionalPropertyType/HardwareInfo/MPUList/@numofMPU

properties	isRef 0 use required
source	<pre> <xsd:attribute name="numofMPU" type="xsd:integer" use="required"/> </pre>
description	Number of MPUs

element MPUListType/MPU

diagram	
properties	isRef 0 minOcc 1 maxOcc unbounded content complex
children	MPUID MPUDescription
source	<pre><xsd:element name="MPU" maxOccurs="unbounded"> <xsd:complexType> <xsd:sequence> <xsd:element name="MPUID" type="xsd:string"/> <xsd:element name="MPUDescription" type="xsd:string"/> </xsd:sequence> </xsd:complexType> </xsd:element></pre>
description	MPU information of device

element MPUListType/MPU/MPUID

diagram	
properties	isRef 0 content simple
source	<pre><xsd:element name="MPUID" type="xsd:string"/></pre>
description	ID of MPU

element MPUListType/MPU/MPUDescription

diagram	
properties	isRef 0 content simple
source	<pre><xsd:element name="MPUDescription" type="xsd:string"/></pre>
description	Description of MPU

element AdditionalPropertyType/HardwareInfo/StorageList

diagram	The diagram illustrates the structure of the StorageList element. It is a complex type derived from StorageListType via extension. The StorageListType is shown as a sequence of Storage elements, indicated by a dashed box and a sequence notation (three dots in a box). The Storage element is shown as a box with a cardinality of 1..1. An attribute numofstorage is associated with the StorageListType, with a type of xsd:integer and a use of required.
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	Storage
attributes	Name numofstorage Type xsd:integer Use required
source	<pre><xsd:element name="StorageList" minOccurs="0"> <xsd:complexType> <xsd:complexContent> <xsd:extension base="StorageListType"> <xsd:attribute name="numofstorage" type="xsd:integer" use="required"/> </xsd:extension> </xsd:complexContent> </xsd:complexType> </xsd:element></pre>
description	Lists of storage

attribute AdditionalPropertyType/HardwareInfo/StorageList/@numofstorage

properties	isRef 0 use required
source	<xsd:attribute name="numofstorage" type="xsd:integer" use="required"/>
description	Number of storages

element StorageListType/Storage

diagram	
properties	isRef 0 minOcc 1 maxOcc unbounded content complex
children	StorageID StorageDescription
source	<pre><xsd:element name="Storage" maxOccurs="unbounded"> <xsd:complexType> <xsd:sequence> <xsd:element name="StorageID" type="xsd:string"/> <xsd:element name="StorageDescription" type="xsd:string"/> </xsd:sequence> </xsd:complexType> </xsd:element></pre>
description	Storage information of device

element StorageListType/Storage/StorageID

diagram	
properties	isRef 0 content simple
source	<pre><xsd:element name="StorageID" type="xsd:string"/></pre>
description	ID of storage

element StorageListType/Storage/StorageDescription

diagram	
properties	isRef 0 content simple
source	<pre><xsd:element name="StorageDescription" type="xsd:string"/></pre>
description	Description of storage

element AdditionalPropertyType/HardwareInfo/PowerConsumption

diagram	
properties	isRef 0 minOcc 1 maxOcc unbounded content complex
children	ConsumptionValue Unit
source	<xsd:element name="PowerConsumption" type="PowerConsumptionType" minOccurs="0"/>
description	Power consumption Information of device

element PowerConsumptionType/ConsumptionValue

diagram	
properties	isRef 0 content simple
source	<xsd:element name="ConsumptionValue" type="xsd:string"/>
description	Value of power consumption

element PowerConsumptionType/Unit

diagram	
properties	isRef 0 content simple
source	<xsd:element name="Unit" type="UnitType"/>
description	Unit of power consumption

element AdditionalPropertyType/SoftwareListInfo

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	Software
attributes	Name numofsoftware Type xsd:integer Use required
source	<pre> <xsd:element name="SoftwareListInfo" minOccurs="0"> <xsd:complexType> <xsd:sequence> <xsd:element name="Software" maxOccurs="unbounded"> <xsd:complexType> <xsd:sequence> <xsd:element name="Version"/> <xsd:element name="FileName"/> <xsd:element name="DownloadPath"/> <xsd:element name="FileURL"/> <xsd:element name="Type" minOccurs="0"/> </xsd:sequence> </xsd:complexType> </xsd:element> </xsd:sequence> <xsd:attribute name="numofsoftware" type="xsd:integer" use="required"/> </xsd:complexType> </xsd:element> </pre>
description	Lists of software

attribute AdditionalPropertyType/SoftwareListInfo/@numofsoftware

properties	isRef 0 use required
source	<pre> <xsd:attribute name="numofsoftware" type="xsd:integer" use="required"/> </pre>
description	Number of softwares

element AdditionalPropertyType/SoftwareListInfo/Software

diagram	
properties	isRef 0 minOcc 1 maxOcc unbounded content complex
children	Version FileName DownloadPath FileURL Type
source	<pre> <xsd:element name="Software" maxOccurs="unbounded"> <xsd:complexType> <xsd:sequence> <xsd:element name="Version"/> <xsd:element name="FileName"/> <xsd:element name="DownloadPath"/> <xsd:element name="FileURL"/> <xsd:element name="Type" minOccurs="0"/> </xsd:sequence> </xsd:complexType> </xsd:element> </pre>
description	Software information of device. Software includes firmware, embedded software and application.

element AdditionalPropertyType/SoftwareListInfo/Software/Version

diagram	
properties	isRef 0
source	<xsd:element name="Version"/>
description	Version of software

element AdditionalPropertyType/SoftwareListInfo/Software/FileName

diagram	
properties	isRef 0
source	<xsd:element name="FileName"/>
description	File name of software

element AdditionalPropertyType/SoftwareListInfo/Software/DownloadPath

diagram	
properties	isRef 0
source	<xsd:element name="DownloadPath"/>
description	Download path of software

element AdditionalPropertyType/SoftwareListInfo/Software/FileURL

diagram	
properties	isRef 0
source	<xsd:element name="FileURL"/>
description	File URL of software

element AdditionalPropertyType/SoftwareListInfo/Software/Type

diagram	
properties	isRef 0 minOcc 0 maxOcc 1
source	<xsd:element name="Type" minOccurs="0"/>
description	Type of software

element AdditionalPropertyType/DeviceSpecificInfo

diagram	The diagram illustrates the structure of the DeviceSpecificInfo element. It is a complex type that contains a reference to the PropertyListType. The PropertyListType is shown as a yellow box containing an attribute numofproperty of type xsd:integer and a sequence of Property elements. The DeviceSpecificInfo is shown as a dashed box with a reference to PropertyListType. The Property element is shown as a box with a sequence of elements.
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	Property
attributes	Name numofproperty Type xsd:integer Use required
source	<xsd:element name="DeviceSpecificInfo" type="PropertyListType" minOccurs="0"/>
description	User-defined properties for device specific information


element Property

diagram	The diagram illustrates the structure of the Property element. It is a complex type that contains two attributes: Name and Value, both of type xsd:string. The Property element is shown as a box with a sequence of elements.
properties	content complex
children	Name Value
used by	complexType PropertyListType
source	<xsd:element name="Property"> <xsd:complexType> <xsd:sequence> <xsd:element name="Name" type="xsd:string" minOccurs="0"/> <xsd:element name="Value" type="xsd:string" minOccurs="0"/> </xsd:sequence> </xsd:complexType> </xsd:element>
description	User-defined property


element Property/Name

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="Name" type="xsd:string" minOccurs="0"/>
description	Name of property

element Property/Value


diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="Value" type="xsd:string" minOccurs="0"/>
description	Value of property

element AdditionalPropertyType/Description

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="Description" type="xsd:string" minOccurs="0"/>
description	Description of device

7.3 Network specific information

element HRML

diagram	 The diagram illustrates the structure of the HRML element. It is a container element (represented by a rectangle with a small square at the bottom right) that contains a single child element, NetworkDescription (represented by a rectangle with a small square at the bottom right). The NetworkDescription element is of type NetworkDescriptionType, as indicated by the 'type' attribute shown below the element name.
properties	content complex
children	NetworkDescription
source	<pre><xsd:element name="HRML"> <xsd:complexType> <xsd:choice> <xsd:element name="NetworkDescription" type="NetworkDescriptionType"/> </xsd:choice> </xsd:complexType> </xsd:element></pre>
description	Home Resource management Markup Language, Container for resource information including device, network, physical space, service and so on.

IECNORM.COM : Click to view the full PDF of ISO/IEC 30100-2:2016

element HRML/NetworkDescription

diagram																	
properties	<table> <tr> <td>isRef</td> <td>0</td> </tr> <tr> <td>content</td> <td>complex</td> </tr> </table>	isRef	0	content	complex												
isRef	0																
content	complex																
children	NetworkLink																
attributes	<table> <tr> <td>Name</td> <td>NetworkID</td> </tr> <tr> <td>Type</td> <td>xsd:integer</td> </tr> <tr> <td>Use</td> <td>required</td> </tr> <tr> <td>Name</td> <td>numofnetworklink</td> </tr> <tr> <td>Type</td> <td>xsd:integer</td> </tr> <tr> <td>Use</td> <td>required</td> </tr> <tr> <td>Name</td> <td>TopologyType</td> </tr> <tr> <td>Type</td> <td>xsd:string</td> </tr> </table>	Name	NetworkID	Type	xsd:integer	Use	required	Name	numofnetworklink	Type	xsd:integer	Use	required	Name	TopologyType	Type	xsd:string
Name	NetworkID																
Type	xsd:integer																
Use	required																
Name	numofnetworklink																
Type	xsd:integer																
Use	required																
Name	TopologyType																
Type	xsd:string																
source	<xsd:element name="NetworkDescription" type="NetworkDescriptionType"/>																
description	Description of network domain																

element NetworkDescriptionType/NetworkLink

diagram	
properties	isRef 0 minOcc 1 maxOcc unbounded content complex
children	BasicProperty StatusProperty ConnectivityProperty AdditionalProperty
source	<xsd:element name="NetworkLink" type="NetworkLinkType" maxOccurs="unbounded"/>
description	Container of link information

element NetworkLinkType/BasicProperty

diagram	The diagram shows a BasicProperty element (type BasicPropertyType) connected to a BasicPropertyType container. The container includes the following elements: NetworkLinkID (type xsd:string) NetworkLinkName (type xsd:string) NetworkLinkType (type xsd:string) SecurityLevel (type xsd:string) PrivacyLevel (type xsd:string) Bandwidth (type BandwidthType)
properties	isRef 0 content complex
children	NetworkLinkID NetworkLinkName NetworkLinkType SecurityLevel PrivacyLevel Throughput
source	<xsd:element name="BasicProperty" type="BasicPropertyType"/>
description	Container for basic properties of NetworkLinkDescription

element NetworkLinkType/StatusProperty

diagram	The diagram shows a StatusProperty element (type StatusPropertyType) connected to a StatusPropertyType container. The container includes the following elements: Status (type StatusType) NetworkStatus (type NetworkStatusType)
properties	isRef 0 content complex
children	Status NetworkStatus
source	<xsd:element name="StatusProperty" type="StatusPropertyType"/>
description	Container for status properties of NetworkLinkDescription


element NetworkLinkType/ConnectivityProperty

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	ParentChildInfo NeighborList
source	<xsd:element name="ConnectivityProperty" type="ConnectivityPropertyType" minOccurs="0"/>
description	Container for connectivity properties of NetworkLinkDescription


element NetworkLinkType/AdditionalProperty

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	Description
source	<xsd:element name="AdditionalProperty" type="AdditionalPropertyType" minOccurs="0"/>
description	Container for additional properties of NetworkLinkDescription


element AdditionalPropertyType/Description

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="Description" type="xsd:string" minOccurs="0"/>
description	Additional description of a network link


element BasicPropertyType/NetworkLinkID

diagram	
properties	isRef 0 content simple
source	<xsd:element name="NetworkLinkID" type="xsd:string"/>
description	ID of a link


element BasicPropertyType/NetworkLinkName

diagram	
properties	isRef 0 content simple
source	<xsd:element name="NetworkLinkName" type="xsd:string"/>
description	Name of a link

element BasicPropertyType/NetworkLinkType

diagram	
properties	isRef 0 content simple
source	<xsd:element name="NetworkLinkType" type="xsd:string"/>
description	Type of a link

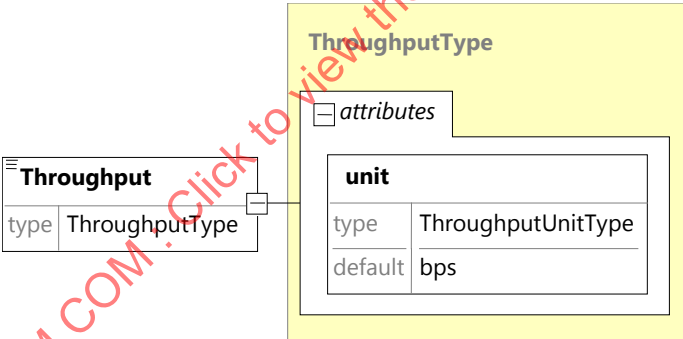
element BasicPropertyType/SecurityLevel

diagram	
properties	isRef 0 content simple
source	<xsd:element name=" SecurityLevel " type="xsd:string"/>
description	Securitylevel of a link

element BasicPropertyType/PrivacyLevel

diagram	
properties	isRef 0 content simple
source	<xsd:element name="PrivacyLevel " type="xsd:string"/>
description	Privacylevel of a link

element BasicPropertyType/Throughput

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content complex
attributes	Name unit Type ThroughputUnitType Default bps
source	<xsd:element name="Throughput" type="ThroughputType" minOccurs="0"/>
description	Total throughput of a link

element ConnectivityPropertyType/ParentChildInfo

diagram	
properties	isRef 0 content complex
children	ParentNode ChildNode
source	<xsd:element name="ParentChildInfo" type="ParentChildInfoType"/>
description	Container of parent or child node information

element ConnectivityPropertyType/NeighborList

diagram	
properties	isRef 0 content complex
children	Node
attributes	Name numofNeighbor Type xsd:integer Use required
source	<xsd:element name="NeighborList"> <xsd:complexType> <xsd:complexContent> <xsd:extension base="NodeListType"> <xsd:attribute name="numofNeighbor" type="xsd:integer" use="required"/> </xsd:extension> </xsd:complexContent> </xsd:complexType> </xsd:element>
description	Container of neighbor node information

attribute ConnectivityPropertyType/NeighborList/@numofNeighbor

properties	isRef 0 use required
source	<xsd:attribute name="numofNeighbor" type="xsd:integer" use="required"/>
description	Number of neighbor nodes

element NodeListType/Node

diagram	The diagram illustrates the structure of the Node element. It is a container element of type NodeType. The Node element contains four child elements: ID, Name, Type, and PhysicalAddress. Each child element is of type xsd:string. The Node element is shown as a container for these elements, with a dashed line indicating the relationship between the Node element and its children.
properties	isRef 0 content complex
children	ID Name Type PhysicalAddress
source	<xsd:element name="Node" type="NodeType"/>
description	Container of node information

element NodeType/ID

diagram	The diagram shows the ID element, which is a simple element of type xsd:string.
properties	isRef 0 content simple
source	<xsd:element name="ID" type="xsd:string"/>
description	ID of a node


element NodeType/Name

diagram	
properties	isRef 0 content simple
source	<xsd:element name="Name" type="xsd:string"/>
description	Name of a node

element NodeType/Type

diagram	
properties	isRef 0 content simple
source	<xsd:element name="Type" type="xsd:string"/>
description	Type of a node

element NodeType/PhysicalAddress

diagram	
properties	isRef 0 content simple
source	<xsd:element name="PhysicalAddress" type="xsd:string"/>
description	Physical address of a node


element ParentChildInfoType/ParentNode

diagram	The diagram illustrates the structure of the ParentNode element. It is a container element of type NodeType. Inside, it contains a sequence of four child elements: ID, Name, Type, and PhysicalAddress. Each child element is of type xsd:string. The ParentNode element is shown with a box containing 'type' and 'NodeType'. A dashed box labeled NodeType encloses the four child elements.
properties	isRef 0 content complex
children	ID Name Type PhysicalAddress
source	<xsd:element name="ParentNode" type="NodeType"/>
description	Container of a parent node information

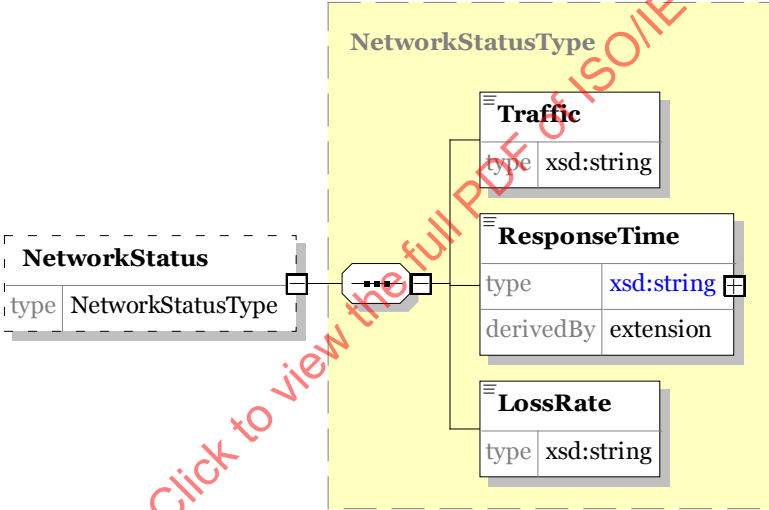
element ParentChildInfoType/ChildNode

diagram	The diagram illustrates the structure of the ChildNode element. It is a container element of type NodeType. Inside, it contains a sequence of four child elements: ID, Name, Type, and PhysicalAddress. Each child element is of type xsd:string. The ChildNode element is shown with a box containing 'type' and 'NodeType'. A dashed box labeled NodeType encloses the four child elements.
properties	isRef 0 content complex
children	ID Name Type PhysicalAddress
source	<xsd:element name="ChildNode" type="NodeType"/>
description	Container of a child node information

element StatusPropertyType/Status

diagram	
properties	isRef 0 content simple
facets	enumeration Online enumeration Offline enumeration Error
source	<xsd:element name="Status" type="StatusType"/>
description	Status of link such as online, offline, or error

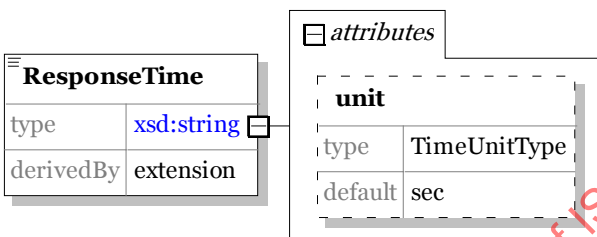
element StatusPropertyType/NetworkStatus

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	Traffic ResponseTime LossRate
source	<xsd:element name="NetworkStatus" type="NetworkStatusType" minOccurs="0"/>
description	Container for detail status information in case of online or error

element NetworkStatusType/Traffic

diagram	
properties	isRef 0 content simple
source	<xsd:element name="Traffic" type="xsd:string"/>
description	Container of current network traffic(kbps)


element NetworkStatusType/ResponseTime

diagram	
properties	isRef 0 content complex
attributes	Name unit Type TimeUnitType Default sec
source	<pre> <xsd:element name="ResponseTime"> <xsd:complexType> <xsd:simpleContent> <xsd:extension base="xsd:string"> <xsd:attribute name="unit" type="TimeUnitType" default="sec"/> </xsd:extension> </xsd:simpleContent> </xsd:complexType> </xsd:element> </pre>
description	Container of current response time

attribute NetworkStatusType/ResponseTime/@unit

properties	isRef 0 default sec
facets	enumeration sec enumeration msec enumeration usec
source	<xsd:attribute name="unit" type="TimeUnitType" default="sec"/>
description	Unit of response time

element NetworkStatusType/LossRate

diagram	
properties	isRef 0 content simple
source	<xsd:element name="LossRate" type="xsd:string"/>
description	Container of current loss rate

simpleType ThroughputUnitType

used by	attribute ThroughputType/@unit
facets	enumeration bps enumeration kbps enumeration mbps enumeration gbps
source	<xsd:simpleType name="ThroughputUnitType"> <xsd:restriction base="xsd:string"> <xsd:enumeration value="bps"/> <xsd:enumeration value="kbps"/> <xsd:enumeration value="mbps"/> <xsd:enumeration value="gbps"/> </xsd:restriction> </xsd:simpleType>
description	Type of throughput unit

IECNORM.COM : Click to view the full PDF of ISO/IEC 30100-2:2016

simpleType NetworkTypeType

facets	enumeration ethernet enumeration ieee1394 enumeration uwb enumeration usb enumeration plc enumeration 802.11 enumeration bluetooth enumeration zigbee enumeration rfid enumeration rs485 enumeration rs232 enumeration unknown
source	<pre> <xsd:simpleType name="NetworkTypeType"> <xsd:restriction base="xsd:string"> <xsd:enumeration value="ethernet"/> <xsd:enumeration value="ieee1394"/> <xsd:enumeration value="uwb"/> <xsd:enumeration value="usb"/> <xsd:enumeration value="plc"/> <xsd:enumeration value="802.11"/> <xsd:enumeration value="bluetooth"/> <xsd:enumeration value="zigbee"/> <xsd:enumeration value="rfid"/> <xsd:enumeration value="rs485"/> <xsd:enumeration value="rs232"/> <xsd:enumeration value="unknown"/> </xsd:restriction> </xsd:simpleType> </pre>
description	Type of network

simpleType StatusType

used by	element StatusPropertyType/Status
facets	enumeration Online enumeration Offline enumeration Error
source	<pre> <xsd:simpleType name="StatusType"> <xsd:restriction base="xsd:string"> <xsd:enumeration value="Online"/> <xsd:enumeration value="Offline"/> <xsd:enumeration value="Error"/> </xsd:restriction> </xsd:simpleType> </pre>
description	Type of network status

simpleType TimeUnitType

used by	attribute NetworkStatusType/ResponseTime/@unit
facets	enumeration sec enumeration msec enumeration usec
source	<pre><xsd:simpleType name="TimeUnitType"> <xsd:restriction base="xsd:string"> <xsd:enumeration value="sec"/> <xsd:enumeration value="msec"/> <xsd:enumeration value="usec"/> </xsd:restriction> </xsd:simpleType></pre>
description	Type of time unit

7.4 Physical space-specific information modelling

element HRML

diagram	
properties	content complex
children	PhysicalSpaceDescription
source	<pre><xsd:element name="HRML"> <xsd:complexType> <xsd:choice> <xsd:element name="PhysicalSpaceDescription" type="PhysicalSpaceDescriptionType"/> </xsd:choice> </xsd:complexType> </xsd:element></pre>
description	Home Resource management Markup Language. Container for resource information including device, network, physical space, service and so on.

element HRML/PhysicalSpaceDescription

diagram	
properties	isRef 0 content complex
children	BasicProperty AdditionalProperty
source	<pre><xsd:element name="PhysicalSpaceDescription" type="PhysicalSpaceDescriptionType"/></pre>
description	Description of physical space domain

element PhysicalSpaceDescriptionType/BasicProperty

diagram	
properties	isRef 0 content complex
children	PhysicalSpaceID PhysicalSpaceName PhysicalSpaceType SecurityLevel PrivacyLevel
source	<xsd:element name="BasicProperty" type="BasicPropertyType"/>
description	Container for basic properties of PhysicalSpaceDescription


element BasicPropertyType/PhysicalSpaceID

diagram	
properties	isRef 0 content simple
source	<xsd:element name="PhysicalSpaceID" type="xsd:string"/>
description	ID of physical space object

element BasicPropertyType/PhysicalSpaceName

diagram	
properties	isRef 0 content simple
source	<xsd:element name="PhysicalSpaceName" type="xsd:string"/>
description	Name of physical space object

element BasicPropertyType/PhysicalSpaceType

diagram	
properties	isRef 0 content simple
source	<xsd:element name="PhysicalSpaceType" type="xsd:string"/>
description	Type of physical space object

element BasicPropertyType/SecurityLevel

diagram	
properties	isRef 0 content simple
source	<xsd:element name="SecurityLevel" type="xsd:string"/>
description	SecurityLevel of physical space object

element BasicPropertyType/PrivacyLevel

diagram	
properties	isRef 0 content simple
source	<xsd:element name="PrivacyLevel" type="xsd:string"/>
description	PrivacyLevel of physical space object

element PhysicalSpaceDescriptionType/AdditionalProperty

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	ProjectInfo MaterialInfoList AttributeInfoList MeshInfoList DrawingFileInfo Description
source	<xsd:element name="AdditionalProperty" type="AdditionalPropertyType" minOccurs="0"/>
description	Container of additional properties for physical space description

element AdditionalPropertyType/ProjectInfo

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	ProjectID MeshURI TextureURL Date Version Note
source	<pre> <xsd:element name="ProjectInfo" minOccurs="0"> <xsd:complexType> <xsd:sequence> <xsd:element name="ProjectID" type="xsd:string"/> <xsd:element name="MeshURI" type="xsd:string"/> <xsd:element name="TextureURL" type="xsd:string"/> <xsd:element name="Date" type="xsd:date" minOccurs="0"/> <xsd:element name="Version" type="xsd:string" minOccurs="0"/> <xsd:element name="Note" type="xsd:string" minOccurs="0"/> </xsd:sequence> </xsd:complexType> </xsd:element> </pre>
description	Container of project information

element AdditionalPropertyType/ProjectInfo/ProjectID

diagram	
properties	isRef 0 content simple
source	<pre> <xsd:element name="ProjectID" type="xsd:string"/> </pre>
description	ID of project

element AdditionalPropertyType/ProjectInfo/MeshURI

diagram	
properties	isRef 0 content simple
source	<xsd:element name="MeshURI" type="xsd:string"/>
description	URI of Mesh File

element AdditionalPropertyType/ProjectInfo/TextureURL

diagram	
properties	isRef 0 content simple
source	<xsd:element name="TextureURL" type="xsd:string"/>
description	URI of Texture File


element AdditionalPropertyType/ProjectInfo/Date

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="Date" type="xsd:date" minOccurs="0"/>
description	Creation date of the project

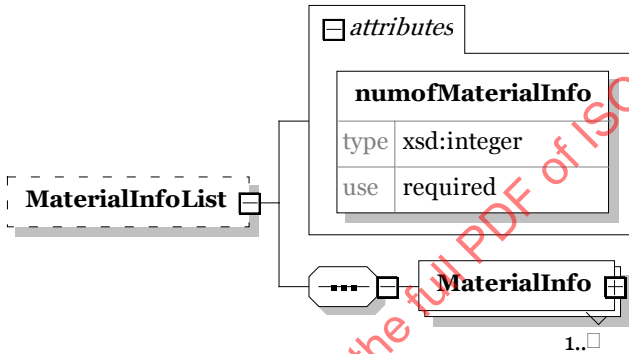
element AdditionalPropertyType/ProjectInfo/Version

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="Version" type="xsd:string" minOccurs="0"/>
description	Version of the project

element AdditionalPropertyType/ProjectInfo/Note

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="Note" type="xsd:string" minOccurs="0"/>
description	Extra information of the project

element AdditionalPropertyType/MaterialInfoList

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	MaterialInfo
attributes	Name numofMaterialInfo Type xsd:integer Use required
source	<pre> <xsd:element name="MaterialInfoList" minOccurs="0"> <xsd:complexType> <xsd:sequence> <xsd:element name="MaterialInfo" maxOccurs="unbounded"> <xsd:complexType> <xsd:sequence> <xsd:element name="MaterialID" type="xsd:string"/> <xsd:element name="Name" type="xsd:string"/> <xsd:element name="Type" type="xsd:string"/> <xsd:element name="MaterialFileName" type="xsd:string"/> </xsd:sequence> </xsd:complexType> </xsd:element> </xsd:sequence> <xsd:attribute name="numofMaterialInfo" type="xsd:integer" use="required"/> </xsd:complexType> </xsd:element> </pre>
description	Container of material information lists

attribute AdditionalPropertyType/MaterialInfoList/@numofMaterialInfo

properties	isRef 0 use required
source	<xsd:attribute name="numofMaterialInfo" type="xsd:integer" use="required"/>
description	Number of MaterialInfo

element AdditionalPropertyType/MaterialInfoList/MaterialInfo

diagram	The diagram illustrates the structure of the MaterialInfo element. It is a container element with a cardinality of 1..∞. It contains four child elements: MaterialID, Name, Type, and MaterialFileName, all of which are of type xsd:string.
properties	isRef 0 minOcc 1 maxOcc unbounded content complex
children	MaterialID Name Type MaterialFileName
source	<pre><xsd:element name="MaterialInfo" maxOccurs="unbounded"> <xsd:complexType> <xsd:sequence> <xsd:element name="MaterialID" type="xsd:string"/> <xsd:element name="Name" type="xsd:string"/> <xsd:element name="Type" type="xsd:string"/> <xsd:element name="MaterialFileName" type="xsd:string"/> </xsd:sequence> </xsd:complexType> </xsd:element></pre>
description	Container of material information

element AdditionalPropertyType/MaterialInfoList/MaterialInfo/MaterialID

diagram	The diagram illustrates the structure of the MaterialID element. It is a simple element of type xsd:string.
properties	isRef 0 content simple
source	<xsd:element name="MaterialID" type="xsd:string"/>
description	ID of material

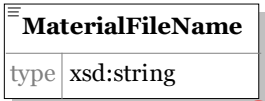
element AdditionalPropertyType/MaterialInfoList/MaterialInfo/Name

diagram	
properties	isRef 0 content simple
source	<xsd:element name="Name" type="xsd:string"/>
description	Name of material

element AdditionalPropertyType/MaterialInfoList/MaterialInfo/Type

diagram	
properties	isRef 0 content simple
source	<xsd:element name="Type" type="xsd:string"/>
description	Type of material

element AdditionalPropertyType/MaterialInfoList/MaterialInfo/MaterialFileName

diagram	
properties	isRef 0 content simple
source	<xsd:element name="MaterialFileName" type="xsd:string"/>
description	File name of material information

element AdditionalPropertyType/AttributeInfoList

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	AttributeInfo
attributes	Name numofAttributeInfo Type xsd:integer Use required
source	<pre> <xsd:element name="AttributeInfoList" minOccurs="0"> <xsd:complexType> <xsd:sequence> <xsd:element name="AttributeInfo" maxOccurs="unbounded"> <xsd:complexType> <xsd:sequence> <xsd:element name="AttributeSequence" type="xsd:string"/> <xsd:element name="AttributeID" type="xsd:string"/> <xsd:element name="AttributeName" type="xsd:string"/> <xsd:element name="Value" type="xsd:string"/> </xsd:sequence> </xsd:complexType> </xsd:element> </xsd:sequence> <xsd:attribute name="numofAttributeInfo" type="xsd:integer" use="required"/> </xsd:complexType> </xsd:element> </pre>
description	Container of attribute information lists

attribute AdditionalPropertyType/AttributeInfoList/@numofAttributeInfo

properties	isRef 0 use required
source	<pre> <xsd:attribute name="numofAttributeInfo" type="xsd:integer" use="required"/> </pre>
description	Number of AttributeInfo


element AdditionalPropertyType/AttributeInfoList/AttributeInfo

diagram	
properties	isRef 0 minOcc 1 maxOcc unbounded content complex
children	AttributeSequence AttributeID AttributeName Value
source	<pre> <xsd:element name="AttributeInfo" maxOccurs="unbounded"> <xsd:complexType> <xsd:sequence> <xsd:element name="AttributeSequence" type="xsd:string"/> <xsd:element name="AttributeID" type="xsd:string"/> <xsd:element name="AttributeName" type="xsd:string"/> <xsd:element name="Value" type="xsd:string"/> </xsd:sequence> </xsd:complexType> </xsd:element> </pre>
description	Container of attribute information


element AdditionalPropertyType/AttributeInfoList/AttributeInfo/AttributeSequence

diagram	
properties	isRef 0 content simple
source	<pre> <xsd:element name="AttributeSequence" type="xsd:string"/> </pre>
description	Sequence of attribute


element AdditionalPropertyType/AttributeInfoList/AttributeInfo/AttributeID

diagram	
properties	isRef 0 content simple
source	<xsd:element name="AttributeID" type="xsd:string"/>
description	ID of attribute

element AdditionalPropertyType/AttributeInfoList/AttributeInfo/AttributeName

diagram	
properties	isRef 0 content simple
source	<xsd:element name="AttributeName" type="xsd:string"/>
description	Name of attribute

element AdditionalPropertyType/AttributeInfoList/AttributeInfo/Value

diagram	
properties	isRef 0 content simple
source	<xsd:element name="Value" type="xsd:string"/>
description	Value of attribute

element AdditionalPropertyType/MeshInfoList

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	MeshInfo
attributes	Name numofMeshInfo Type xsd:integer Use required
source	<pre> <xsd:element name="MeshInfoList" minOccurs="0"> <xsd:complexType> <xsd:sequence> <xsd:element name="MeshInfo" maxOccurs="unbounded"> <xsd:complexType> <xsd:sequence> <xsd:element name="MeshID" type="xsd:string"/> <xsd:element name="SubMeshID" type="xsd:string"/> <xsd:element name="MeshFileName" type="xsd:string"/> <xsd:element name="Unit" type="xsd:string"/> </xsd:sequence> </xsd:complexType> </xsd:element> </xsd:sequence> <xsd:attribute name="numofMeshInfo" type="xsd:integer" use="required"/> </xsd:complexType> </xsd:element> </pre>
description	Container of polygonal mesh information lists

attribute AdditionalPropertyType/MeshInfoList/@numofMeshInfo

properties	isRef 0 use required
source	<pre> <xsd:attribute name="numofMeshInfo" type="xsd:integer" use="required"/> </pre>
description	Number of MeshInfo

element AdditionalPropertyType/MeshInfoList/MeshInfo

diagram	
properties	isRef 0 minOcc 1 maxOcc unbounded content complex
children	MeshID SubMeshID MeshFileName Unit
source	<pre><xsd:element name="MeshInfo" maxOccurs="unbounded"> <xsd:complexType> <xsd:sequence> <xsd:element name="MeshID" type="xsd:string"/> <xsd:element name="SubMeshID" type="xsd:string"/> <xsd:element name="MeshFileName" type="xsd:string"/> <xsd:element name="Unit" type="xsd:string"/> </xsd:sequence> </xsd:complexType> </xsd:element></pre>
description	Container of polygonal mesh information

element AdditionalPropertyType/MeshInfoList/MeshInfo/MeshID

diagram	
properties	isRef 0 content simple
source	<pre><xsd:element name="MeshID" type="xsd:string"/></pre>
description	ID of mesh information

element AdditionalPropertyType/MeshInfoList/MeshInfo/SubMeshID

diagram	
properties	isRef 0 content simple
source	<xsd:element name="SubMeshID" type="xsd:string"/>
description	ID of additional mesh information

element AdditionalPropertyType/MeshInfoList/MeshInfo/MeshFileName

diagram	
properties	isRef 0 content simple
source	<xsd:element name="MeshFileName" type="xsd:string"/>
description	File name of mesh information

element AdditionalPropertyType/MeshInfoList/MeshInfo/Unit

diagram	
properties	isRef 0 content simple
source	<xsd:element name="Unit" type="xsd:string"/>
description	Unit of mesh information

element AdditionalPropertyType/DrawingFileInfo

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	FileURI FileType FileName FileSize Extension
source	<pre> <xsd:element name="DrawingFileInfo" minOccurs="0"> <xsd:complexType> <xsd:sequence> <xsd:element name="FileURI" type="xsd:string"/> <xsd:element name="FileType" type="xsd:string"/> <xsd:element name="FileName" type="xsd:string"/> <xsd:element name="FileSize" type="xsd:string"/> <xsd:element name="Extension" type="xsd:string"/> </xsd:sequence> </xsd:complexType> </xsd:element> </pre>
description	Container of file information for drawing


element AdditionalPropertyType/DrawingFileInfo/FileURI

diagram	
properties	isRef 0 content simple
source	<pre> <xsd:element name="FileURI" type="xsd:string"/> </pre>
description	URI of the file for drawing

element AdditionalPropertyType/DrawingFileInfo/FileType

diagram	
properties	isRef 0 content simple
source	<xsd:element name="FileType" type="xsd:string"/>
description	Type of the file


element AdditionalPropertyType/DrawingFileInfo/FileName

diagram	
type	xsd:string
properties	isRef 0 content simple
source	<xsd:element name="FileName" type="xsd:string"/>
description	Name of the file


element AdditionalPropertyType/DrawingFileInfo/FileSize

diagram	
properties	isRef 0 content simple
source	<xsd:element name="FileSize" type="xsd:string"/>
description	Size of the file

element AdditionalPropertyType/DrawingFileInfo/Extension


diagram	
properties	isRef 0 content simple
source	<xsd:element name="Extension" type="xsd:string"/>
description	Extension of the file

element AdditionalPropertyType/Description

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="Description" type="xsd:string" minOccurs="0"/>
description	Description of the file

7.5 Service-Specific Information modelling

element HRML

diagram	
properties	content complex
children	ServiceDescription
source	<xsd:element name="HRML"> <xsd:complexType> <xsd:choice> <xsd:element name="ServiceDescription" type="ServiceDescriptionType"/> </xsd:choice> </xsd:complexType> </xsd:element>
description	Home Resource management Markup Language. Container for resource information including device, network, physical space, service and so on

element HRML/ServiceDescription


diagram	
properties	isRef 0 content complex
children	BasicProperty FunctionProperty StatusProperty AdditionalProperty
source	<xsd:element name="ServiceDescription" type="ServiceDescriptionType"/>
description	Container for service description of HRML

element ServiceDescriptionType/BasicProperty


diagram	The diagram illustrates the structure of the BasicPropertyType element. It consists of a sequence of the following elements, each with its data type: ServiceID: type <code>xsd:string</code> ServiceName: type <code>xsd:string</code> ServiceType: type <code>xsd:string</code> UserType: type <code>UserTypeType</code> SecurityLevel: type <code>xsd:string</code> PrivacyLevel: type <code>xsd:string</code> Version: type <code>xsd:string</code> Vendor: type <code>xsd:string</code> CreationDate: type <code>xsd:date</code> ReleaseNo: type <code>xsd:string</code> Size: type <code>xsd:string</code> Description: type <code>xsd:string</code> Priority: type <code>xsd:integer</code> A box labeled BasicPropertyType is connected to the Version element by a dashed line, indicating its role in the structure.
properties	isRef 0 content complex
children	ServiceID ServiceName ServiceType UserType SecurityLevel PrivacyLevel Version Vendor CreationDate ReleaseNo Size Description Priority
source	<xsd:element name="BasicProperty" type="BasicPropertyType"/>

description	Basic information of service
-------------	------------------------------

element ServiceDescriptionType/FunctionProperty

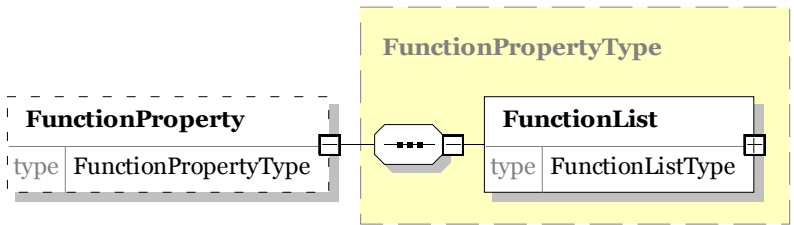diagram	 The diagram shows a dashed box labeled FunctionPropertyType. Inside, a box labeled FunctionProperty (type: FunctionPropertyType) is connected via a connector (a circle with three dots) to a box labeled FunctionList (type: FunctionListType). The FunctionList box is also inside the FunctionPropertyType dashed box.
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	FunctionList
source	<xsd:element name="FunctionProperty" type="FunctionPropertyType" minOccurs="0"/>
description	Function information of service

element ServiceDescriptionType/StatusProperty

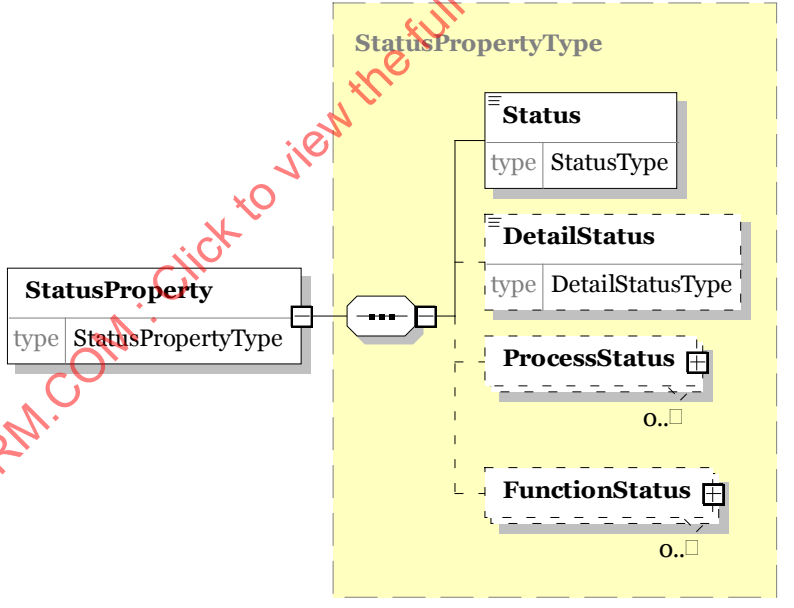diagram	 The diagram shows a dashed box labeled StatusPropertyType. Inside, a box labeled StatusProperty (type: StatusPropertyType) is connected via a connector (a circle with three dots) to a group of four boxes: Status (type: StatusType), DetailStatus (type: DetailStatusType), ProcessStatus (type: ProcessStatusType), and FunctionStatus (type: FunctionStatusType). The ProcessStatus and FunctionStatus boxes have a '0..1' cardinality indicator. The StatusPropertyType dashed box is highlighted in yellow.
properties	isRef 0 content complex
children	Status DetailStatus ProcessStatus FunctionStatus
source	<xsd:element name="StatusProperty" type="StatusPropertyType"/>
description	Status information of service


element ServiceDescriptionType/AdditionalProperty

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	LocationURI StartType RequiredHardwareSpec RequiredSoftwareSpec RequiredProtocolSpec ServiceSpecificInfo UISpecificInfo
source	<xsd:element name="AdditionalProperty" type="AdditionalPropertyType" minOccurs="0"/>
description	Additional information of service

element BasicPropertyType/ServiceID

diagram	
properties	isRef 0 content simple
source	<xsd:element name="ServiceID" type="xsd:string"/>
description	ID of service


element BasicPropertyType/ServiceName

diagram	
properties	isRef 0 content simple
source	<xsd:element name="ServiceName" type="xsd:string"/>
description	Name of service

element BasicPropertyType/ServiceType

diagram	
properties	isRef 0 content simple
source	<xsd:element name="ServiceType" type="xsd:string"/>
description	Type of service

element BasicPropertyType/UserType

diagram	
properties	isRef 0 content simple
facets	enumeration System enumeration EndUser
source	<xsd:element name="UserType" type="UserTypeType"/>
description	User type of service

element BasicPropertyType/SecurityLevel

diagram	
properties	isRef 0 content simple
source	<xsd:element name="SecurityLevel" type="string"/>
description	SecurityLevel of service


element BasicPropertyType/PrivacyLevel

diagram	
properties	isRef 0 content simple
source	<xsd:element name="PrivacyLevel" type="string"/>
description	PrivacyLevel of service


element BasicPropertyType/Version

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="Version" type="xsd:string" minOccurs="0"/>
description	Version of service


element BasicPropertyType/Vendor

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="Vendor" type="xsd:string" minOccurs="0"/>
description	Vendor of service


element BasicPropertyType/CreationDate

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="CreationDate" type="xsd:date" minOccurs="0"/>
description	Creation date of service


element BasicPropertyType/ReleaseNo

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="ReleaseNo" type="xsd:string" minOccurs="0"/>
description	Release number of service


element BasicPropertyType/Size

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="Size" type="xsd:string" minOccurs="0"/>
description	Size of service


element BasicPropertyType/Description

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="Description" type="xsd:string" minOccurs="0"/>
description	Description of service


element BasicPropertyType/Priority

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="Priority" type="xsd:integer" minOccurs="0"/>
description	Priority of service

element AdditionalPropertyType/LocationURI


diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="LocationURI" type="xsd:string" minOccurs="0"/>
description	Location URI of service

element AdditionalPropertyType/StartType

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
facets	enumeration Boot enumeration System enumeration Automatic enumeration Manual enumeration Disabled
source	<pre><xsd:element name="StartType" minOccurs="0"> <xsd:simpleType> <xsd:restriction base="xsd:string"> <xsd:enumeration value="Boot"/> <xsd:enumeration value="System"/> <xsd:enumeration value="Automatic"/> <xsd:enumeration value="Manual"/> <xsd:enumeration value="Disabled"/> </xsd:restriction> </xsd:simpleType> </xsd:element></pre>
description	Start type of service

IECNORM.COM : Click to view the full PDF of ISO/IEC 30100-2:2016


element AdditionalPropertyType/RequiredHardwareSpec

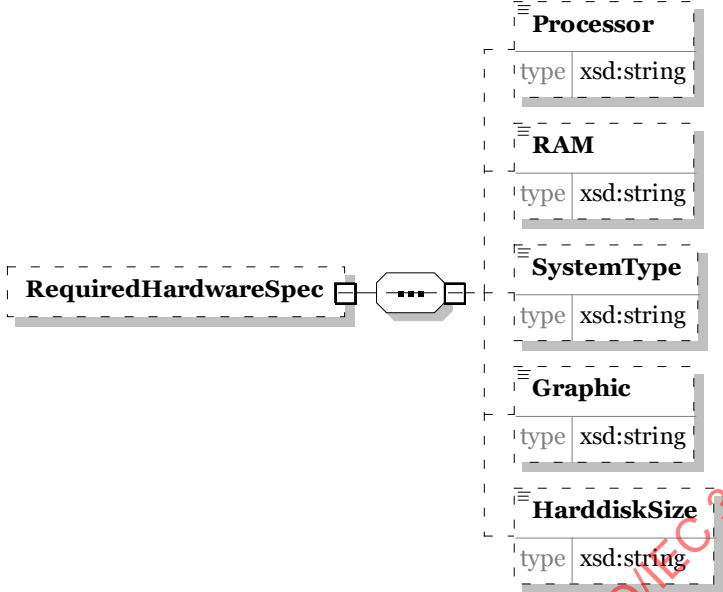diagram	 The diagram shows a dashed box labeled RequiredHardwareSpec containing a sequence of five elements: Processor, RAM, SystemType, Graphic, and HarddiskSize. Each element is shown with its type as <code>xsd:string</code>.
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	Processor RAM SystemType Graphic HarddiskSize
source	<pre><xsd:element name="RequiredHardwareSpec" minOccurs="0"> <xsd:complexType> <xsd:sequence> <xsd:element name="Processor" type="xsd:string" minOccurs="0"/> <xsd:element name="RAM" type="xsd:string" minOccurs="0"/> <xsd:element name="SystemType" type="xsd:string" minOccurs="0"/> <xsd:element name="Graphic" type="xsd:string" minOccurs="0"/> <xsd:element name="HarddiskSize" type="xsd:string" minOccurs="0"/> </xsd:sequence> </xsd:complexType> </xsd:element></pre>
description	Required hardware specification of service


element AdditionalPropertyType/RequiredHardwareSpec/Processor

diagram	 The diagram shows a dashed box labeled Processor containing a single element with type <code>xsd:string</code>.
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<pre><xsd:element name="Processor" type="xsd:string" minOccurs="0"/></pre>
description	Required processor information of service

element AdditionalPropertyType/RequiredHardwareSpec/RAM

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="RAM" type="xsd:string" minOccurs="0"/>
description	Required RAM information of service

element AdditionalPropertyType/RequiredHardwareSpec/SystemType

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="SystemType" type="xsd:string" minOccurs="0"/>
description	Required system type of service

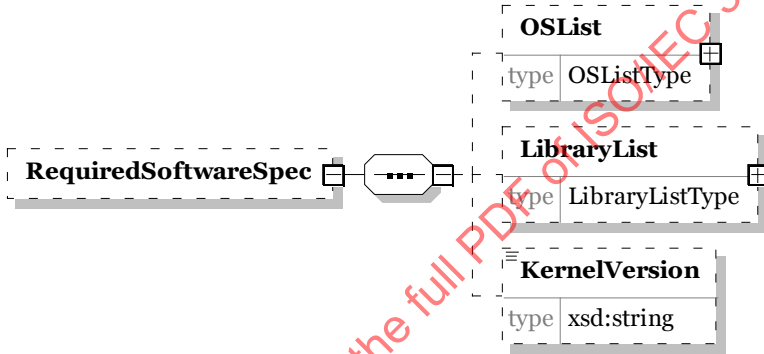
element AdditionalPropertyType/RequiredHardwareSpec/Graphic

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="Graphic" type="xsd:string" minOccurs="0"/>
description	Required graphic information of service

element AdditionalPropertyType/RequiredHardwareSpec/HarddiskSize

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="HarddiskSize" type="xsd:string" minOccurs="0"/>
description	Required hard disk size of service

element AdditionalPropertyType/RequiredSoftwareSpec

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	OSList LibraryList KernelVersion
source	<xsd:element name="RequiredSoftwareSpec" minOccurs="0"> <xsd:complexType> <xsd:sequence> <xsd:element name="OSList" type="OSListType" minOccurs="0"/> <xsd:element name="LibraryList" type="LibraryListType" minOccurs="0"/> <xsd:element name="KernelVersion" type="xsd:string" minOccurs="0"/> </xsd:sequence> </xsd:complexType> </xsd:element>
description	Required software information of service

element AdditionalPropertyType/RequiredSoftwareSpec/OSList

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	OS
attributes	Name numofOS Type xsd:integer Use required
source	<xsd:element name="OSList" type="OSListType" minOccurs="0"/>
description	Required OS list of service

element AdditionalPropertyType/RequiredSoftwareSpec/LibraryList

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	Library
attributes	Name numoflibrary Type xsd:integer Use required
source	<xsd:element name="LibraryList" type="LibraryListType" minOccurs="0"/>
description	Required library list of service

element AdditionalPropertyType/RequiredSoftwareSpec/KernelVersion

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="KernelVersion" type="xsd:string" minOccurs="0"/>
description	Required kernel version of service

element AdditionalPropertyType/RequiredProtocolSpec

diagram	The diagram illustrates the structure of the RequiredProtocolSpec element. It is a complex type derived from ProtocolListType. RequiredProtocolSpec has a type attribute of ProtocolListType. ProtocolListType has an attribute numofprotocol of type xsd:integer with a required use. It also contains a sequence of Protocol elements (indicated by a bag icon) of type ProtocolType, with a cardinality of 1..∞.
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	Protocol
attributes	Name numofprotocol Type xsd:integer Use required
source	<xsd:element name="RequiredProtocolSpec" type="ProtocolListType" minOccurs="0"/>
description	Required protocol information of service

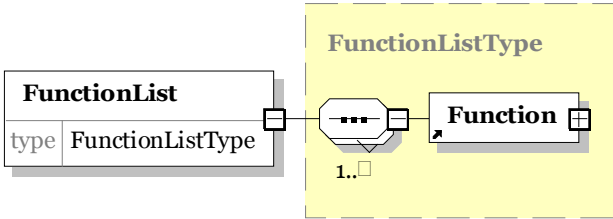
element AdditionalPropertyType/ServiceSpecificInfo

diagram	The diagram shows the ServiceSpecificInfo element with a dashed border. Its type is PropertyListType. It has an attribute numofproperty of type xsd:integer with a required use. The content is a sequence of Property elements, indicated by a box with three dots and a cardinality of 1..1.
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	Property
attributes	Name numofproperty Type xsd:integer Use required
source	<xsd:element name="ServiceSpecificInfo" type="PropertyListType" minOccurs="0"/>
description	User-defined properties for service specific information

element AdditionalPropertyType/UISpecificInfo

diagram	The diagram shows the UISpecificInfo element with a dashed border. Its type is UIInfoListType. The content is a sequence of UIInfo elements, indicated by a box with three dots and a cardinality of 1..1.
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	UIInfo
source	<xsd:element name="UISpecificInfo" type="UIInfoListType" minOccurs="0"/>
description	User interface specific information of service

element FunctionPropertyType/FunctionList

diagram	 The diagram illustrates the structure of the FunctionList element. It is a container element of type FunctionListType that contains a sequence of Function elements. The cardinality of the sequence is 1 to infinity (1..∞).
properties	isRef 0 content complex
children	Function
source	<xsd:element name="FunctionList" type="FunctionListType"/>
description	Lists of Function


IECNORM.COM : Click to view the full PDF of ISO/IEC 30100-2:2016

element Function


diagram	The diagram shows the structure of the Function element. It is a complex type containing several child elements. The first five are required: FunctionName (xsd:string), FunctionNameDescription (xsd:string), FunctionID (xsd:string), Category (xsd:string), and Sharable (xsd:integer). The remaining five are optional, indicated by dashed boxes and a small square icon: ProtocolInfo (ProtocolListType), InputListSize (xsd:string), InputList (InputListType), OutputListSize (xsd:string), and OutputList (OutputListType). A 'Function' box is connected to a sequence container '...' which then branches into the optional elements.
properties	content complex
children	FunctionName FunctionNameDescription FunctionID Category Sharable ProtocolInfo InputListSize InputList OutputListSize OutputList
used by	complexType FunctionListType
source	<pre> <xsd:element name="Function"> <xsd:complexType> <xsd:sequence> <xsd:element name="FunctionName" type="xsd:string"/> <xsd:element name="FunctionNameDescription" type="xsd:string"/> <xsd:element name="FunctionID" type="xsd:string"/> <xsd:element name="Category" type="xsd:string"/> <xsd:element name="Sharable" type="xsd:integer"/> <xsd:element name="ProtocolInfo" type="ProtocolListType" minOccurs="0"/> <xsd:element name="InputListSize" type="xsd:string" minOccurs="0"/> <xsd:element name="InputList" type="InputListType" minOccurs="0"/> <xsd:element name="OutputListSize" type="xsd:string" minOccurs="0"/> <xsd:element name="OutputList" type="OutputListType" minOccurs="0"/> </xsd:sequence> </xsd:complexType> </xsd:element> </pre>

description	Specific functions of single device
-------------	-------------------------------------

element Function/FunctionName

diagram	
properties	isRef 0 content simple
source	<xsd:element name="FunctionName" type="xsd:string"/>
description	Name of a Function


element Function/FunctionNameDescription

diagram	
properties	isRef 0 content simple
source	<xsd:element name="FunctionNameDescription" type="xsd:string"/>
description	Name-description of a Function


element Function/FunctionID

diagram	
properties	isRef 0 content simple
source	<xsd:element name="FunctionID" type="xsd:string"/>
description	ID of a Function


element Function/Category

diagram	
properties	isRef 0 content simple
source	<xsd:element name="Category" type="xsd:string"/>
description	Category of function


element Function/Sharable

diagram	
properties	isRef 0 content simple
source	<xsd:element name="Sharable" type="xsd:integer"/>
description	Sharable capacity of function. 0 presents unlimited, 1 presents exclusive and another integer number presents the number of capacity.


element Function/ProtocolInfo

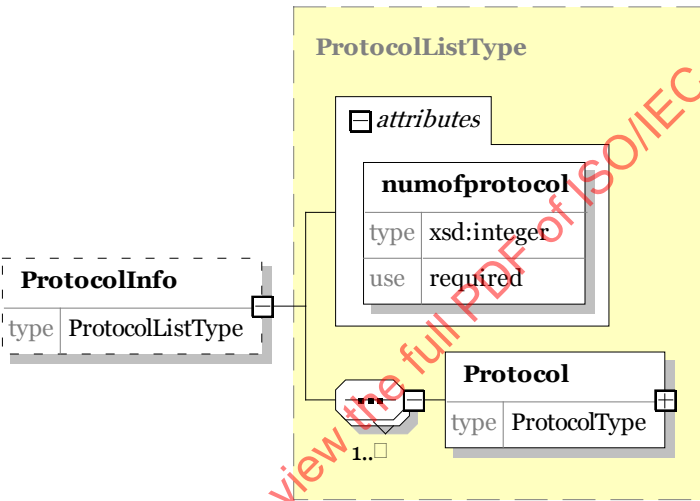diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	Protocol
attributes	Name numofprotocol Type xsd:integer Use required
source	<xsd:element name="ProtocolInfo" type="ProtocolListType" minOccurs="0"/>
description	Protocol information of function

element Function/InputListSize

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="InputListSize" type="xsd:string" minOccurs="0"/>
description	Number of Input and Inputs


element Function/InputList

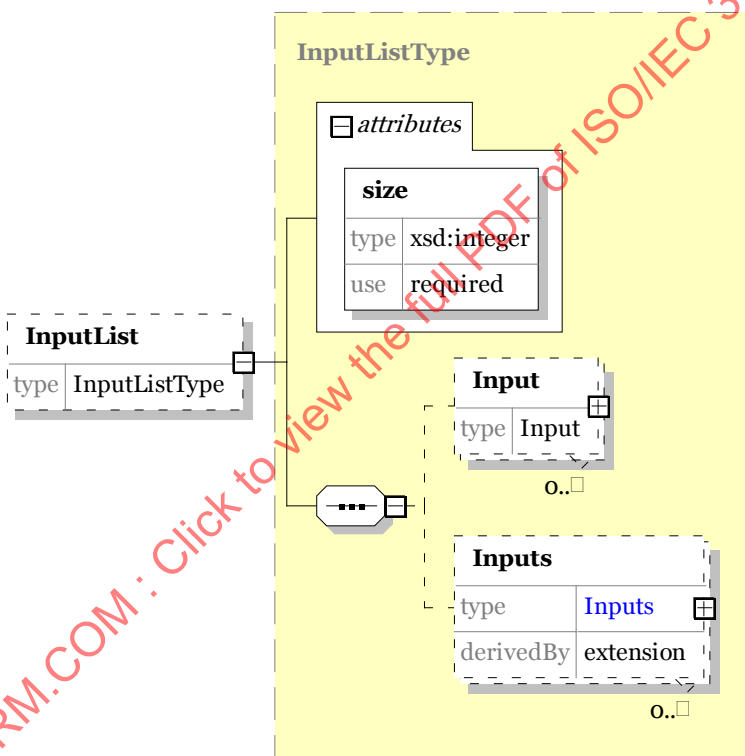diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	Input Inputs
attributes	Name size Type xsd:integer Use required
source	<xsd:element name="InputList" type="InputListType" minOccurs="0"/>
description	List of Input and Inputs

element Function/OutputListSize

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="OutputListSize" type="xsd:string" minOccurs="0"/>
description	Number of Output and Outputs

element Function/OutputList

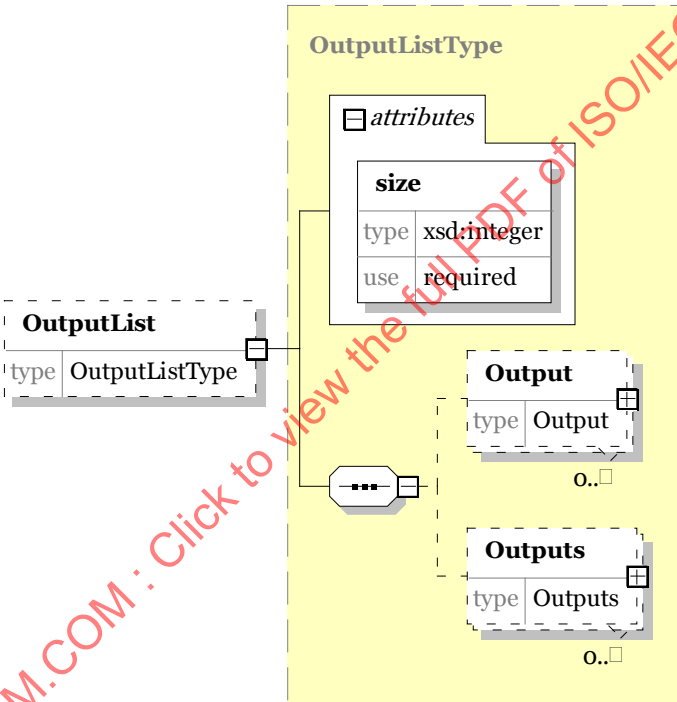diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content complex
children	Output Outputs
attributes	Name size Type xsd:integer Use required
source	<xsd:element name="OutputList" type="OutputListType" minOccurs="0"/>
description	List of Output and Outputs

element FunctionStatusValueData

diagram	The diagram illustrates the structure of the FunctionStatusValueData element. It is a complex type derived by extension from <code>xsd:string</code>. It contains two attributes: id (type <code>xsd:string</code>, use <code>optional</code>) and name (type <code>xsd:string</code>).										
properties	content complex										
used by	complexType FunctionListType										
attributes	<table> <tr> <td>Name</td><td>id</td></tr> <tr> <td>Type</td><td>xsd:string</td></tr> <tr> <td>Use</td><td>optional</td></tr> <tr> <td>Name</td><td>name</td></tr> <tr> <td>Type</td><td>xsd:string</td></tr> </table>	Name	id	Type	xsd:string	Use	optional	Name	name	Type	xsd:string
Name	id										
Type	xsd:string										
Use	optional										
Name	name										
Type	xsd:string										
source	<pre><xsd:element name="FunctionStatusValueData"> <xsd:complexType> <xsd:simpleContent> <xsd:extension base="xsd:string"> <xsd:attribute name="id" type="xsd:string" use="optional"/> <xsd:attribute name="name" type="xsd:string"/> </xsd:extension> </xsd:simpleContent> </xsd:complexType> </xsd:element></pre>										
description	Current value of FunctionStatusValue										


attribute FunctionStatusValueData/@id

properties	<table> <tr> <td>isRef</td><td>0</td></tr> <tr> <td>use</td><td>optional</td></tr> </table>	isRef	0	use	optional
isRef	0				
use	optional				
source	<xsd:attribute name="id" type="xsd:string" use="optional"/>				
description	ID of a FunctionStatusValueData				


attribute FunctionStatusValueData/@name

properties	<table> <tr> <td>isRef</td><td>0</td></tr> </table>	isRef	0
isRef	0		
source	<xsd:attribute name="name" type="xsd:string"/>		
description	Name of a FunctionStatusValueData		


element Property

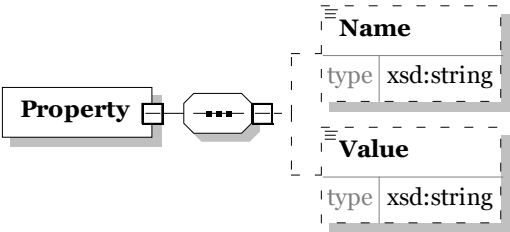diagram	
properties	content complex
children	Name Value
used by	complexType FunctionListType
source	<pre> <xsd:element name="Property"> <xsd:complexType> <xsd:sequence> <xsd:element name="Name" type="xsd:string" minOccurs="0"/> <xsd:element name="Value" type="xsd:string" minOccurs="0"/> </xsd:sequence> </xsd:complexType> </xsd:element> </pre>
description	User-defined property

element Property/Name

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<pre> <xsd:element name="Name" type="xsd:string" minOccurs="0"/> </pre>
description	Name of property

element Property/Value

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<pre> <xsd:element name="Value" type="xsd:string" minOccurs="0"/> </pre>
description	Value of property

element UIInfo

diagram	
properties	content complex
children	Name URI
used by	complexType UIInfoListType
attributes	Name numofUIInfo Type xsd:integer Use required
source	<pre> <xsd:element name="UIInfo"> <xsd:complexType> <xsd:sequence> <xsd:element name="Name" type="xsd:string" minOccurs="0"/> <xsd:element name="URI" type="xsd:string" minOccurs="0"/> </xsd:sequence> <xsd:attribute name="numofUIInfo" type="xsd:integer" use="required"/> </xsd:complexType> </xsd:element> </pre>
description	User Interface Information of service

attribute UIInfo/@numofUIInfo

properties	isRef 0 use required
source	<pre> <xsd:attribute name="numofUIInfo" type="xsd:integer" use="required"/> </pre>
description	Number of User Interface Information


element UIInfo/Name

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="Name" type="xsd:string" minOccurs="0"/>
description	Name of User Interface

element UIInfo/URI

diagram	
properties	isRef 0 minOcc 0 maxOcc 1 content simple
source	<xsd:element name="URI" type="xsd:string" minOccurs="0"/>
description	URI of User Interface

element FunctionStatusType/FunctionID

diagram	
properties	isRef 0 content simple
source	<xsd:element name="FunctionID" type="xsd:string"/>
description	ID of a Function

element FunctionStatusType/SharableStatus

diagram	
properties	isRef 0 content simple
source	<xsd:element name="SharableStatus" type="xsd:integer"/>
description	Sharable status of a Function