
**Space systems — Programme
management — Material, mechanical
parts and processes**

*Systèmes spatiaux — Management de programme — Matériaux,
éléments mécaniques et procédés*

STANDARDSISO.COM : Click to view the full PDF of ISO 10794:2018



STANDARDSISO.COM : Click to view the full PDF of ISO 10794:2018



COPYRIGHT PROTECTED DOCUMENT

© ISO 2018

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword.....	v
Introduction.....	vi
1 Scope.....	1
2 Normative references.....	1
3 Terms and definitions.....	1
4 Abbreviated terms.....	2
5 General requirements.....	3
5.1 Materials, Mechanical Parts and Processes Programme (MMPP) management requirement.....	3
5.1.1 Overview.....	3
5.1.2 MMPP plan.....	3
5.1.3 Management.....	4
5.1.4 Material, Mechanical Parts, Processes Control Board (MPCB).....	4
5.2 Management and consolidation of the activities.....	7
5.2.1 Relationship.....	7
5.2.2 Establishing and processing of lists.....	7
5.2.3 Management of the lists.....	8
5.2.4 Supplier role and responsibilities.....	9
5.3 Technical constraints.....	9
5.4 Cleanliness and contamination control.....	9
5.5 Safety hazardous parts and materials.....	9
5.6 Optical, mechanical or electrical GSE hardware.....	10
6 Material control.....	10
6.1 Technical criteria for selection of materials.....	10
6.2 Selection.....	14
6.3 Declared materials list content.....	15
6.4 Criticality analysis.....	15
6.5 Evaluation and validation phases.....	16
6.5.1 General.....	16
6.5.2 Evaluation phase.....	16
6.5.3 Validation phase.....	16
6.5.4 Approval phase.....	16
6.5.5 Deviation request.....	16
6.6 Procurement of materials.....	17
6.6.1 Procurement specifications.....	17
6.6.2 Incoming inspection procedure.....	17
6.7 Use of materials.....	17
6.7.1 Validation status of materials.....	17
6.7.2 Traceability of materials.....	17
6.7.3 Packaging, storage, removal from storage.....	17
6.7.4 Limited-life materials before implementation.....	17
6.7.5 Limited-life materials after implementation.....	18
6.7.6 Materials' non-conformances and alerts.....	18
6.7.7 Health and safety.....	18
7 Mechanical parts control.....	18
7.1 Verification of mechanical parts.....	18
7.2 Selection.....	18
7.3 Declared mechanical parts list.....	18
7.4 Criticality analysis.....	19
7.5 Evaluation and qualification phases.....	19
7.5.1 General.....	19
7.5.2 Evaluation phase.....	19

7.5.3	Qualification phase	20
7.5.4	Approval phase	20
7.5.5	Deviation request	20
7.6	Procurement of mechanical parts	20
7.6.1	General	20
7.6.2	Procurement specification	20
7.6.3	Source inspection	20
7.6.4	Incoming inspection procedure	21
7.7	Use of mechanical parts	21
7.7.1	Qualification status of mechanical parts	21
7.7.2	Traceability of mechanical parts	21
7.7.3	Packaging, storage, removal from storage	21
7.7.4	Limited-life mechanical parts or parts subject to wearout	21
7.7.5	Mechanical parts non-conformances and alerts	21
8	Process control	21
8.1	Specifications or procedures	21
8.2	Process selection and training	21
8.3	Declared processes list content	22
8.4	Criticality analysis	23
8.5	Evaluation and verification phase	23
8.5.1	General	23
8.5.2	Evaluation phase	23
8.5.3	Verification phase	23
8.5.4	Approval phase	24
8.5.5	Deviation request	24
8.6	Use of a process	24
8.6.1	Verification status of a process	24
8.6.2	Re-verification of a process	24
8.6.3	Implementation of a process	24
8.6.4	Traceability of processes	25
8.6.5	Process non-conformances and alerts	25
8.6.6	Mandatory inspection points (MIPs)	25
8.6.7	Packaging, storage, removal from storage	25
Annex A	(informative) Relationship between materials, mechanical parts, processes activities and programme phase	26
Annex B	(normative) Declared materials list — Document requirements definition	28
Annex C	(normative) Declared mechanical parts list — Document requirements definition	33
Annex D	(normative) Declared processes list — Document requirements definition	38
Annex E	(normative) Request for approval (RFA) — Document requirements definition	42
Bibliography	46

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html

This document was prepared by Technical Committee ISO/TC 20, *Aircraft and space vehicles*, Subcommittee SC 14, *Space systems and operations*.

This edition of ISO 10794:2018 cancels and replaces the edition ISO 10794:2011, which has been technically revised and includes the following changes:

- bacterial and fungus growth has been added;
- Hydrogen embrittlement has been added; and
- manned environment has been added.

Introduction

This document is intended for application by the management in space programmes and applications.

The formation of this document takes into account the existing International Standards prepared by ISO/TC 176, notably ISO 9000, ISO 9001 and ISO 9004, and the content of ISO 14300-1 and ISO 14300-2.

This document specifies the requirements and statements applicable to materials, mechanical parts and processes to satisfy the mission performance requirements.

This document also specifies the documentation requirements and the procedures relevant to obtaining approval for the use of materials, mechanical parts and processes in the fabrication of space systems and associated equipment.

STANDARDSISO.COM : Click to view the full PDF of ISO 10794:2018

Space systems — Programme management — Material, mechanical parts and processes

1 Scope

This document defines the programme management requirements for material, mechanical parts and processes for projects covering mission definition, design, development, production and operations of space systems, including disposal.

This document covers the following:

- management, including organization, reviews, acceptance status and documentation control;
- selection criteria and rules;
- evaluation, validation and qualification, or verification testing;
- procurement and receiving inspection; and
- utilization criteria and rules.

This document applies to all space deliverable products and all programme phases.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 14300-2, *Space systems — Programme management — Part 2: Product assurance*

ISO 27025, *Space systems — Programme management — Quality assurance requirements*

ISO 23461, *Space systems — Programme management — Non-conformance control system*

ISO 9000, *Quality management systems — Fundamentals and vocabulary*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 9000 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

3.1

critical material

material that is new to an individual company or non-validated for the particular application and environment, or that has caused problems during previous use that remain unresolved

3.2

critical mechanical part

mechanical part that requires specific attention or control due to fracture mechanics aspects and limited-life aspects, or with which the contractor has no previous experience of using the mechanical part in the specific application and environment or are new or non-qualified, or that has caused problems during previous use that remain unsolved

3.3

critical process

process new to an individual company or non-verified for the application in question or has caused problems during previous use that remain unresolved

3.4

mechanical part

piece of hardware that is not electrical, electronic or electromechanical and that performs a simple elementary function or part of a function in such a way that it can be evaluated as a whole against expected requirements of performance and cannot be disassembled without destroying this capability

3.5

process

set of interrelated or interacting activities that transforms inputs into outputs

Note 1 to entry: See ISO 9000.

Note 2 to entry: In this document, "process" means the manufacturing process of product, i.e. set of interrelated resources and activities which transforms a material or semi-finished product into a semi-finished product or final product.

3.6

request for approval

document by which the supplier or user asks the competent body for permission to use a critical material, part or process

3.7

special process

process where quality cannot be completely ensured by inspection of the end article only

4 Abbreviated terms

The following abbreviated terms are defined and used within this document.

AA	Aluminium Association
AOCS	attitude and orbit control system
ATOX	atomic oxygen
AISI	American Iron and Steel Institute
CDA	Copper Development Association
CDR	critical design review
CFRP	carbon fibre reinforced polymer
CI	configuration item number (as per project definition)
DML	declared materials list
DMPL	declared mechanical parts list

DPL	declared processes list
DRD	document requirements definition
EEE	electrical, electronic and electromechanical
ESA	European Space Agency
GOX	gaseous oxygen
GSE	ground support equipment
LEO	low earth orbit
LOX	liquid oxygen
MIP	mandatory inspection point
MMPP	materials, mechanical parts and processes
MPCB	Material, Mechanical Parts and Process Control Board
NASA	National Aeronautics and Space Administration
NCR	non-conformance report
NRB	non-conformance review board
PA	product assurance
PDR	preliminary design review
PID	process identification document
PMP	parts, materials, processes
QR	qualification review
QRR	qualification review report
RFA	request for approval
RFD	request for deviation
SCC	stress corrosion cracking

5 General requirements

5.1 Materials, Mechanical Parts and Processes Programme (MMPP) management requirement

5.1.1 Overview

The general MMPP activity within the framework of a project is summarized in [Figures 1](#) and [2](#).

5.1.2 MMPP plan

The suppliers shall prepare, maintain and implement a MMPP plan, as part of the overall PA plan in accordance with ISO 14300-2 and this document, or exist as a separate document.

The MMPP plan shall be submitted to the customer for approval.

5.1.3 Management

The supplier shall appoint a MMPP manager. The MMPP Manager shall ensure that the Materials, Mechanical Parts and Processes used to manufacture a spacecraft or a launcher satisfy both the ground and flight functional requirements and constraints of the project. To obtain the validation status for materials and qualification status for parts and verification status for processes, the MMPP manager shall present to the customer activities which were performed in conformance with this document together with results obtained.

5.1.4 Material, Mechanical Parts, Processes Control Board (MPCB)

The MMPP manager shall organize Material, Mechanical Parts and Processes Control Board (MPCB) with his or her suppliers at all levels, as appropriate. The MPCB activity shall start not later than at PDR. The MMPP Manager shall agree with the customer on the MPCB's activities at PDR. Minimum tasks of the MPCB shall be as follows:

- coordination of the initiation and approval of RFA's in conformance with DRD from the [Annex E](#) by involving the relevant technical discipline;
- review and approval of test programme and related results;
- review of preliminary Declared Materials, Mechanical Parts and Processes Lists and of any available evidence to support the approval, by the PDR;
- review and approval of Declared Materials, Mechanical Parts and Processes Lists and of the evidence for the approval by the CDR; and
- review and approval of any change to the approved Declared Materials, Mechanical Parts and Processes Lists.

STANDARDSISO.COM : Click to view the full PDF of ISO 10794:2018

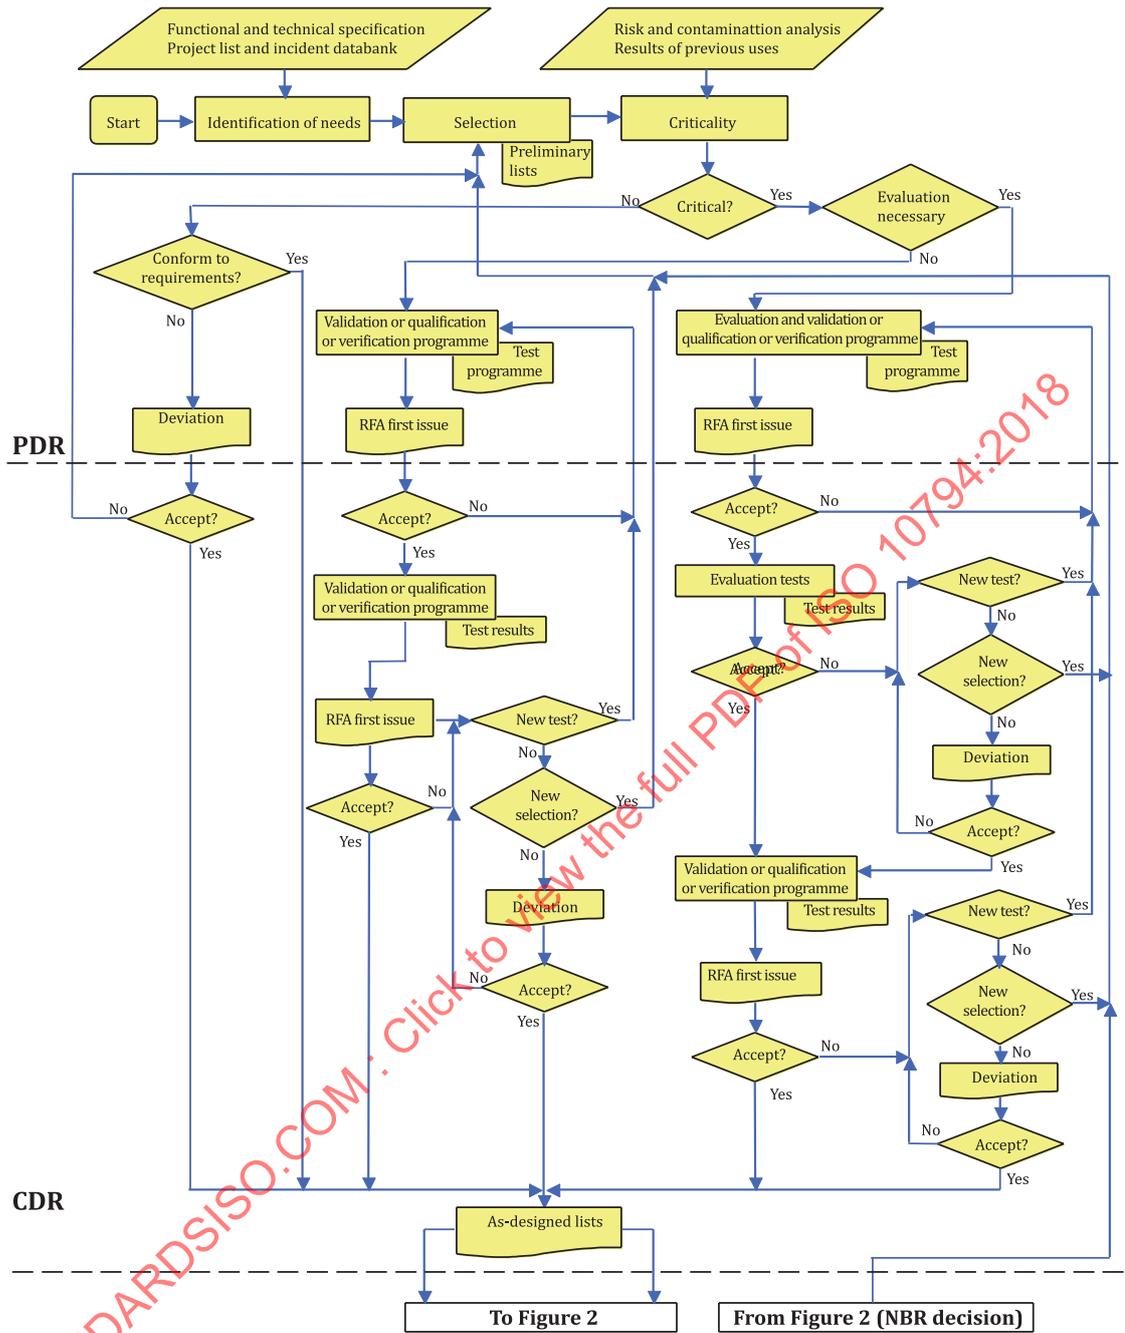


Figure 1 — Materials, mechanical parts and processes flow chart (continued in [Figure 2](#))

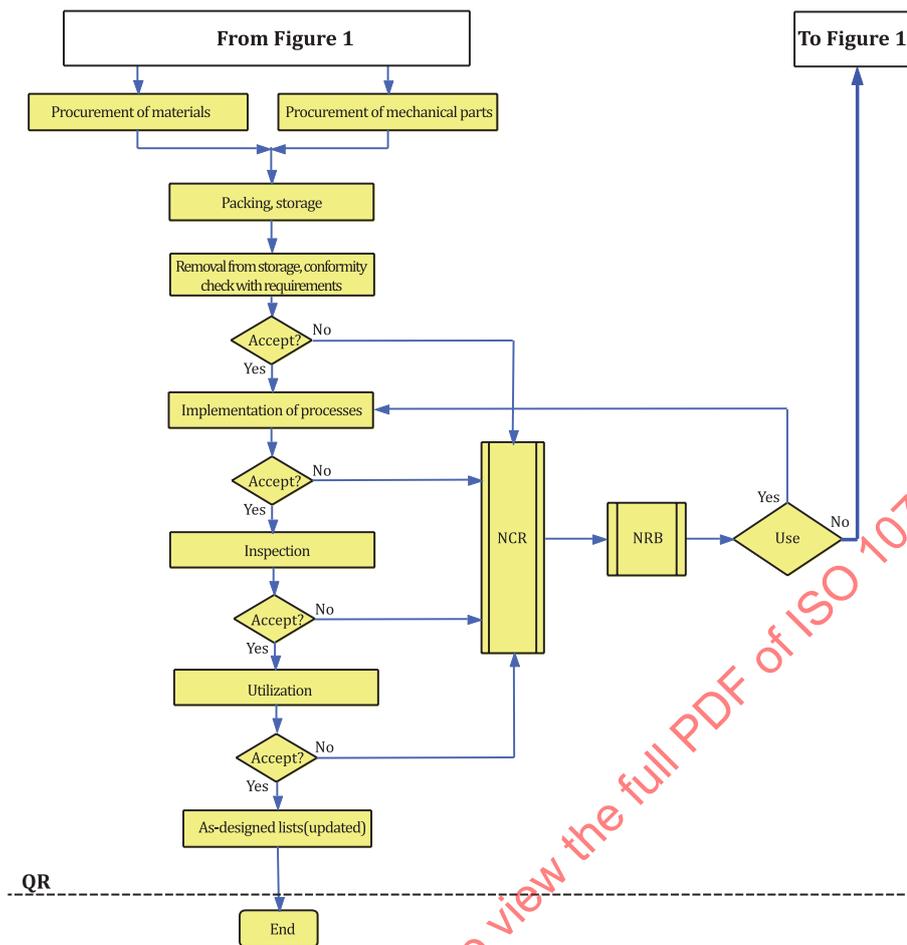


Figure 2 — Materials, mechanical parts and processes flow chart (continued from Figure 1)

STANDARDSISO.COM : Click to view the full PDF of ISO 10794:2018

Table 1 — Steps to be taken to get approval for materials, mechanical parts and processes

Approval process for materials, mechanical parts and processes (MMPP)						
Phase	Materials		Mechanical parts		Processes	
	Step	Comments	Step	Comments	Step	Comments
Critical analysis	1	—	1	—	1	—
Evaluation (usually by test methods defined by national agency standards)	2	Critical materials are tested, e.g. outgassing, SCC, flammability.	2	Mechanical parts are tested by, for example, vibration, thermal analysis, offgassing and life test.	2	Critical processes are evaluated by testing “technology samples” including all, for example, electrical interconnection processes and painting, adhesive bonding.
Verification/validation/qualification	3	Validation	3	Qualification	3	Verification
Approval	4	By RFA (see Annex E) or DML	4	By RFA (see Annex E) or DMPL/DPL	4	By RFA (see Annex E) or DPL
NOTE 1	Project approval is always by means of the request for approval (RFA) form and the project's declared materials list (DML), declared mechanical parts list (DMPL) and declared processes list (DPL).					
NOTE 2	The details for approvals of MMPP lists are contained in this document.					
NOTE 3	To summarize: Materials are validated. Mechanical parts are qualified. Processes are verified. And in addition: Skills training schools are customer approved. Outside test or evaluation laboratories are customer approved. Operators and inspectors for critical processes are trained, competent and monitored.					

5.2 Management and consolidation of the activities

5.2.1 Relationship

The relationship between materials and processes activities and programme phases is shown in [Annex A](#).

5.2.2 Establishing and processing of lists

5.2.2.1 Each supplier and lower-level supplier shall establish, collect, review and deliver the declared materials, mechanical parts and processes lists including all the items intended for use in the flight equipment. The lists shall reflect the current design at the time of issue. These lists shall contain the materials, mechanical parts and processes used in the current design. The objectives are as follows:

- compliance with all requirements of the programme;
- verification of the results of equipment supplier activities; and
- control and monitoring the status of materials, mechanical parts and processes in conformance with programme milestones. For additional information, see informative [Annex A](#).

5.2.2.2 The following constraints should be assessed:

- requirements originating from the functional specifications;
- requirements and conditions specific to the project;

- maximum use of the materials and processes described in approved data sources, e.g. national agency standards, and items already approved on similar projects; and
- use of project related preferred lists, if available.

5.2.2.3 An analysis of the criticality of these preliminary lists shall be performed as such that, after checking the conformity of the materials, mechanical parts and processes against all the project requirements, allow them to be classified into three categories:

- critical items, subject to evaluation, validation, qualification, or verification programmes;
- items that are not critical but which do not conform to one or more project requirements; and
- non-critical items.

For items classified as critical, a request for approval shall be submitted in conformance with [Annex E](#). For items classified as not critical but which are not in conformance with one or more project requirements, a justified deviation request should be drafted.

5.2.3 Management of the lists

The supplier shall document all materials in the Declared materials list in conformance with [Annex B](#).

The supplier shall document all mechanical parts in the Declared mechanical parts list in conformance with [Annex C](#).

The supplier shall document all processes in the Declared process list in conformance with [Annex D](#).

The supplier shall process the lists of lower-level suppliers to ensure exchangeability, traceability, searchability, sortability, storability and retrievability for that set of lists, before submitting it to the customer.

These lists shall be updated during the course of the project. The preliminary lists shall include the items from suppliers' preliminary requirements and are used to identify those that are critical (available for the PDR).

The as-designed lists shall include the items from the baseline's various design files, available for the CDR.

Any change after CDR or QR shall be reflected in the list and shall be in accordance with [Figure 2](#).

The MMPP manager is responsible within the programme to ensure that all the information needed is given and that the approval status is consistent with technical and scheduling objectives and that the data are exchangeable.

Where no project requirements exist for a separate DMPL, the mechanical parts can be entered into a separate section of the DML.

The materials of, for example, bearings, screw and nuts that are made up of a few materials, can be listed in the DMPL. The materials (metals and plastics) of complex parts can be listed in the DML with, for example, outgassing, toxicity, flammability, corrosion and stress corrosion values and reference to the DMPL item.

The supplier shall establish, collect, review and deliver the declared materials, mechanical parts and processes lists in an electronic format in conformance with [Annex B](#), [Annex C](#), and [Annex D](#).

The supplier shall demonstrate that the lists have been formally approved prior to their delivery to the customer.

5.2.4 Supplier role and responsibilities

5.2.4.1 The supplier shall be responsible for the following tasks:

- obtaining the correct and complete lists from lower-level suppliers;
- providing provisional and, later, definitive approval for each list; and
- submitting the project declared lists for approval prior to initiation of the hardware phase, before CDR.

The lists specified in the requirement by the suppliers shall include all the information described in this document. Amendments to the lists shall be implemented through established change procedures.

5.2.4.2 The following documentation shall be delivered to the customer upon request:

- RFA with reference and issue in conformance with DRD in [Annex E](#);
- evaluation reports; and
- deviation requests.

The material, mechanical parts or process justification files shall be made available to the customer upon request either on the supplier site, or by any other process agreed by both parties.

NOTE For example, by non-disclosure agreement.

5.3 Technical constraints

Mechanical parts, materials and processes shall satisfy the mission's functional requirements and constraints. Mechanical parts, materials and processes shall satisfy both ground environment constraints (e.g. manufacture, tests, storage, maintenance, transport and integration) as well as flight requirements and flight constraints (launch and orbit).

The estimated availability of the parts and products obtained from materials and processes used shall be compatible with the space system's life cycle (tests, storage and mission).

5.4 Cleanliness and contamination control

The supplier shall establish and maintain a contamination and cleanliness control programme including, as a minimum:

- cleaning procedures; and
- cleanliness monitoring procedures or methods.

The risks of chemical or particle pollution generated by parts, materials or processes used shall be identified and reduced in accordance with mission requirements (cleanliness or contamination analysis).

For cleanliness- or contamination-critical applications, a chemical and particle requirement specification and a specific cleanliness control plan shall be established.

5.5 Safety hazardous parts and materials

Mechanical parts and materials with hazardous characteristics shall be identified, managed and processed according to customer standards.

5.6 Optical, mechanical or electrical GSE hardware

When optical, mechanical or electrical GSE materials are used in thermal vacuum or interfacing with flight hardware, possible degradation shall be assessed (e.g. contamination, surface degradation, flammability, electromechanical and chemical effects).

6 Material control

6.1 Technical criteria for selection of materials

Material design data shall be generated for the intended service conditions using test and analysis procedures approved by the customer. Material properties shall be compatible with the environments to which they are exposed during terrestrial testing prior to launch, and during the mission.

The following requirements shall be taken into account only if the environmental conditions of the mission require their application. The agency- or customer-specific requirements, test methods and acceptance or rejection criteria shall be applied.

- a) Temperature: Material properties shall be compatible with the thermal environment to which they are exposed. Examples of thermal environment are also the passage through transitions, ductile-brittle temperatures, e.g. phase transitions, ductile-brittle transition temperatures for metals, glass transition (T_g) for polymer materials, and environmental factors which affect these properties, such as moisture.
- b) Thermal cycling and thermo optical: Materials subject to thermal cycling shall be assessed for their ability to withstand induced thermal stress and shall be tested according to approved procedures. Thermo optical properties shall be evaluated in conformance technical requirements. Directional effects due to manufacturing or processing shall be evaluated via dedicated testing to be agreed with customer.
- c) Vacuum:
 - Outgassing screening tests shall be carried out according to approved procedures. The screening process applied depends on the application.
 - All organic materials for use in space systems shall be evaluated to determine their outgassing characteristics.
 - The need for retest outgassing characteristics of materials used for an extended period of time at a temperature higher than 50 °C should be mutually agreed with the customer.
- d) Offgassing, toxicity: Spacecraft and associated equipment shall be manufactured from materials and by processes that do not cause an unacceptable hazard to personnel or hardware, whether on the ground or in space. For materials for the use in manned compartments of a spacecraft or space segment elements, offgassing and toxicity analysis shall be performed. The levels of offgassing and toxicity shall be agreed with customer.
- e) Flammability: The materials flammability resistance shall be evaluated for the most hazardous environment envisaged for their use, and be applicable to:
 - unmanned spacecraft or space segment elements launched by a manned space transportation system when powered on launch; and
 - manned spacecraft and space segment elements.
- f) Radiation:
 - Materials exposed to radiation shall be assessed to determine their resistance to the radiation dosage expected during the mission.

- Evaluation of materials resistance to radiation shall include the combined effects of particle radiation and ultraviolet radiation in the normal space environment, along with any mission-specific radiation levels.
 - The effect of bleaching due to vacuum or air recovery shall be evaluated, in case ex-situ measurements are performed.
 - In case synergistic testing is not possible it shall be proven that synergistic effects caused by radiation and temperature are not degrading the materials' properties.
 - In case technical limits prevent the synergistic testing approach, it shall be so justified, and the justification for sequential testing shall be provided.
- g) Electrical charge and discharge: External surfaces of the spacecraft shall be sufficiently conductive, interconnected and grounded to the spacecraft structure to avoid the build-up of differential charges.
- h) Corrosion: For all materials that come into contact with atmospheric gases, cleaning fluids or other chemicals, it shall be demonstrated that the degradation of properties during their anticipated service life is acceptable in terms of the performance and integrity requirements. All mechanical parts, assemblies and equipment, including spares, shall be finished to provide protection from corrosion.
- i) Stress corrosion:
- Materials used for structural and load-bearing applications (subject to tensile stress) shall be selected in conformance with approved data sources.
 - Any material not covered by an approved standard shall be tested according to approved procedures.
- j) Fluid compatibility:
- Materials within the system exposed to reactive fluids, both directly and as a result of single point failures when failure propagation effects cause hazardous operation of interfacing hardware shall be compatible with that fluid in their application. Examples of reactive fluids are liquid oxygen (LOX) and gaseous oxygen (GOX).
 - The compatibility of materials which are or can come into contact with LOX or GOX shall be evaluated except the case specified in the requirement.
 - In case no compatibility data are available, tests shall be performed for reactive fluids other than oxygen.
- k) Galvanic compatibility: When bimetallic contacts are used, the choice of the pair of metallic materials used shall be agreed with the customer. This also includes metal-to-conductive fibre-reinforced materials contacts. Galvanic compatibilities shall be selected in conformance with [Table 2](#). Materials not listed in [Table 2](#) shall be evaluated in a flight-simulated configuration using an accelerated environment to be agreed by the customer.
- l) Atomic oxygen:
- All materials for use on the external surfaces of spacecraft for use in low earth orbit (LEO) altitudes, between 200 km and 700 km, shall be evaluated for their resistance to atomic oxygen (ATOX). The flux level varies with altitude, velocity vector and solar activity. Fluence levels vary with the duration of exposure.
 - Test procedures shall be subject to the approval of the customer.

The effect of ATOX on thermo optical properties including specularities shall be evaluated.

Table 2 — Compatible couples for bimetallic contacts

Pure metals and alloys in alphabetical order (including carbon)	Aluminium Copper alloys	Al (pure), Al Zinc alloys	Cadmium	Cast iron (austenitic)	Chromium	Copper, Brasses	Cupro Nickel, Albronzes, Sibronzes	Gold, Platinum, Carbon, Rhodium	Gunmetal (Cu Zn10 alloy), Pbronzes, Snbronzes	Magnesium	Nickel, Monel, Inconel, Nickel/Molybdenum alloys	Silver	SnPb alloys (all), Tin, Lead	Stainless steel 18/8 (300 series)	Stainless steel 13Cr (400 series)	Steel (carbon, low alloy), Cast iron	Titanium and Tialloys	Zinc, Beryllium
Aluminium Copper alloys	1	1	3	3	3	3	3	3	3	2	2	3	1	2	2	3	2	2
Al (pure) AlZinc alloys	1	3	3	3	3	3	3	3	3	2	3	3	2	3	3	3	3	2
Cadmium			2	2	2	2	2	2	2	1	2	2	0	1	1	2	2	2
Cast iron (austenitic)				1	1	1	2	1	3	1	2	1	1	1	1	2	1	3
Chromium					1	0	0	1	3	1	0	2	0	0	0	2	0	3
Copper, Brasses						0	2	0	3	1	1	2	1	1	3	0	3	
Cupro Nickel Albronzes Sibronzes							2	0	3	1	1	2	2	1	3	0	3	
Gold Platinum, Carbon Rhodium								2	3	2	0	3	0	1	3	0	3	
Gunmetal (CuZn10 alloy) Pbronzes Snbronzes									3	1	1	1	0	0	3	0	3	
Magnesium										3	3	2	3	3	3	3	3	
Nickel Monel Inconel Nickel/Molybdenum alloys											2	2	1	0	2	1	3	
Silver												3	0	0	3	0	3	
SnPb alloys (all) Tin, Lead													1	1	1	3	1	
Stainless steel 18/8 (300 series)														1	3	0	3	
Stainless steel 13Cr (400 series)															3	0	3	
Steel (carbon, low alloy) Cast iron																0	3	

Table 2 (continued)

Pure metals and alloys in alphabetical order (including carbon)	Aluminium Copper alloys	Al (pure), Al Zinc alloys	Cadmium	Cast iron (austenitic)	Chromium	Copper, Brass	Cupro Nickel, Albronzes, Sibronzes	Gold, Platinum, Carbon, Rhodium	Gunmetal (Cu Zn10 alloy), Pbronzes, Sbnronzes	Magnesium	Nickel, Monel, Inconel, Nickel/Molybdenum alloys	Silver	SnPb alloys (all), Tin, Lead	Stainless steel 18/8 (300 series)	Stainless steel 13Cr (400 series)	Steel (carbon, low alloy), Cast iron	Titanium and Tialloys	Zinc, Beryllium
Titanium and Tialloys																		3
Zinc Beryllium																		

Key:
 0 - Can be used without restriction.
 1 - Can be used in a noncontrolled environment (e.g. assembly area and general nonclean room environment).
 2 - Can be used in a clean room environment.
 3 - Needs specific measures to avoid galvanic corrosion when these combinations are selected.

- m) Micrometeoroids and debris: The effect of impacts by micrometeoroids and debris on materials shall be reviewed and assessed on a case-by-case basis and their use shall comply with safety evaluation and assessment results concerning design and application criteria or details. Micrometeoroids and debris analysis and test procedures shall be subject to the approval by the customer.
- n) Moisture absorption and desorption: Moisture absorption shall be prevented during manufacture and storage of hygroscopic materials.
- o) Mechanical contact surface effects (cold welding, fretting, wear): For all solid surfaces in moving contact with other solid surfaces, it shall be demonstrated that the degradation of surface properties over the complete mission does not prevent to meet the performance requirements. For all solid surfaces, moving or in static contact with other solid surfaces, and intended to be separated it shall be demonstrated that the increase in separation force during the physical contact does not exceed the specified limit.
- p) Life: materials shall be selected that they will meet the material performance requirements during all their specified lifetime.
- q) Bacterial and fungus growth: Materials selected for manned or fluid systems shall not support bacterial or fungus growth, and be sterilizable. The extent of the degradation by the sterilization process shall be determined to define margins for design implementation. The design and qualification of an equipment to be sterilised shall implement the defined margins for sterilization degradation. The level of bacterial growth and fungus contamination shall be determined on the assembled hardware. Evaluation of organic materials used in the pressurized environment of long-term, manned spacecraft shall be performed prior to selection and verification.
- r) Hydrogen embrittlement: The possibility of hydrogen embrittlement occurring during component manufacture or use shall be assessed. The material evaluation shall be performed including the assessment of a protection and control. Based on the assessment protection and control measures shall be implemented to avoid hydrogen embrittlement during both mechanical parts manufacturing and use. Hydrogen embrittlement can be introduced for example during e.g. plating, welding. Mechanical parts subject to fatigue or sustained loading stresses, which are made of material susceptible to hydrogen embrittlement, shall be heat treated after coating.

6.2 Selection

6.2.1 Materials shall be chosen as follows:

- If an identical application in other space programme similar with respect to environment constraints and lifetime to the proposed application exist, use materials used in such an application;
- those for which satisfactory evaluation results have been obtained on samples representative of the application with a sufficient margin as regards conditions of use;
- those included in approved data sources, for example ESA and NASA data banks.

6.2.2 Whether the materials are already validated or remain to be validated, their selection shall ensure that the following criteria:

- continuity of supply;
- reproducibility of characteristics;
- approved supplier/distributor;
- mechanical properties of materials processed according to a specified technique; and
- environmental-stability properties under space conditions, together with mission- or application-specific requirements.

6.2.3 Each critical material shall be validated for the specific application. Critical material should include the ones of approved data sources.

6.2.4 Space-proven materials with heritage covering the specific mission requirements shall be selected at the earliest design stage. The supplier shall be responsible for the selection of materials that are capable of meeting the requirements of his business agreement. The supplier shall be responsible for storing and maintain all materials data in an internal database. The access to the data shall be granted to the customer.

6.2.5 To achieve high reliability and good performance, the use of a material shall be restricted to within its maximum qualified range of physical and mechanical properties.

6.2.6 All test methods and inspection techniques used to verify material characteristics and final products shall conform to standards approved by the customer. All test methods and inspection techniques shall not be used before approval by the customer.

6.2.7 The following constraints should be assessed:

- Pure tin finish with more than 97 % purity shall not be used. This is due to the possibility of whisker growth and transformation to grey tin powder at low temperatures.
- The incoming inspection of each EEE component batch shall include the verification of the termination composition to avoid assembly of pure tin finish.
- Cadmium and Zinc shall not be used as raw material or surface treatment for flight hardware.
- Cadmium and Zinc shall not be used for ground support equipment exposed to vacuum or when in contact with the flight hardware. For example, during thermal vacuum testing phases on ground.
- The incoming inspection of each non-EEE component batch shall include the verification of the metallic surface treatment to avoid assembly of pure tin, cadmium or zinc finish.
- The materials presented in the following shall not be used:

- a) beryllium oxide;
- b) mercury and its compounds;
- c) polyvinyl chloride (PVC); and
- d) radioactive material.

NOTE This list is not exhaustive.

- Beryllium shall not be used for structures.
- Beryllium shall not be used in applications other than structures, unless it has been approved by customer and all safety requirements are implemented by the supplier.

6.3 Declared materials list content

The declared materials list (DML) shall be broken down into clear categories to facilitate locating each item in the documentation (an example of such a breakdown is given in the DML DRD). For additional information, see [Annex B](#). The DML shall include the following information:

- issue status of DML;
- unique item number (as the reference of the material in the DML) that shall be the same throughout the duration of the project;
- material designation (commercial identification);
- material keys, e.g. AISI; AA; CDA, UNS, ASTM;
- chemical nature and type of product;
- manufacturer's name and procurement specifications or standards;
- summary of processing parameters (e.g. finish, temper condition, mix ratio and curing);
- use and location;
- environmental code;
- size code, test data (e.g. outgassing, stress corrosion cracking, corrosion and test data references); and
- approval status (with reference to the approval authority, to test report and similar previous applications)

Any coding or acronyms used within the list shall be defined within the document. An example of a suitable completed DML format is given in [Table B.4](#) in the DML DRD. For additional information, see [Annex B](#).

6.4 Criticality analysis

The objective of the analysis is to identify whether further data are required to conform to mission requirements.

- a) The supplier shall analyse all the materials contained in his or her preliminary lists with respect to criticality and in correlation with the risk analysis performed.
- b) Any material not meeting the project requirements shall be the subject of an RFA that is submitted to the next customer.
- c) The RFA shall include the reason and details of the subsequent evaluation and validation that it is necessary to perform. For additional information, see informative [Annex E](#) and [5.2.2](#).

6.5 Evaluation and validation phases

6.5.1 General

Depending on the results of the criticality analysis, the supplier shall perform an evaluation phase before the validation phase for all critical materials with unknown characteristics (new materials) or with major changes in the use or in the configuration.

In case of an extension of an existing application, the evaluation need not be performed if so agreed with the customer.

Guaranteed characteristics of materials and material supplier inspection methods, together with associated documents, shall be available for review at the supplier's premises before the start of evaluation or qualification phases.

6.5.2 Evaluation phase

The evaluation shall assess as a minimum the following:

- the limits of use;
- the material's physical, chemical or functional characteristics along with their values and tolerances;
- behavioural tendencies and degradation processes depending on environmental parameters including sensitivity to pollution; and
- acceptance criteria.

When evaluation is performed, the supplier shall provide an evaluation programme at PDR, and an evaluation report before CDR, in accordance with [Figures 1](#) and [2](#) and [Table 1](#).

6.5.3 Validation phase

For all critical materials, a validation programme available at PDR shall be drawn up by the supplier and then implemented to check or confirm that the materials satisfy the mission requirements with specified margins as necessary to obtain validation status.

Validation status shall be decided at CDR in view of the available results obtained written in validation report and the review of corresponding documentation.

The validation programme and report shall be approved by the customer.

6.5.4 Approval phase

The material shall not receive an approval identification in the declared material list for the project unless the requirements specified in [6.5.2](#) and [6.5.3](#) are satisfied.

If approval is not granted, the supplier in charge of the item shall either

- select another material;
- propose a modified evaluation programme and resubmit for approval; or
- if the above actions fail to achieve positive results, initiate a deviation procedure.

6.5.5 Deviation request

For materials not conforming to project requirements, whether at the end of criticality analysis or of evaluation and validation tests, the supplier shall submit a request for deviation in accordance with ISO 27025.

6.6 Procurement of materials

6.6.1 Procurement specifications

All materials shall be procured to an internationally or nationally specification approved by the supplier quality system or an in-house fully configured procurement specification that defines the material's properties, the material's requirements, the test methods, the acceptance criteria for the specific applications, source inspection (if any) and material supplier inspection.

Where material suppliers do not accept specifications and procurement is by means of a datasheet, the supplier shall introduce internal, in-house receipt inspection to ensure that the validation status of the material is maintained during the subsequent procurements.

Materials with long lead times or long procurement delays versus the project schedule shall be identified before the formal subsystem PDR. Procurement shall be planned, documented and implemented to obtain reliable product assurance provision at CDR. Back-up plans shall be prepared and initiated whenever there is evidence of possible delays or technical problems.

The material requirements shall be accepted by the material supplier or manufacturer.

6.6.2 Incoming inspection procedure

All materials shall be submitted to an incoming inspection.

An incoming inspection procedure shall define the inspections and tests to be carried out, particularly for materials that are known to have variable in their final properties.

6.7 Use of materials

6.7.1 Validation status of materials

The supplier shall verify that all critical materials are validated before being used in the manufacture of qualification or flight products. Any modification, change of condition or configuration of application shall lead to a re-evaluation in conformance with the process shown in [Figure 1](#).

6.7.2 Traceability of materials

The supplier shall apply the traceability rules defined in ISO 27025 to all materials.

Materials shall be identified by a unique reference number, code or a lot number to provide traceability.

NOTE The traceability allow to reconstruct the materials history, either individually (individual traceability) or by the manufacturing lot of which it was a part (lot traceability) in case of an incident or nonconformance, or a need for a technical investigation following failure or damage.

6.7.3 Packaging, storage, removal from storage

The supplier shall define provisions for packaging, storage and removal from storage for materials.

Measurements and inspections used to guarantee the material integrity and monitoring during storage and removal from storage shall be identified.

6.7.4 Limited-life materials before implementation

The supplier shall ensure that all materials that have limited-life characteristics have their date of manufacture or date of delivery and shelf-life expiry date identified and clearly marked on each lot or batch.

Materials that have exceeded their shelf-life expiry date shall not be recertified until the physical and chemical characteristics are inspected and the parameters, subject to deterioration, are evaluated for continued acceptability according to the acceptance and rejection criteria.

6.7.5 Limited-life materials after implementation

Materials with limited life after implementation shall be identified and controlled in conformance with requirements.

NOTE 1 Propellant is an example of material with limited-life after implementation

NOTE 2 Storage and mission life are criteria for the assessment and control of those materials.

6.7.6 Materials' non-conformances and alerts

Non-conformances and alerts shall be managed in accordance with ISO 27025.

6.7.7 Health and safety

Material safety data sheet or equivalent shall be available for all materials.

7 Mechanical parts control

7.1 Verification of mechanical parts

The supplier shall verify that all materials and processes used in the mechanical parts satisfy the mission technical requirements.

7.2 Selection

Mechanical parts shall be chosen from those successfully used for an identical application in other space programmes similar with respect to environment constraints and lifetime.

Type reduction actions shall be implemented at all levels of the programme.

Whether the mechanical parts are already qualified or remain to be qualified, their selection shall ensure that the following criteria are met:

- durability of supply; and
- reproducibility of characteristics;

The supplier shall be responsible for storing and maintain all mechanical parts data in an internal database. The access to the data, shall be granted to the customer.

7.3 Declared mechanical parts list

The declared mechanical parts list (DMPL) shall be broken down into distinct categories to enable easy identification of each item in the documentation. (A breakdown is given in the DMPL DRD. For additional information, see [Annex C](#).)

The DMPL format shall include the following information:

- item number (as the reference of the part in the DMPL); it shall be the same throughout the duration of the project;
- part designation (commercial identification);
- type of part;

- manufacturer and procurement specifications or standards;
- summary of functions and characteristics;
- use and location;
- environmental code; and
- approval status (with reference to the approval authority, to test report and similar previous applications).

Any coding or acronyms used within the list shall be defined within the document. Only those mechanical parts procured to a specification as a finished product shall be entered on the DMPL. An example of a suitable DMPL format is given in the DMPL DRD. For additional information, see [Annex C](#).

7.4 Criticality analysis

The objective of the analysis is to identify whether further data are required to conform to mission requirements.

- a) The supplier shall analyse all the mechanical parts contained in their preliminary lists with respect to criticality and in correlation with the risk analyses performed.
- b) Critical parts shall be identified in the DMPL and included in the critical items list.
- c) Any critical part shall be the subject of an RFA in conformance with [Annex E](#) submitted to customer.

7.5 Evaluation and qualification phases

7.5.1 General

Depending on the results of the criticality analysis, the supplier shall perform an evaluation phase before the qualification phases for all critical parts with unknown characteristics or with major changes in the use or in the configuration.

In case of an extension of an existing application, the evaluation need not be performed if so agreed with the customer.

Guaranteed characteristics of materials and material supplier inspection methods, together with associated documents, shall be available for review at the supplier's premises before the start of evaluation or qualification phases.

NOTE Reference can be made to [Table 1](#) for an explanation of the steps involved.

7.5.2 Evaluation phase

The evaluation shall include the following, as a minimum, for each critical part:

- the limits of use;
- the part's physical or functional characteristics, along with its values and tolerances;
- the behavioural tendencies and degradation processes depending on environment parameters, including sensitivity to pollution; and
- the acceptance criteria.

When an evaluation is performed, the supplier shall provide an evaluation programme at PDR, and an evaluation report before CDR.

The behaviour of the parameters that will be monitored (e.g. variation and change over time) that were also recorded during the evaluation programme tests shall serve as a reference for the analysis of qualification test results.

7.5.3 Qualification phase

For each critical part, a qualification programme shall be drawn up by the supplier of the equipment using the critical part and then implemented to check or confirm whether the parts satisfy mission requirements with specified margins.

Qualification status shall be decided at CDR in view of the available result obtained, written in qualification report, and the reviews of corresponding documentation.

The qualification programme and report shall be submitted to the customer for approval.

7.5.4 Approval phase

The mechanical parts shall not receive an approval identification in the declared mechanical parts list for the project unless the requirements from [7.5.2](#) and [7.5.3](#) are satisfied.

If approval is not granted, the supplier in charge of the item shall either:

- select another mechanical part; or
- propose a modified evaluation programme and resubmit for approval; or
- initiate a deviation procedure if the above actions fail to achieve positive results.

7.5.5 Deviation request

For mechanical parts not conforming to project requirements, whether at the end of criticality analysis or of evaluation and qualification tests, the supplier shall submit a deviation, in accordance with ISO 27025.

7.6 Procurement of mechanical parts

7.6.1 General

Mechanical parts with long lead times or procurement delays, versus the project schedule, shall be identified before the formal subsystem PDR. Procurement shall be planned, documented and implemented to obtain reliable product assurance provision at CDR.

Back-up plans shall be prepared and initiated whenever there is evidence of possible delays or technical problems.

7.6.2 Procurement specification

Each part shall be covered by a procurement specification or a standard approved by the supplier quality system. These procurement specifications shall define the part characteristics, requirements, tests methods, acceptance criteria, lot acceptance testing, source inspection and material supplier inspection. The procurement specifications shall be explicitly accepted by the mechanical part supplier or manufacturer.

7.6.3 Source inspection

For complex mechanical parts related to a specific project development, each supplier shall define the nature and frequency of their own source inspection points. Source inspection shall be carried out by the customer on the premises of the supplier, mechanical part manufacturer in accordance with ISO 27025.

7.6.4 Incoming inspection procedure

Each part or batch of mechanical parts shall be submitted to an incoming inspection. An incoming inspection procedure shall be established defining the inspections and tests to be carried out.

7.7 Use of mechanical parts

7.7.1 Qualification status of mechanical parts

The supplier shall ensure that all critical parts are qualified before being used in the manufacture of qualification or flight products. Any modification, change in condition or configuration of application shall lead to a re-evaluation in conformance with the process shown in [Figure 1](#).

7.7.2 Traceability of mechanical parts

The supplier shall apply the traceability rules in accordance with ISO 27025 to his or her mechanical parts. Parts shall be identified by a unique reference number or code and a lot number to provide traceability when there is an incident or non-conformance, or for the purposes of technical investigations following failure or damage to reconstruct the mechanical part's history, either individually (individual traceability) or by the manufacturing lot it was part of (lot traceability).

7.7.3 Packaging, storage, removal from storage

The supplier shall define provisions for packaging, storage and removal from storage for mechanical parts.

Measurements and inspections used to guarantee the part integrity and monitoring during storage and removal from storage shall be identified.

7.7.4 Limited-life mechanical parts or parts subject to wearout

Limited-life mechanical parts after implementation or those subject to wear out, e.g. mechanisms, pyro initiators and O-rings, shall be identified and controlled, including storage and mission life. These parts shall be assessed as candidates to the critical items list; see ISO 27025.

7.7.5 Mechanical parts non-conformances and alerts

Management of mechanical parts' non-conformances and alerts shall be in conformance with ISO 27025 and ISO 23461.

8 Process control

8.1 Specifications or procedures

Each process being used in the manufacturing or assembly of a product shall be identified by a specification or procedure. Reference shall be made to accept and reject criteria.

8.2 Process selection and training

8.2.1 Processes shall be chosen from already verified processes according to the following order of preference and priority:

- processes covered by space agencies or other governmental organization certification for identical conditions of use;
- processes for which satisfactory evaluation and verification results are obtained on samples representative of the application with a sufficient margin as regards conditions of use; and

- processes already used by the same supplier for other space programmes in the same conditions of use.

8.2.2 Whether the processes are already verified or remain to be verified, their selection shall ensure that the following criteria are met:

- quality and reliability;
- inspectability;
- re-workability of the process item; and
- reproducibility.

8.2.3 The supplier shall store and maintain all processes data in an internal database. The access to the data shall be granted to the customer.

8.2.4 Processes using limited-life materials shall be in conformance with the requirements from ISO 27025.

8.2.5 Operators shall be trained for all processes. Operators performing special processes shall be competent for the activities they perform. Inspectors shall be competent to work on all processes.

8.2.6 Retraining of operators shall be applied in the event of a new process, modification to an existing process or a change of the equipment used. Retraining of inspectors shall be applied in the event of a new inspection procedure, modification to an existing inspection procedure or a change of an existing one. In the case of a process suspension for specified months (ex: 4 months or 6 months) continuously, retraining shall be performed.

8.2.7 Standards relating to the occupational health of operators working with processes resulting in exposure to vapours, dust or debris shall be implemented and controlled.

8.3 Declared processes list content

The declared processes list (DPL) shall be broken down into clear categories to facilitate locating each item in the documentation (a breakdown is given in the DPL DRD). For additional information, see [Annex D](#).

The DPL format shall include the following information:

- item number (as the reference of the process in the DPL); it shall be the same throughout the duration of the project;
- process identification;
- process specification (including specification issue, revision or date);
- process description (with associated materials' designation if possible);
- use and location;
- process supplier;
- associated DML item numbers; and
- approval status (with reference to the approval authority, to the test report and similar previous applications).

Any coding or acronyms used within the list shall be defined within the document. An example of a suitable DPL format is given in the DPL DRD. For additional information, see [Annex D](#).

8.4 Criticality analysis

The objective of the analysis is to identify whether further data are required to conform to mission requirements.

- a) The supplier shall analyse all the processes contained in their preliminary lists with respect to criticality and in correlation with the risk analyses performed.
- b) Critical processes shall be identified in the DPL and included in the list of critical items.
- c) Any critical process shall be the subject of an RFA submitted to customer approval, see [Annex E](#) and [5.2.2](#).
- d) Special processes can be identified and controlled. Process control shall be ensured by means of procedures available for customer review.

NOTE Best practice is to implement a statistical process control.

8.5 Evaluation and verification phase

8.5.1 General

Depending on the results of the criticality analysis, the supplier shall perform an evaluation phase before the verification phases for all critical processes which are new or with major change in the use or in the configuration. In case of an extension of an existing application, the evaluation need not be performed if so agreed with the customer.

For confidential processes, the supplier shall prove that the process has been verified, e.g. by presenting a verification certificate from space agencies or other governmental organization that shall check the applicability of this verification.

NOTE Reference can be made to [Table 1](#) for an explanation of the steps involved.

8.5.2 Evaluation phase

The evaluation shall include the following as a minimum for each critical process:

- the limits of use;
- the values, determined by test samples or technology samples, of relevant parameters and their tolerances; and
- acceptance criteria.

When an evaluation is performed, the supplier shall provide an evaluation programme at PDR, and an evaluation report before CDR, in accordance with [Figures 1](#) and [2](#) and [Table 1](#).

8.5.3 Verification phase

For each critical process, the supplier shall implement a verification programme. The verification programme shall be defined in conformance with existing national agency standards of verification. The supplier shall ensure that mission requirements and that the parameters needed for the product design are defined so as to obtain verification status. Verification status shall be decided at CDR in review of available results written in verification report and the review of corresponding documentation. The verification programme and report shall be approved by the customer.

8.5.4 Approval phase

A process shall not receive an approval identification in the declared processes list unless requirements from [8.6.2](#) and [8.6.3](#) are satisfied.

In case approval is not granted, the supplier in charge of the item shall either:

- select other processes; or
- propose a modified evaluation programme and resubmit for approval; or
- if the above actions fail to achieve positive results, initiate a deviation procedure.

8.5.5 Deviation request

For processes not conforming to project requirements, whether at the end of criticality analysis or of evaluation and verification tests, the supplier shall submit a deviation request, in accordance with ISO 27025.

8.6 Use of a process

8.6.1 Verification status of a process

The supplier shall confirm that all critical processes have been verified before being used in the manufacture of qualification or flight products. Any modification change in condition or configuration of application shall lead to a re-evaluation in conformance with process.

8.6.2 Re-verification of a process

Any prolonged stoppage in manufacturing, any major change of the facilities or procedures or any transfer of production to another entity can invalidate partially or completely the initial verification of a process.

When a process needs to be re-verified, a request for approval (RFA) in conformance with DRD form from [Annex E](#) shall be established and a re-verification programme shall be implemented.

8.6.3 Implementation of a process

Before implementation of a process, the supplier shall ensure that personnel are trained in accordance with the training and competency evaluation programme and that environment, means and documentation are adequate.

This verification shall ensure that:

- the manufacturing and quality control tools associated with the process are adequate, calibrated and properly maintained and are used under appropriate environmental and cleanliness conditions; see [5.4](#);
- the personnel is trained and has reached the competency levels required by the training programme;
- the process's specifications, manufacturing and inspection procedures and workmanship standards including definition of manufacturing operations and clear acceptance criteria exist; and
- visual acceptance criteria are photographically documented, if possible, at the appropriate work and inspection stations.

For planning of manufacturing, assembly and integration operation and inspection, see ISO 27025.

8.6.4 Traceability of processes

Traceability of processes shall be ensured in conformance with ISO 27025.

8.6.5 Process non-conformances and alerts

Non-conformances and alerts shall be processed in conformance with ISO 27025.

8.6.6 Mandatory inspection points (MIPs)

MIPs shall be defined in conformance with ISO 27025.

8.6.7 Packaging, storage, removal from storage

The supplier shall define provisions for packaging, storage, and removal from storage for products or semi-finished products before and after implementation of processes.

STANDARDSISO.COM : Click to view the full PDF of ISO 10794:2018

Annex A (informative)

Relationship between materials, mechanical parts, processes activities and programme phase

A.1 Feasibility phase — Phase A

In phase A, the materials, mechanical parts and processes product assurance tasks shall be carried out in order to:

- a) identify main programme constraints on materials, mechanical parts and processes;
- b) define the policy; and
- c) plan the product assurance tasks for the project definition phase.

A.2 Preliminary definition phase — Phase B

In phase B, the materials, mechanical parts and processes product assurance tasks shall be carried out in order to:

- a) define or identify requirements;
- b) identify main new items needed and plan corresponding necessary actions for phase C;
- c) plan the product assurance tasks for the detailed design, development, manufacturing, integration and test phase and prepare the materials, mechanical parts and processes plan as part of the PA plan; and
- d) support preliminary design review.

A.3 Detailed definition and production phase — Phase C or D

In phase C or D, the materials, mechanical parts and processes product assurance tasks shall be carried out in order to:

- a) identify materials, mechanical parts and processes;
- b) issue preliminary lists;
- c) identify critical items;
- d) establish or review an RFA;
- e) support mandatory inspection points identification;
- f) establish evaluation programme, perform test or review test results;
- g) establish validation, qualification, or verification programmes (e.g. perform tests or review test results);
- h) support non-conformance processing (NRB, failure review board);
- i) establish the as-designed lists;

- j) support the critical design review;
- k) support the qualification review;
- l) establish the final as-designed (updated) lists;
- m) support release of manufacture of flight hardware; and
- n) Support final acceptance review.

A.4 Utilization phase — Phase E

In phase E, the materials, mechanical parts and processes product assurance tasks shall be carried out in order to:

- a) support the series manufacturing of recurring products;
- b) support the investigation of operational phase anomalies; and
- c) update the as-flown materials lists to incorporate the new materials that can have been added or changed as a result of NCR activities. In particular, the PMP lists should include the actual materials flown on manned and reusable spacecraft and their payloads.

STANDARDSISO.COM : Click to view the full PDF of ISO 10794:2018

Annex B (normative)

Declared materials list — Document requirements definition

B.1 DRD identification

B.1.1 Requirement identification and source document

This DRD is provided in this document ([5.2.3](#) and [6.3](#)).

B.1.2 Purposes and objective

The purpose of the DML is to have a detailed record of all the materials used to produce the products of a project or programme.

The data in the DML shall make possible to assess whether the materials are suitable for a specific application, at the supplier and the customer levels (in the approval status column).

The DML is prepared for each “configuration item” at the relevant stages (e.g. at the start, PDR, CDR and QRR) as defined in the flow chart given in [Figures 1](#) and [2](#).

The following documents are linked to the DML:

- declared processes list (DPL); and
- request for approval (RFA) materials.

B.2 Expected response

B.2.1 Scope and content

a) Materials groups:

- 1) The DML shall contain the following statements:
 - “Materials are classified into 20 groups depending on their type or their main use; see [Table B.1](#).”
 - “Primers are classified in the group of their associated component.”
 - “Where no project requirement exists for a separate DMPL, mechanical parts are entered on the DML as a separate group with the corresponding numbers.”
- 2) If new groups are created, for a given project, these shall have numbers over 21.

Table B.1 — Material group numbers

Group number	Description
1	Aluminium and aluminium alloys
2	Copper and copper alloys
3	Nickel and nickel alloys
4	Titanium and titanium alloys

Table B.1 (continued)

Group number	Description
5	Steels
6	Stainless steels
7	Filler metals: welding, brazing soldering
8	Miscellaneous metallic materials
9	Optical materials
10	Adhesives, coatings, varnishes
11	Adhesive tapes
12	Paints and inks
13	Lubricants
14	Potting compounds, sealants, foams
15	Reinforced plastics [including printed circuit boards (PCBs)]
16	Rubbers and elastomers
17	Thermoplastics (e.g. non-adhesive tapes and foils [MLI])
18	Thermoset plastics (including PCBs)
19	Material aspects of wires and cables
20	Miscellaneous non-metallic materials, e.g. ceramics

b) Contents of the DML

The DML shall include the information stated in [Table B.4](#), where the header information identifies the list as the declared materials list and includes the issue number and date of issue, as follows:

NOTE If heritage is used as justification for approval, it covers the current hardware configuration and mission profile.

1) Item number (applicable to equipment manufacture level only)

This consists of the material group identifier and the user code. It takes the form of: <group number>. <identifier within the group>. <running number>. <user code>

EXAMPLE 11.5.1.KOF.

Characteristics of the item number are the following.

- The user shall be identified by an agreed user code for the project.
- One per material type.
- Does not change during the life of the materials list (sub-items are permitted when deemed necessary).

2) Commercial identification or standardized designation

Enter the correct and standard designation such as the trade name and the number.

If no trade name exists, enter the manufacturer's name and the number.

For metal alloys, the Aluminium Association (AA) system is recommended for aluminium alloys, and the American Iron and Steel Institute (AISI) system for steel. For other metals or alloys, the main constituent is entered first except in the case of a traditional name (e.g. brass or bronze).

For each material, as designated above, use a unique item number. If several lines are used for different applications or processing, add sub-item numbers.

3) Chemical nature and product type

For metallic materials, add the condition as procured (e.g. rolled and heat treatment), if applicable. Where a semi-finished product is procured, give the relevant state (e.g. form, plate and sheet).

Give the thickness of the material, that can be an important parameter (e.g. epoxy resin, polyurethane adhesive, Ti6Al4V).

4) Procurement information

Manufacturer or distributor: name of the manufacture and name of the distributor if different.

Procurement specification: provide reference to one of the following:

- the procurement specification with issue, revision and date;
- a national or international specification or standard, if this exists, and identifies the source of procurement (if relevant), with issue, revision and date; and
- datasheet, in which case indication of issue or date is not applicable.

5) Processing parameters

A summary of the process parameters applied by the user of the process shall be listed, e.g. mixture proportions, cure temperature, special cleaning agent, surface treatment, thermal treatment and temperature, and reference to specification number.

6) Use and location

The codes entered shall define the location of the material with respect to:

- the subsystem;
- the particular piece of equipment (box or item); and
- the use of the equipment, e.g. a structural element, thermal control, electrical insulation.

If the CI number is not included in the list header, then a suitable abbreviation of the relevant subsystem is included.

Any restrictions that apply to the use of a particular material shall be included in the corresponding comment column.

7) Environmental code

The environmental code is defined in accordance with [Table B.2](#).

Table B.2 — Environmental code

Environmental code			
Radiation/UV/ATOX (R) ^a		Ambience (A)	Temperature (T) ^{b,c}
G: Geostationary	S: Outside shadow	V: Vacuum	1: 0 to 100 K
L: Low orbit	L: Outside light	H: Hermetic	2: 101 to 200 K
B: Radiation belt		M: Manned	3: 201 to 300 K

Table B.2 (continued)

Environmental code		
Radiation/UV/ATOX (R) ^a	Ambience (A)	Temperature (T) ^{b,c}
I: Interplanetary P: Planetary	E: Elevated pressure	...
<p>^a For all materials, a letter is selected from the left-hand column. For materials on the surface of the spacecraft, the letter "L" or "S" is added.</p> <p>^b Thermal cycling to be indicated by two values, e.g. 3/5.</p> <p>^c "RT" (room temperature) can be accepted as a code between 283 K (10 °C) and 313 K (40 °C). Materials that are at a boundary between environments shall be described by two sets of codes.</p>		

8) Size code

The size code is indicated by an alphanumeric combination, such as A5, V2 or M3 as shown in [Table B.3](#).

Table B.3 — Size code

Size code	Value
0	$0 < A \text{ or } V \text{ or } M \leq 1$
1	$1 < A \text{ or } V \text{ or } M \leq 10$
2	$10 < A \text{ or } V \text{ or } M \leq 100$
3	$100 < A \text{ or } V \text{ or } M \leq 1\ 000$
4	...
where <i>A</i> is the area, expressed in square centimetres; <i>V</i> is the volume, expressed in cubic centimetres; <i>M</i> is the mass, expressed in grams.	

9) Validation references, justification for approval and prime comments

Reference shall be made to relevant test data that demonstrate the acceptability of the material under the environmental conditions and the application relevant to the particular project concerned. Specifically, in column 9.1, corrosion (CORR), stress corrosion (SCC), flammability (FLAM), offgassing (OFFG) and outgassing (OUTG) data or report references are entered.

Standard abbreviations shall be used to summarize the acceptance status of a material for a particular property.

Column 9.2 is the justification for approval.

B.2.2 Special remarks

- The change record shall list the successive issues and their release dates since the first formal issue of the document.
- The change record shall include a brief description of the updates which contributed to each issue or revision.

NOTE [Table B.1](#) of this DRD proposes an example of the format and defines the content within the framework of a project or a programme.

Table B.4 — Example of a realized DML

Declared materials list DML								
Programme name: ABCDEFG		CI no.: 1234567890		Doc no. 001		Date: 01.10.2000		
Group (Title): abcdefg		Issue/Revision: 1/4		Page: 1				
1	2	3	4	5	6	7	8	9
Item no. and user code	Commercial identification or standardized designation	1) Chemical nature 2) Product type	1) Manufacturer/supplier name 2) Procurement spec. Issue/RevDate	1) Summary of process parameters 2) Applicable process identification	1) Subsystem 2) Equipment 3) Use	1) R 2) A 3) T	1) A 2) V 3) M	9.1 9.2
1.2.1.TXES	AZ5GU	1) Al,Zn5.6 Mg2.5 Cdu1.6, Cr0.3 eq. AA7075 2) Plate	1) Almet Pechiney 2) CRB 527 01/02/ 01.02.1996	1) T7351 and Iridium heat treatment 2)	1) PL 2) E4 package 3) Structure	1) LS 2) V 3) 3	1) 1) 2) 2) 3) M3	Acronym/rating/ Validation Ref. for applicable properties 1) Justification for approval 2) Prime comments
10.1.1.ETCA	DC93500	1) Silicon 2) Two parts	1) Dow Corning 2) E384-6MC10S 02/02/1984	1) Mixture: 10/1 in g Curing: 4 h/65 °C 2)	1) PCU 2) Experiment tray 3) Part potting	1) G 2) V 3) 3-4	1) 1) 2) 2) 3) M3	1) ECSS-Q-70-01 2)
11.5.1.KOF	ECCOFOAM EPH	1) Polyurethane 2) Resin/Catalyst 1202H	1) Emerson and Cuming 2) SP/FOK/05/684 03/01/ 25.06.1992	1) Resin/Cat: 100/65g 4h/40 °C +48h/100 °C 2)	1) GP 2) Platform 3) Package potting	1) LS 2) M 3) 3-4	1) 1) 2) V3 3) 3-4	1) DU-96-352 2) Used at T > 100 °C (Risk of distortion beyond)

Annex C (normative)

Declared mechanical parts list — Document requirements definition

C.1 DRD identification

C.1.1 Requirement identification and source document

This DRD is provided in this document ([5.2.3](#) and [7.3](#)).

C.1.2 Purposes and objective

The purpose of the DMPL is to have a detailed record of all the mechanical parts used to produce the products of a project or programme.

The data in the DMPL shall make possible to assess whether the mechanical parts are suitable for a specific application, at the supplier and the customer levels (in the approval status column).

The DMPL is prepared for each “configuration item” at the relevant stages (e.g. at the start, PDR, CDR and QRR) as defined in the flow chart given in [Figures 1](#) and [2](#).

The following documents are linked to the DMPL:

- request for approval (RFA) materials.

C.2 Excepted response

C.2.1 Scope and content

a) Mechanical parts groups:

- 1) The DPML shall contain the following statements:
 - “Mechanical parts are classified into 11 groups depending on their type or their main use; see [Table C.1](#).”
- 2) If, for a given project it is considered necessary to create new groups, these shall have numbers over 61.
- 3) Items that appear in the EEE parts list should not be repeated here.

EXAMPLE 1 Heaters, some valves, thermostats, relays, transformer coils and solenoids.

Table C.1 — Mechanical part group numbers

Group number	Description
51	Spacing parts (e.g. washers and spacers)
52	Connecting parts (e.g. bolts, nuts, rivets, inserts and clips)
53	Bearing parts (e.g. ball-bearings and needle bearings)
54	Separating parts (e.g. pyrotechnics, springs and cutters)
55	Control parts (e.g. gears)
56	Fluid handling parts (e.g. diffusers)
57	Heating parts
58	Measuring instruments (e.g. gauges and thermocouples)
59	Optical passive equipment
60	Magnetic parts
61	Other parts

b) Contents of the DMPL

The DMPL shall include the information in [Table C.3](#) where the header information identifies the list as the declared mechanical parts list and includes the issue number and date of issue, as follows:

1) Item number (applicable at equipment supplier level only)

This consists of the mechanical part identifier and the user code. It takes the form of <group number>.<identifier within the group>.<running number>.<user code>

EXAMPLE 2 7.2.1.ACSA.

Characteristics of the item number are the following.

- The subcontractor shall be identified by an agreed user code for the project.
- There is only one item number per mechanical part type.
- The item number does not change during the life of the mechanical parts list.

2) Commercial identification

The correct and standard designation shall be entered such as the trade name plus number. If no trade name exists, then the manufacturer's name and number shall be entered.

3) Type of part

Material and surface treatment (if applicable) shall be described.

4) Procurement information

Name of the manufacturer and name of the distributor shall be given if different.

Reference of the procurement specification with issue, revision and date shall be given. It may be replaced by a national or international specification or standard if this exists and identifies the source of procurement if relevant with issue, revision and date.

5) Elementary function, main characteristics

The function of the mechanical part shall be entered.

The main characteristics of the mechanical part shall be entered.

EXAMPLE 3 Number of revolutions per minute for a ball-bearing.

6) Use and location

The codes entered shall define the location of the mechanical part with respect to:

- the subsystem;
- the particular piece of equipment (box or item); and
- the use of the equipment.

7) Environmental code

The environmental code is defined in accordance with [Table C.2](#).

Table C.2 — Environmental code

Environmental code			
Radiation/UV/ATOX (R) ^a		Ambience (A)	Temperature (T) ^{b,c}
G: Geostationary	S: Outside shadow	V: Vacuum	1: 0 to 100 K
L: Low orbit	L: Outside light	H: Hermetic	2: 101 to 200 K
B: Radiation belt		M: Manned	3: 201 to 300 K
I: Interplanetary		E: Elevated pressure	1/4
P: Planetary			
^a For all mechanical parts, a letter is selected from the left-hand column. For mechanical parts on the surface of the spacecraft, the letter "L" or "S" is added.			
^b Thermal cycling to be indicated by two values, e.g. 3/5.			
^c "RT" (room temperature) can be accepted as a code between 283 K (10 °C) and 313 K (40 °C).			

8) Criticality

Enter "C" for critical or "N" for non-critical. If a mechanical part is considered critical, the reason for the criticality and methods of control shall be entered.

9) Supplier reference and prime comments

The supplier reference and prime comments shall be used to enter all additional information that are necessary in order to obtain customer approval.

This information comprises reference and issue of the RFA or approval, mechanical parts justification file, evaluation reports and deviation requests.

Reference shall be made to the relevant test data that demonstrate acceptability of the mechanical part under the environment conditions and the application relevant to the particular project concerned.

Standard abbreviations shall be used to summarize the acceptance status of a mechanical part for a particular property. These shall be defined by the customer.

In order to justify the use of a material for flammability resistance, the material thickness and height of oxygen share shall be listed.

C.2.2 Special remarks

- a) The change record shall list the successive issues and their release dates since the first formal issue of the document.
- b) The change record shall include a brief description of the updates which contributed to each issue or revision.

NOTE [Table C.3](#) of this DRD proposes an example of the format and defines the content within the framework of a project or a programme.

STANDARDSISO.COM : Click to view the full PDF of ISO 10794:2018

Table C.3 — Example of realized DMPL

Declared mechanical parts list DMPL									
Programme name: ABCDEFG		CI no.: 1234567890		Doc no.: 001		Date: 01.10.2000		Page: 1	
Group (Title): abcdefg		Issue/Revision: 1/4		Issue/Revision: 1/4		Issue/Revision: 1/4		Page: 1	
1	2	3	4	5	6	7	8	9	
Item no. and user code	Commercial identification	Type of part	1) Procurement specification 2) Issue/Revision/Date	1) Elementary function 2) Main characteristics	1) Subsystem 2) Equipment 3) Use	1) R 2) A 3) T	1) Criticality 2) Reason and method of control	9.1 Supplier reference	9.2 Prime comments
51.2.1.ACSA	ESA003521000120	Copper/AL bimetal ring	1) AIEV 2) From catalogue	1) Separator ring 2) Heat conductor	1) TC 2) Plate interface 3) Spacing and heat inspection	1) G 2) V 3) 3-4	1) N 2)	Used on all projects	—
52.2.1.ASAD	A0090TX...XA	Ti6Al4V screws > M4	1) White area 2) ASNA0090 DSN2413	1) Assembly 2)	1) PTANK 2) plate 3) fixing	1) G 2) V 3) 3-4	1) N 2)	Used on TC2	—
60.1.1.ACSA	42908TC/F	Ferrite cores magnetic	1) Magnetics, Data sheet 2) SP/MAGN/003 01.02/03.06.1999	1) Coil core of transformer 2) Magnetic component	1) TC 2) South face 3) Heat regulation	1) G 2) V 3) 3-4	1) °C 2) to be qualified	—	—