

---

---

**Road vehicles — Vehicle to grid  
communication interface —**

**Part 9:  
Physical and data link layer  
conformance test for wireless  
communication**

*Véhicules routiers — Interface de communication entre véhicule et  
réseau électrique —*

*Partie 9: Essai de conformité relatif à la couche physique et à la  
couche liaison de données pour la communication sans-fil*

STANDARDSISO.COM : Click to view the full PDF of ISO 15118-9:2022



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2022

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11  
Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

	Page
Foreword.....	iv
Introduction.....	v
<b>1 Scope.....</b>	<b>1</b>
<b>2 Normative references.....</b>	<b>1</b>
<b>3 Terms and definitions.....</b>	<b>2</b>
<b>4 Abbreviated terms.....</b>	<b>6</b>
<b>5 Conventions.....</b>	<b>7</b>
5.1 Requirement structure.....	7
5.2 Test system description.....	8
<b>6 Test architecture reference model.....</b>	<b>8</b>
6.1 General information.....	8
6.2 Platform adapter interface.....	8
6.3 SUT adapter interfaces.....	9
6.4 Codecs.....	9
<b>7 Test suite conventions.....</b>	<b>10</b>
7.1 General information.....	10
7.2 Test suite structure (TSS).....	10
7.3 Test profiles.....	11
7.3.1 Test configurations.....	12
7.3.2 Components and ports.....	12
7.3.3 Protocol implementation conformance statement (PICS) definition.....	14
7.3.4 Protocol implementation extra information for testing (PIXIT) definition.....	14
7.3.5 Test control.....	15
7.4 Test suite identifiers.....	15
7.4.1 Module identifiers.....	15
7.4.2 Test case identifiers.....	16
7.4.3 Template identifiers.....	16
7.4.4 Function identifiers.....	17
7.4.5 Timer identifiers.....	18
7.4.6 PICS/PIXIT identifiers.....	18
7.4.7 Verdict identifiers.....	19
7.5 Test suite coverage.....	19
7.6 Test case description.....	22
<b>8 Test case descriptions for ISO 15118-8 requirements.....</b>	<b>23</b>
8.1 General information.....	23
8.2 SECC test cases.....	23
8.3 EVCC test cases.....	43
<b>Bibliography.....</b>	<b>72</b>

## Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives) or [www.iec.ch/members\\_experts/refdocs](http://www.iec.ch/members_experts/refdocs)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)) or the IEC list of patent declarations received (see <https://patents.iec.ch>).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html). In the IEC, see [www.iec.ch/understanding-standards](http://www.iec.ch/understanding-standards).

This document was prepared jointly by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 31, *Data communication*, and Technical Committee IEC/TC 69, *Electrical power/energy transfer systems for electrically propelled road vehicles and industrial trucks*.

A list of all parts in the ISO 15118 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html) and [www.iec.ch/national-committees](http://www.iec.ch/national-committees).

## Introduction

Resulting from the wireless physical and data link layer requirements defined in ISO 15118-8, a corresponding set of abstract test cases is necessary to verify the conformance of implementations. This document, therefore, defines a conformance test suite for the wireless physical and data link layer protocols in order to derive a common and agreed basis for conformance tests. The resulting test suite is a prerequisite for downstream interoperability tests. Since interoperability furthermore involves the actual application logic of an implementation, those tests are beyond the scope of this document. Hence, this document focuses on the interface aspects and the corresponding requirements given in ISO 15118-8 only.

STANDARDSISO.COM : Click to view the full PDF of ISO 15118-9:2022

STANDARDSISO.COM : Click to view the full PDF of ISO 15118-9:2022

# Road vehicles — Vehicle to grid communication interface —

## Part 9:

## Physical and data link layer conformance test for wireless communication

### 1 Scope

This document specifies conformance tests in the form of an abstract test suite (ATS) for a system under test (SUT) implementing an electric-vehicle or supply-equipment communication controller (EVCC or SECC) with support for WLAN-based high-level communication (HLC) according to ISO 15118-8 and against the background of ISO 15118-1. These conformance tests specify the testing of capabilities and behaviours of an SUT, as well as checking what is observed against the conformance requirements specified in ISO 15118-8 and against what the implementer states the SUT implementation's capabilities are.

The capability tests within the ATS check that the observable capabilities of the SUT are in accordance with the static conformance requirements defined in ISO 15118-8. The behaviour tests of the ATS examine an implementation as thoroughly as practical over the full range of dynamic conformance requirements defined in ISO 15118-8 and within the capabilities of the SUT (see NOTE below).

A test architecture is described in correspondence to the ATS. The abstract test cases in this document are described leveraging this test architecture and are specified in descriptive tabular format for the ISO/OSI physical and data link layers (layers 1 and 2).

In terms of coverage, this document only covers normative sections and requirements in ISO 15118-8. This document can additionally refer to specific tests for requirements on referenced standards (e.g. IEEE, or industry consortia standards, like WiFi Alliance) as long as they are relevant in terms of conformance for implementations according to ISO 15118-8. However, it is explicitly not intended to widen the scope of this conformance specification to such external standards, if it is not technically necessary for the purpose of conformance testing for ISO 15118-8. Furthermore, the conformance tests specified in this document do not include the assessment of performance nor robustness or reliability of an implementation. They cannot provide judgments on the physical realization of abstract service primitives, how a system is implemented, how it provides any requested service, nor the environment of the protocol implementation. Furthermore, the abstract test cases defined in this document only consider the communication protocol and the system's behaviour defined ISO 15118-8. The power flow between the EVSE and the EV is not considered.

**NOTE** Practical limitations make it impossible to define an exhaustive test suite, and economic considerations can restrict testing even further. Hence, the purpose of this document is to increase the probability that different implementations are able to interwork. This is achieved by verifying them by means of a protocol test suite, thereby increasing the confidence that each implementation conforms to the protocol specification. However, the specified protocol test suite cannot guarantee conformance to the specification since it detects errors rather than their absence. Thus, conformance to a test suite alone cannot guarantee interworking. Instead, it gives confidence that an implementation has the required capabilities and that its behaviour conforms consistently in representative instances of communication.

### 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 15118-1, *Road vehicles — Vehicle to grid communication interface — Part 1: General information and use-case definition*

ISO 15118-2, *Road vehicles — Vehicle-to-Grid Communication Interface — Part 2: Network and application protocol requirements*

ISO 15118-8:2020, *Road vehicles — Vehicle to grid communication interface — Part 8: Physical layer and data link layer requirements for wireless communication*

ISO 15118-20, *Road vehicles — Vehicle to grid communication interface — Part 20: 2nd generation network layer and application layer requirements*

ETSI ES 201 873-5 V4.9.1<sup>1)</sup>, *Methods for Testing and Specification (MTS) — The Testing and Test Control Notation version 3 — Part 5: TTCN-3 Runtime Interface (TRI) (April 2022)*

ETSI ES 201 873-6 V4.13.1<sup>2)</sup>, *Methods for Testing and Specification (MTS) — The Testing and Test Control Notation version 3 — Part 6: TTCN-3 Control Interface (TCI) (April 2022)*

IEEE 802.11-2012, *IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — specific requirements: Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications*

### 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 15118-1, ISO 15118-2, ISO 15118-8, ISO 15118-20 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

#### 3.1

##### **abstract test case**

complete and independent specification of the actions required to achieve a specific *test purpose* (3.25), defined at the level of abstraction of a particular abstract test method, starting in a stable testing state and ending in a stable testing state and optionally involves one or more consecutive or concurrent connections

Note 1 to entry: The specification should be complete in the sense that it is sufficient to enable a *test verdict* (3.29) to be assigned unambiguously to each potentially observable test outcome (i.e. sequence of test events).

Note 2 to entry: The specification should be independent in the sense that it should be possible to execute the derived *executable test case* (3.7) in isolation from other such test cases (i.e. the specification should always include the possibility of starting and finishing in the 'idle' state).

[SOURCE: ITU-T X.290:1995, 3.3.3].

#### 3.2

##### **ATS**

abstract test suite

test suite composed of *abstract test cases* (3.1)

[SOURCE: ITU-T X.290:1995, 3.3.6]

---

1) Available at [https://www.etsi.org/deliver/etsi\\_es/201800\\_201899/20187305/04.09.01\\_60/es\\_20187305v040901p.pdf](https://www.etsi.org/deliver/etsi_es/201800_201899/20187305/04.09.01_60/es_20187305v040901p.pdf).

2) Available at [https://www.etsi.org/deliver/etsi\\_es/201800\\_201899/20187306/04.13.01\\_60/es\\_20187306v041301p.pdf](https://www.etsi.org/deliver/etsi_es/201800_201899/20187306/04.13.01_60/es_20187306v041301p.pdf).



### 3.3

#### **APUT**

access point under test

ISO/OSI layer 1 and 2 component of the SECC [*system under test (SUT)* (3.19)] for establishing a wireless communication connection

### 3.4

#### **black box test**

method of testing that examines the behaviour of a *system under test (SUT)* (3.19) without considering the internal implementation and structure of the SUT, thus relying on the SUT's open interface for testing

### 3.5

#### **conformance requirement**

conformance of a real system consisting of conformance to each requirement and conformance to the set

Note 1 to entry: Set of interrelated requirements which together define the behaviour of the system and its communication. Conformance of a real system will, therefore, be expressed at two levels, conformance to each individual requirement and conformance to the set. Applicable conformance tests defined in this document, include requirements and transfer syntax requirements as far as they can be validated by *black box tests* (3.4).

Note 2 to entry: See also *static conformance requirement* (3.17) and *dynamic conformance requirement* (3.6).

### 3.6

#### **dynamic conformance requirement**

one of the requirements which specifies what observable behaviour is permitted by the relevant specification(s) in instances of communication

Note 1 to entry: The requirements for this conformance specification are defined in ISO 15118-8.

[SOURCE: ITU-T X.290:1995, 3.3.29, modified — Note 1 to entry has been added.]

### 3.7

#### **executable test case**

realization of an *abstract test case* (3.1)

[SOURCE: ITU-T X.290:1995, 3.3.31]

### 3.8

#### **expected behaviour**

exact response of the *system under test (SUT)* (3.19) according to the underlying protocol specification to the stimulus defined in the *test behaviour* (3.20)

### 3.9

#### **ICS**

implementation conformance statement

statement made by the supplier of an implementation or system claimed to conform to a given specification, stating which capabilities have been implemented

Note 1 to entry: The given specification for this conformance specification is ISO 15118-8.

[SOURCE: ITU-T X.290:1995, 3.3.39, modified — "The ICS can take several forms: protocol ICS, profile ICS, profile specific ICS, and information object ICS." has been removed from the definition and Note 1 to entry has been added.]

### 3.10

#### IXIT

implementation extra information for testing

statement made by a supplier or implementer of a *system under test (SUT)* (3.19) which contains or references all of the information [in addition to that given in the *implementation conformance statement (ICS)* (3.9)] related to the SUT and its testing environment, which will enable the test laboratory to run an appropriate test suite against the SUT

[SOURCE: ITU-T X.290:1995, 3.3.41, modified — "An IXIT can take several forms: protocol IXIT, profile IXIT, profile specific IXIT, and information object IXIT, TMP implementation statement." removed from the definition and IUT replaced by SUT.]

### 3.11

#### MTC

main test component

single *test component* (3.21) in a test component configuration responsible for creating and controlling *parallel test components* (3.12) and computing and assigning the *test verdict* (3.29)

[SOURCE: ITU-T X.292:2002, 3.6.43]

### 3.12

#### parallel test component

#### PTC

*test component* (3.21) created by the *main test component* (3.11)

[SOURCE: ITU-T X.292:2002, 3.6.53]

### 3.13

#### post-condition

test steps needed to define the path from the end of the *test behaviour* (3.20) up to the finishing stable state for the test case

### 3.14

#### pre-condition

test steps needed to define the path from the starting stable state of the test case up to the initial state from which the *test behaviour* (3.20) will start

### 3.15

#### PICS

protocol implementation conformance statement

*implementation conformance statement (ICS)* (3.9) for an implementation or system claimed to conform to a given protocol specification

Note 1 to entry: The given protocol specification for this conformance specification is ISO 15118-8.

[SOURCE: ITU-T X.290:1995, 3.3.80, modified — Note 1 to entry has been added.]

### 3.16

#### PIXIT

protocol implementation extra information for testing

*implementation extra information for testing (IXIT)* (3.10) related to testing for conformance to a given protocol specification

Note 1 to entry: The given protocol specification for this conformance specification is ISO 15118-8.

[SOURCE: ITU-T X.290:1995, 3.3.81, modified — Note 1 to entry has been added.]

**3.17****static conformance requirement**

one of the requirements that specify the limitations on the combinations of implemented capabilities permitted in a real open system which is claimed to conform to the relevant specification(s)

[SOURCE: ITU-T X.290:1995, 3.3.95]

**3.18****STAUT**

station under test

ISO/OSI layer 1 and 2 component of the EVCC [*system under test (SUT)* (3.19)] for establishing a wireless communication connection

**3.19****SUT**

system under test

real open system in which the implementation of one or more OSI protocols in an adjacent user/provider relationship are to be studied by testing.

Note 1 to entry: Adapted from ITU-T X.290:1995, 3.3.103 and 3.3.43.

**3.20****test behaviour**

set of test steps (test body) which are essential in order to achieve the *test purpose* (3.25) and assign verdicts to the possible outcomes

**3.21****test component**

named subdivision of a concurrent test case capable of being executed in parallel and declared as having a fixed number of points of control and observation and a fixed or maximal number of co-ordination points

[SOURCE: ITU-T X.292:2002, 3.6.72, modified — "in parallel with other test components" has been replaced by "in parallel".]

**3.22****TCI**

TTCN-3 control interfaces

four interfaces that define the interaction of the TTCN-3 Executable with the test management, the coding and decoding, the *test component* (3.21) handling and the logging in a *test system* (3.27)

[SOURCE: ETSI ES 201 873-6 V4.13.1:2022, 3.1]

**3.23****test execution**

interpretation or execution of an *abstract test suite* (3.2)

Note 1 to entry: Conceptually, the test execution can be decomposed into three interacting entities: an executable test suite, a *test framework* (3.24) and an optional internal encoding/decoding system entity.

**3.24****test framework**

entity to perform all actions of test cases or functions

Note 1 to entry: The test framework interacts with the test management, *system under test (SUT)* (3.19) adaptor and platform adaptor entities via *TTCN-3 control interfaces (TCI)* (3.22) and *test runtime interface (TRI)* (3.26) and additionally manages the executable test suite and encoding/decoding system entities. It initializes adaptors as well as executable test suite and encoding/decoding system entities. This entity performs all the actions necessary to properly start the execution of a test case or function with parameters in the executable test suite entity. It queries the test management entity for module parameter values required by the executable test suite and sends logging information to it. It also collects and resolves associated verdicts returned by the executable test suite entity.

Note 2 to entry: In this document, the TTCN-3 runtime system is used to explain a test framework functionality.

### 3.25

#### test purpose

prose description of a well-defined objective of testing, focusing on a single *conformance requirement* (3.5) or a set of related conformance requirements as specified in the appropriate OSI specification

EXAMPLE Verifying the support of a specific value of a specific parameter.

[SOURCE: ITU-T X.290:1995, 3.3.118]

### 3.26

#### TRI

test runtime interface

two interfaces that define the interaction of the TTCN-3 executable between the *system under test (SUT)* (3.19) and the platform adapter (PA) and the system adapter (SA) in a *test system* (3.27)

[SOURCE: ETSI ES 201 873-5 V4.9.1:2022, 3.1, modified — The term was originally TTCN-3 runtime interface.]

### 3.27

#### test system

real system combining the *test framework* (3.24), *abstract test suite* (3.2), *test execution* (3.23) and adapters as well as codecs

Note 1 to entry: Typically, also containing a common runtime environment based on an operating system.

### 3.28

#### TSI

test system interface

*test component* (3.21) that provides a mapping of the ports available in the (abstract) TTCN-3 *test system* (3.27) to those offered by a real test system

[SOURCE: ETSI ES 201 873-5 V4.9.1:2022, 3.1]

### 3.29

#### test verdict

statement of 'pass', 'fail' or 'inconclusive', as specified in an *abstract test case* (3.1), concerning conformance of a *system under test (SUT)* (3.19) with respect to that test case when it is executed

[SOURCE: ITU-T X.290:1995, 3.3.124, modified — IUT was replaced by SUT.]

## 4 Abbreviated terms

For the purposes of this document, the following abbreviated terms apply:

AP	(wireless) access point
APUT	access point under test
ATS	abstract test suite
EDCA	enhanced distributed channel access
ETSI	european telecommunications standards institute
EV	electric vehicle
EVCC	electric vehicle communication controller

EVSE	electric vehicle supply equipment
HAL	hardware abstraction layer
ICS	implementation conformance statement
ITB	invalid test behaviour
MAC	media access control
MTC	main test component
PICS	protocol implementation conformance statement
PIXIT	protocol implementation extra information for testing
PTC	parallel test component
SECC	supply equipment communication controller
STA	(wireless) station
STAUT	station under test
SUT	system under test
TC	test case
TCI	TTCN-3 control interface
TCI-CD	TCI-coding and decoding
TE	test execution
TRI	TTCN-3 runtime interface
TSI	TTCN-3 system interface
TSS	test suite structure
TTCN-3	testing and test control notation version 3
V2G	vehicle-to-grid
VTB	valid test behaviour

## 5 Conventions

### 5.1 Requirement structure

This document uses unique number identifiers for each individual requirement. This requirement structure allows for easier requirement tracking and management. The following format is used throughout this document:

'[V2G'Y'-'XXX']' requirement text

Where:

- 'V2G' represents the ISO 15118 series;
- Y represents the document part of the ISO 15118 series, for this document Y = 9;

- XXX represents the individual requirement number; and
- 'requirement text' includes the actual text of the requirement.

## 5.2 Test system description

TTCN-3 is used in this document to define/specify the test system architecture and test suite conventions, where applicable. TTCN-3 is, however, not mandatory for the implementation of a conformance test system according to this document.


**[V2G9-001]** The implementers of conformance tests shall verify that the test purposes implemented in their executable test cases are identical to the abstract test cases described in this document.

**NOTE** In this document, test cases are not programmatically specified in TTNC-3 core language. This will be revisited for the next edition of the document.

## 6 Test architecture reference model

### 6.1 General information

[Figure 1](#) provides an overview of the test architecture for this document. The following subclauses define the interface requirements for platform and SUT adapters (see [6.2](#), [6.3](#)) as well as the codecs (see [6.4](#)). The test suite is defined in detail in the remainder of this document.

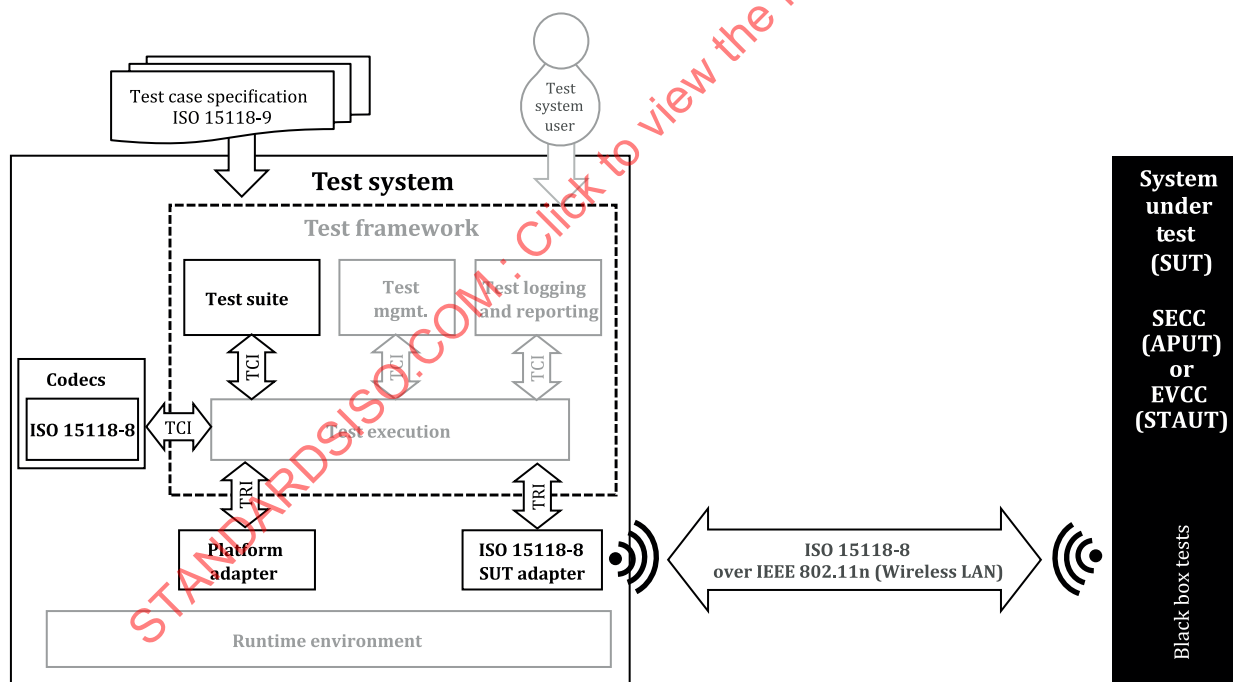

**Figure 1 — Test architecture reference model**

### 6.2 Platform adapter interface

The platform adapter within the test system is responsible for timers and external functions. Besides means for timers, which are typically provided as part of the test framework, no external functions are defined for this document.

- [V2G9-002]** The platform adapter of the test system shall implement the TriPlatformPA and the TriPlatformTE interfaces as defined in ETSI ES 201 873-5 V4.9.1:2022, 6.5.3.

### 6.3 SUT adapter interfaces

The SUT adapter within the test system adapts the TTCN-3 communication operations to the SUT based on an abstract test system interface and implements the real test system interface. It is responsible of propagating message requests and procedure-based calls from the test execution (see [Figure 1](#)) to the SUT, and of notifying the test execution of any received test events by appending them to its port queues.

- [V2G9-003]** Any SUT adapter of the test system shall implement the TriCommunicationSA and the TriCommunicationTE interfaces as defined in ETSI ES 201 873-5 V4.9.1:2022, 6.5.2.

NOTE 1 The actual implementation of these adapters is out of scope of this document.

- [V2G9-004]** The ISO 15118-8 SUT adapter of the test system shall send/receive the encoded MAC frame format to/from the SUT as defined in IEEE 802.11-2012, section 8.

NOTE 2 For association support according to ISO 15118-8 the management frames according to IEEE 802.11-2012, section 8.3.3 are used and embedded in the frame body field of the MAC frame format.

- [V2G9-005]** The wireless communication module of the ISO 15118-8 SUT adapter of the test system shall be certified by WiFi Alliance ('Wi-Fi CERTIFIED n').

The majority of requirements in ISO 15118-8 are based on IEEE 802.11n. WiFi Alliance certification is therefore required for the ISO 15118-8 SUT adapter in order to ensure the test system complies with IEEE 802.11n.

- [V2G9-006]** In case SUT is a STAUT, the ISO 15118-8 SUT adapter of the test system shall support operation at both the 2,4 GHz and 5 GHz frequency bands in parallel (simultaneous dual band support).

- [V2G9-007]** The wireless communication module of the ISO 15118-8 SUT adapter of the test system shall at least support all allowed channels per frequency band that are applicable for the SUT according to ISO 15118-8:2020, Tables 1, 2, and Annex D.

NOTE 3 Depending on the target market of the SUT, not all the channels listed in ISO 15118-8:2020, Tables 1 and 2 are allowed to be used due to national regulation.

NOTE 4 A collection of national regulations in usage of the U-NII band channels is listed in ISO 15118-8:2020, Annex D.

- [V2G9-008]** The ISO 15118-8 SUT adapter of the test system shall support active and passive scanning procedure according to IEEE 802.11-2012.

### 6.4 Codecs

A codec is responsible for the external encoding and decoding of TTCN-3 values into bit strings suitable to be sent to the SUT. The test execution (TE) determines which codec shall be used and passes the TTCN-3 data to the appropriate encoder to obtain the encoded data. Received data is decoded in this entity by using the appropriate decoder, which translates the received data into TTCN-3 values cf. ETSI ES 201 873-5 that can be matched against expected values or templates.

- [V2G9-009]** All codecs in this document shall implement the TCI-CD interface as defined in ETSI ES 201 873-6 V4.13.1:2022, 7.3.2.

NOTE 1 For conformance testing in this document, the IEEE 802.11n codec (see [Figure 1](#)) is used to encode or decode messages consumable by the tester into bit strings consumable by the SUT.

NOTE 2 The exact implementation of the IEEE 802.11n codec is out of scope of this document.

**[V2G9-010]** The ISO 15118-8 codec shall encode message values of the test system into corresponding MAC frames consumable by the SUT as defined in ISO 15118-8:2020, 7.2.6 and 7.3.5 and IEEE 802.11-2012.

**[V2G9-011]** The ISO 15118-8 codec shall decode MAC frames as defined in ISO 15118-8:2020, 7.2.6 and 7.3.5 and IEEE 802.11-2012 into message values consumable by the test system.

## 7 Test suite conventions

### 7.1 General information


This clause defines all conventions that are relevant for conformance tests of SUTs implementing ISO 15118-8.

### 7.2 Test suite structure (TSS)

A test suite is a complete set of test cases, possibly combined into groups or modules, that are necessary to perform conformance testing for a given SUT.

Each executable test case stimulates the SUT with specific inputs and the reactions are observed and evaluated. Depending on the test purpose different pre-conditions and post-conditions shall be considered for the formulation of the test behaviour. The pre-conditions, post-conditions as well as test behaviours are encapsulated into individual functions and stored within separate modules. Thus, a complete test case is composed by the actual test behaviour enveloped by pre- and post-conditions. The corresponding grouping of functions can therefore be assigned to the lowest abstract hierarchical level (see [Figure 2](#)). The test cases are defined on the second level.



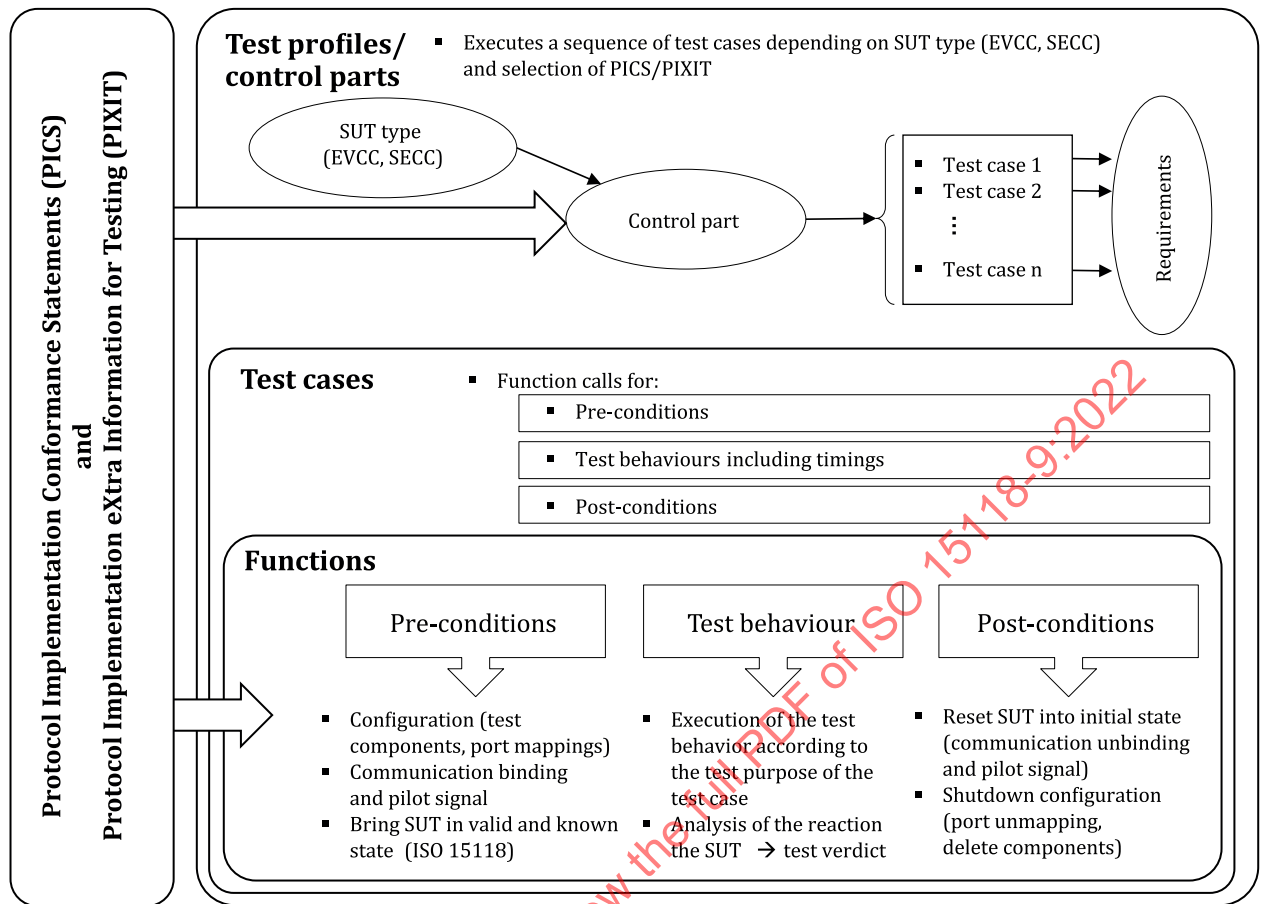

**Figure 2 — General overview of the test suite structure (TSS)**

The test profile is a collection of self-contained test cases as well as PICS (see 7.3.3) and PIXIT (see 7.3.4) in order to represent a given use case. The selection is based on the use cases of the ISO 15118 series and its corresponding requirements.

Hence, the test suite structure (TSS) is segmented into subgroups defined according to ISO 15118 use cases for conformance testing. Table 1 shows these subgroups, which are used for the organization of the test case specifications as well as for the test suite identifiers (see 7.4 for detail).

**Table 1 — Identifiers within the test suite structure (TSS)**

Identifiers	Values	Description
<sut>		System under test
	EVCC	Electric vehicle communication controller
	SECC	Supply equipment communication controller
<ctx>	{fullname}	Context (e.g. name of message pattern signal name according to standard)

### 7.3 Test profiles

This subclause defines test profiles for conformance with ISO 15118-8. A test profile consists of a test configuration as well as a selection and assignment of PICS/PIXIT. Depending on the test configuration a set of test components and ports are defined. The test profile furthermore includes a test group defining the set of relevant test cases and the sequence in which they are executed in order to perform a conformance test for a given use case.

### 7.3.1 Test configurations

The test configuration reflects various ISO 15118 scenarios. The main entities for the system under test (SUT) are:


- electric vehicle communication controller (EVCC),
- supply equipment communication controller (SECC).

The combination of entities and additionally used test components are grouped by test configuration IDs (CF\_Part\_ID). [Table 2](#) shows the test configurations for this document.


**Table 2 — Test configurations**

CF_Part_ID	SUT	Tester	PTCs
CF_09_001	SECC including wireless LAN interface	EVCC with ISO 15118-8 SUT adapter	none
CF_09_002	EVCC including wireless LAN interface	SECC with ISO 15118-8 SUT adapter	none

[Figure 3](#) and [Figure 4](#) illustrate configurations as defined in [Table 2](#).

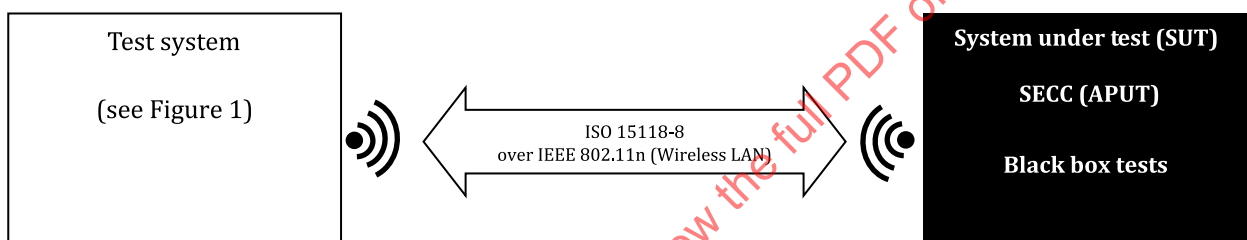

**Figure 3 — Test configuration CF\_09\_001 for SUT SECC (APUT)**

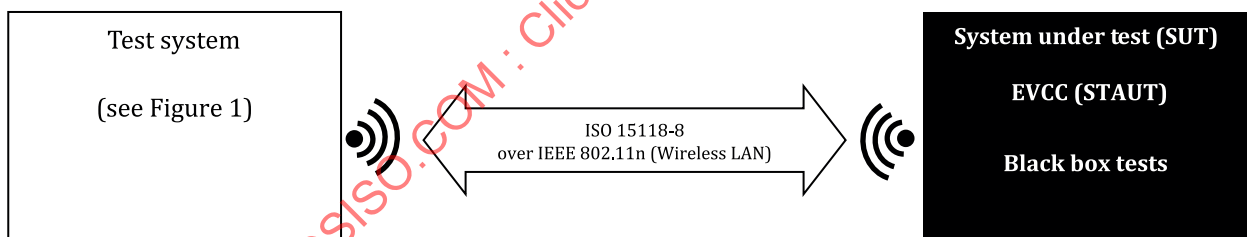

**Figure 4 — Test configuration CF\_09\_002 for SUT EVCC (STAUT)**

### 7.3.2 Components and ports

In correspondence to the identified set of relevant test configurations, this subclause defines test components which reflect the main entities needed for stimulation of the SUT with respect to the ISO 15118 series. Ports are used to connect these components with each other and the SUT. Port types define what kind of messages can be sent or received by this port. All relevant components and ports are defined in [Table 3](#) and [Table 5](#) respectively.

**Table 3 — Component definitions**

Components	Description
SECC_Tester (MTC)	This component type is the main type for the tests of an SECC. A WLAN_Port (see <a href="#">Table 4</a> ) is assigned to this component type.

Table 3 (continued)

Components	Description
EVCC_Tester (MTC)	This component type is the main type for the tests of an EVCC. A WLAN_Port (see <a href="#">Table 4</a> ) is assigned to this component type.

Table 4 — Port type definitions

Port Type	Description
WLAN_Port	This port is used to send/receive WLAN MAC Frames defined in ISO 15118-8 and IEEE 802.11-2012 to/from the EVCC/SECC.

These components and ports comprise relevant test configurations for this document. Whether the type EVCC\_Tester or SECC\_Tester is to be used as MTC depends on the type of the SUT.

**[V2G9-012]** If the SUT is an EVCC, the MTC shall use the type EVCC\_Tester.

**[V2G9-013]** If the SUT is an SECC, the MTC shall use the type SECC\_Tester.

The MTC always contains a TTCN-3 test configuration and delimits the lifeline during test execution. Next to using ports for communication purposes, local timers, variables or constants may be assigned to components to store dynamic information during test case execution.

A test configuration also consists of respective test system interfaces (TSI). An abstract TSI is specified as a collection of ports. A TSI has no local timers, constants or variables; only ports are assigned to it. During the test case execution, test components ports can be mapped dynamically to the TSI ports to establish communication channel to the real test system interface.

In the test configuration the TSI uses the type System\_EVCC or System\_SECC depending on the type of the SUT.

- If the SUT is an EVCC, the TSI uses the type System\_EVCC.
- If the SUT is an SECC, the TSI uses the type System\_SECC.

The test configuration is illustrated in [Figure 5](#). The type of the V2G components and ports (EVCC or SECC) depends on the SUT type.

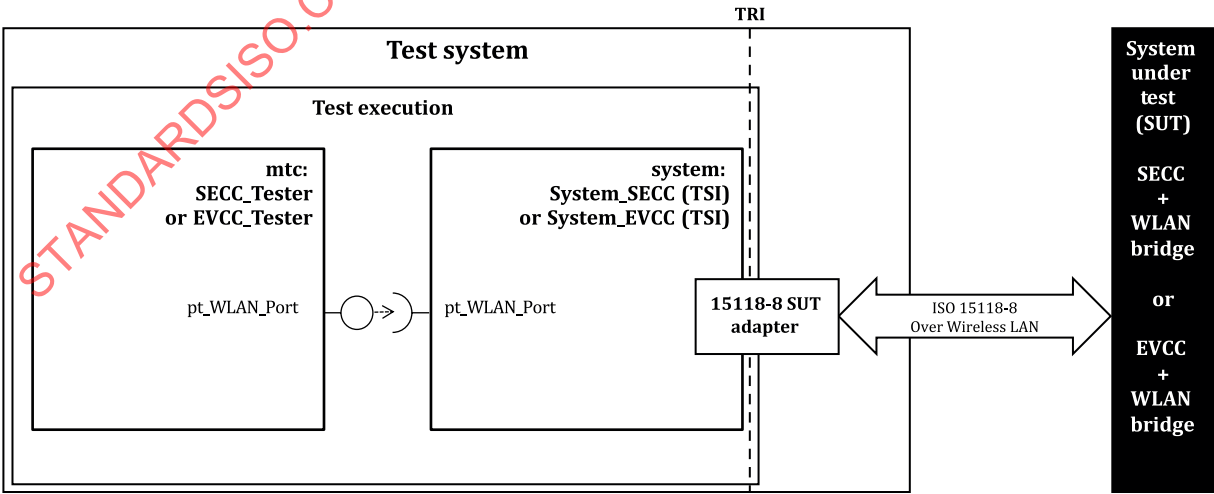


Figure 5 — Test configuration of this document

As shown in [Figure 5](#) the port mappings are defined statically as follows:

- the port pt\_WLAN\_Port of the TSI is always mapped to port pt\_WLAN\_Port of the MTC.

### 7.3.3 Protocol implementation conformance statement (PICS) definition

To evaluate the conformance of a particular SUT, it is necessary to have implementation conformance statements (ICS) of the capabilities and options which have been implemented, and any features which have been omitted, so that the implementation can be tested for conformance against relevant requirements, and against those requirements only. Such a statement is called a protocol implementation conformance statement (PICS), compare to ITU-T X.290.

In this document, no PICS are defined in the ATS.

### 7.3.4 Protocol implementation extra information for testing (PIXIT) definition

In addition to the ICS, further statements (IXIT) made by a supplier or implementer may be required related to the SUT and its testing environment to enable the test laboratory to run the test suite against the SUT. With reference to ISO 15118-8 protocol conformance, the following set of PIXIT is defined in addition to the PICS in this document.

NOTE Due to the black box test paradigm in this document, it is not defined how to ensure that a corresponding PIXIT is set on the SUT side for a given test case execution.

All PIXIT defined in the ATS are summarized in [Table 5](#) to [Table 7](#)

**Table 5 — Selected PIXIT for test system configurations CF\_09\_001 and CF\_09\_002 (SUT either SECC or EVCC)**

PIXIT	Description
PIXIT_CMN_MACADDR_2_4GHz	MAC address of the 2,4 GHz network interface of the SUT
PIXIT_CMN_MACADDR_5GHz	MAC address of the 5 GHz network interface of the SUT
PIXIT_CMN_ETT	Indication which energy transfer types are supported by the SUT One octet with bitfield according to ISO 15118-8:2020, Table 4, e.g.: — 00000011 or 0x3 (→ AC & DC support) — 00000100 or 0x4 (→ WPT support) — 00001000 or 0x8 (→ ACD support)
PIXIT_CMN_ADDINF	Indication which additional information is provided by the SUT Hexbinary according to ISO 15118-8:2020, Table 5
PIXIT_CMN_COUNTRY_CODE	Indication for a two-character country code according to ISO 3166-1
PIXIT_CMN_OPERATOR_ID	Indication for an operator ID as defined in ISO 15118-2:2014, Annex H (see also ISO 15118-8:2020, Table 4 for further information)
PIXIT_CMN_CHARGING_SITE_ID	Indication for a unique identifier of the CS (see also ISO 15118-8:2020, Table 4 for further information)

**[V2G9-014]** For the purpose of testing the values of country code, operator id and charging site id should be compatible between the test system and SUT regarding the values of PIXIT\_CMN\_COUNTRY\_CODE, PIXIT\_CMN\_OPERATOR\_ID, and PIXIT\_CMN\_CHARGING\_SITE\_ID.

**Table 6 — Selected PIXIT for test system configuration CF\_09\_001 (SUT equals SECC)**

PIXIT	Description
PIXIT_SECC_NUMOUTLETS	Indication of whether the SECC supports one or multiple outlets Choice: i) one, ii) multiple
PIXIT_SECC_SUPPORTED_CHANNEL_LIST	List of supported channels in the 2,4 GHz and 5 GHz band according to ISO 15118-8:2020, Tables 1, 2 and national/regional regulations in ISO 15118-8:2020, Annex D as key value pairs list
PIXIT_SECC_CHANNEL_SELECTED	Selected Channel ID in the either 2,4 GHz or 5 GHz band Enumeration with reference to Channel IDs according to ISO 15118-8:2020, Tables 1 and 2.

**Table 7 — Selected PIXIT for test system configuration CF\_09\_002 (SUT equals EVCC)**

PIXIT	Description
PIXIT_EVCC_SCANNING_MODE	Indication whether SUT (EVCC) uses ACTIVE or PASSIVE scanning mode Choice: i) active, ii) passive

### 7.3.5 Test control

For test control the following requirements or recommendations apply for this document:

- [V2G9-015]** Test control shall execute all applicable test cases listed in [8.2](#) for SUT SECC and [8.3](#) for SUT EVCC.
- [V2G9-016]** Test control should execute test cases in the order as they appear in [Table 19](#) for each SUT.
- [V2G9-017]** Test control shall implement the PICS and PIXIT parameters as defined in [7.3.3](#) and [7.3.4](#) and assign them as defined in each test case definition for SUT SECC ([8.2](#)) and for SUT EVCC ([8.3](#)).

## 7.4 Test suite identifiers

The selection of common naming conventions is one simple and often used mechanism to implement test suites which are consistent, maintainable and understandable for multiple users. Therefore, based on common ETSI naming conventions more specific naming conventions for the ISO 15118 conformance test suite are defined.

### 7.4.1 Module identifiers

All modules defined in the TSS start with a capital letter. The ISO 15118 test suite specific module identifier for template, function or test case modules is defined as:

<modtype>\_<sut>\_<ctx>

The segments of this identifier are defined in [Table 8](#). An example for test case module identifier is:

TestCases\_SECC\_VendorSpecificElement

**Table 8 — ISO 15118 test suite naming convention for modules**

Identifier	Values	Description
<modtype>		Module type
	TestCases	Module including test cases
	Functions	Module including functions
	Templates	Module including templates
<sut>		System under test
	EVCC	Electric vehicle communication controller
	SECC	Supply equipment communication controller
	CMN	Common (exclusively for template modules)
<ctx>	{fullname}	Context (e.g. name of message pattern signal name according to standard)

NOTE For module types other than templates, functions or test cases there is no identifier format defined.

#### 7.4.2 Test case identifiers

The naming conventions for test cases are using a prefix, which is defined by ETSI as shown in [Table 9](#).

**Table 9 — ETSI naming convention for test case names**

Keyword	Definition	Example
testcase name	Every test case begins with TC (TC_) TC_TestCaseName	TC_DNSResponse

The ISO 15118 test suite specific test case identifier is defined as:

TC\_<sut>\_<ctx>\_<nn>

The segments of this identifier are described in [Table 10](#). An example for test case identifier is:

TC\_SECC\_VendorSpecificElement\_001

**Table 10 — ISO 15118 test suite naming convention for test case identifiers**

Identifier	Values	Description
<prefix>	TC	See <a href="#">Table 9</a>
<sut>		System under test
	EVCC	Electric vehicle communication controller
	SECC	Supply equipment communication controller
<ctx>	{fullname}	Context (e.g. name of message pattern signal name according to standard)
<nn>	{xxx}	Sequential number from 001 to 999

#### 7.4.3 Template identifiers

The naming conventions for templates are using a prefix, which is defined by ETSI as shown in [Table 11](#).

**Table 11 — ETSI naming convention for templates**

Keyword	Context	Definition	Example
template name	Templates with concrete attribute values	Every template begins with keyword m (m_)	m_DNSRequest

**Table 11 (continued)**

Keyword	Context	Definition	Example
template name	Templates with wildcards or matching expression	If a template contains or refers to templates with wildcards {* ?} then template name begins with keyword mw (mw_)	mw_DNSResponse
template name	Templates with parameters, which do not assign or refer to templates with wildcards or matching expression	If a template contains attributes which are defined by parameters or constant values, then template name begins with keyword md (md_)	md_DNSResponse (integer ip)
template name	Templates with parameters, which do assign or refer to templates with wildcards or matching expression	If a template contains attributes which are defined by parameters, constant values or wildcards, then template name begins with keyword mdw (mdw_)	mdw_DNSResponse (integer ip)

The ISO 15118 test suite specific template identifier is defined as:

<prefix>\_<sut>\_<dtyp>\_<nn>

The segments of this identifier are described in [Table 12](#). An example for template identifier is:

md\_EVCC\_VendorSpecificElement\_001

**Table 12 — ISO 15118 test suite naming convention for template identifiers**

Identifier	Values	Description
<prefix>		Type of template (see <a href="#">Table 11</a> )
<sut>		System under test
	EVCC	Electric vehicle communication controller
	SECC	Supply equipment communication controller
	CMN	Common
<dtyp>	{fullname}	Label of (root) data type according to standard
<nn>	{xxx}	Sequential number from 001 to 999

#### 7.4.4 Function identifiers

The naming conventions for functions are using a prefix, which is defined by ETSI as shown in [Table 13](#).

**Table 13 — ETSI naming convention for function names**

Keyword	Context	Definition	Example
function name	All functions	Every function begins with f (f_)	f_functionName

The ISO 15118 test suite naming convention for test case functions is defined as:

<prefix>\_<sut>\_<ctx>\_<nn>

The segments of this identifier are described in [Table 14](#). An example for template identifier is:

f\_EVCC\_VendorSpecificElement\_001

**Table 14 — ISO 15118 test suite naming convention for function names**

Identifier	Values	Description
<prefix>		f_ (see <a href="#">Table 13</a> )



**Table 14** (continued)

Identifier	Values	Description
<sut>		System under test
	EVCC	Electric vehicle communication controller
	SECC	Supply equipment communication controller
<ctx>	{fullname}	Context (e.g. name of message pattern signal name according to standard)
<nn>	{xxx}	Sequential number from 001 to 999

#### 7.4.5 Timer identifiers

The naming conventions for timers are using a prefix, which is defined by ETSI as shown in [Table 15](#).

**Table 15 — ETSI naming convention for timers**

Keyword	Context	Definition	Example
timer name	t_	Local timer	t_wait
timer name	tc_	Timer defined within a component	tc_authMin

The ISO 15118 test suite specific timer identifier is defined as:

<prefix>\_<ctx>

The segments of this identifier are described in [Table 16](#). An example for timer identifier is:

tc\_Beacon

**Table 16 — ISO 15118 test suite naming convention for timer identifiers**

Identifier	Values	Description
<prefix>		Type of timer (see <a href="#">Table 15</a> )
<ctx>	{fullname}	Context (e.g. name of timer according to ISO 15118-8 or if not part of ISO 15118-8 any given name describing the context of the timer)

#### 7.4.6 PICS/PIXIT identifiers

The ISO 15118 test suite naming convention for PICS/PIXIT is defined as:

<pic>\_<sut>\_<ctx>

The segments of this identifier are described in [Table 17](#). An example for PICS/PIXIT identifier is:

PICS\_SECC\_ScanningMode

**Table 17 — ISO 15118 test suite naming convention for PICS/PIXIT identifiers**

Identifier	Values	Description
<pic>		Protocol implementation capability
	PICS	Protocol implementation conformance statement
	PIXIT	Protocol implementation extra information for testing
<sut>		System under test
	EVCC	Electric vehicle communication controller
	SECC	Supply equipment communication controller
	CMN	Common
<ctx>	{fullname}	Context (e.g. name of message pattern signal name according to standard)



### 7.4.7 Verdict identifiers

In this subclause the conventions for test verdicts are defined. The test verdicts defined in this document are listed in [Table 18](#).

**Table 18 — ISO 15118 test suite conventions on verdict handling**

Verdict type	TTCN-3 definition	ISO 15118 Test suite
none	Is implicitly assigned in the beginning of every test case by default and is reported as a final verdict in the absence of any other verdict assignment during the test case execution.	No TSS specific definition (see TTCN-3 definition).
pass	Means that everything is OK. A verdict given when the observed outcome satisfies the test purpose and is valid with respect to the relevant requirements and with respect to the PICS. See ITU-T X.290.	If in review of a requirement the SUT has a correct behaviour, then this verdict type shall be used.
inconc	A verdict given when the observed outcome is valid with respect to the relevant requirements but prevents the test purpose from being accomplished. See ITU-T X.290.	Means that neither pass nor fail can be reliably assigned.
fail	A verdict given when the observed outcome is syntactically invalid or inopportune with respect to the relevant requirements or the PICS/PIXIT. See ITU-T X.290.	If in review of a requirement the SUT has a wrong behaviour, then this verdict type shall be used.

### 7.5 Test suite coverage

This subclause details the test coverage of this document per requirement in ISO 15118-8. [Table 19](#) shows how the requirements in ISO 15118-8 are mapped against the test cases defined in [8.2](#) and [8.3](#).

- X Indicates requirements that are covered in the ATS with one or more test cases.
- P Indicates requirements that are only partially covered by one or more test cases in the ATS.
- N Requirements that are not testable for the respective SUT.
- Requirements that are not applicable for the profile defined in the respective column.
- O Requirements that are out of scope for the profile defined in the respective column.

**Table 19 — Requirements of ISO 15118-8 mapped to test cases in this document**

Req. ID	SUT		Test Case ID	Comment
	EVCC	SECC		
V2G8-001	-	O	-	Out of scope - requirement generally refers to external document reference IEEE 802.11-2012.  If the SUT is certified according to the corresponding WiFi Alliance certification program, this requirement may be considered correctly implemented by the SUT.

Table 19 (continued)

Req. ID	SUT		TestCase ID	Comment
	EVCC	SECC		
V2G8-002	-	P	TC_SECC_Advertising_001 TC_SECC_Advertising_002	Test case provides only partial validation of requirement: test case only validates Beacon frames and probe response frames.
V2G8-003	-	P	TC_SECC_Advertising_003 TC_SECC_Advertising_004 TC_SECC_Advertising_005	Test case provides only partial validation of requirement: HT capability in reassociation response frame not testable - no deterministic trigger for black box test identified.
V2G8-004	-	X	TC_SECC_Advertising_006 TC_SECC_Advertising_007	
V2G8-005	-	X	TC_SECC_BandSupport_001	
V2G8-006	-	X	TC_SECC_BandSupport_002	
V2G8-007	-	X	TC_SECC_BandSupport_003 TC_SECC_BandSupport_004	
V2G8-008	-	X	TC_SECC_ChannelSupport_001 TC_SECC_ChannelSupport_002	
V2G8-009	-	N		With reference to ISO 15118-8:2020, 7.2.4, NOTE 4, the channel selection algorithm is out of the scope of ISO 15118-8. Therefore, testing of requirements in ISO 15118-8:2020, 7.2.4 is also out of scope of this document.
V2G8-010	-	N	-	
V2G8-011	-	N		
V2G8-012	-	N		
V2G8-013	-	N		
V2G8-014	-	N		
V2G8-015	-	N		
V2G8-016	-	O		If the SUT is certified according to the corresponding WiFi Alliance certification program, this requirement may be considered correctly implemented by the SUT.
V2G8-017	-	N	-	Not explicitly testable in black box test – requirement defines an internal behaviour.
V2G8-018	-	X	TC_SECC_VendorSpecificElement_001	
V2G8-019	-	X	TC_SECC_VendorSpecificElement_002	
V2G8-020	-	X	TC_SECC_VendorSpecificElement_003 TC_SECC_VendorSpecificElement_004	
V2G8-021	-	N	-	Not explicitly testable in black box test – requirement defines an internal behaviour.
V2G8-022	O	-	-	Out of scope – requirement generally refers to external document reference IEEE 802.11-2012.  If the SUT is certified according to the corresponding WiFi Alliance certification program, this requirement may be considered correctly implemented by the SUT.

Table 19 (continued)

Req. ID	SUT		TestCase ID	Comment
	EVCC	SECC		
V2G8-023	P	-	TC_EVCC_Scanning_001	Test case provides only partial validation of requirement: verdict 'fail' does not necessarily confirm non-conformance with respect to the requirement, because there may other reasons to prevent successful association with the AP.
V2G8-024	P	-	TC_EVCC_Scanning_002 TC_EVCC_Scanning_003 TC_EVCC_Scanning_004 TC_EVCC_Scanning_005	Test case provides only partial validation of requirement: HT capability in reassociation request frame not testable - No deterministic trigger for black box test identified.
V2G8-025	X	-	TC_EVCC_Scanning_006 TC_EVCC_Scanning_007 TC_EVCC_Scanning_008 TC_EVCC_Scanning_009	
V2G8-026	X	-	TC_EVCC_BandSupport_001 TC_EVCC_BandSupport_002 TC_EVCC_BandSupport_003 TC_EVCC_BandSupport_004	
V2G8-027	X	-	TC_EVCC_BandSupport_001 TC_EVCC_BandSupport_002 TC_EVCC_BandSupport_003 TC_EVCC_BandSupport_004	
V2G8-028	X	-	TC_EVCC_BandSupport_001 TC_EVCC_BandSupport_002 TC_EVCC_BandSupport_003 TC_EVCC_BandSupport_004	
V2G8-029	O	-		If the SUT is certified according to the corresponding WiFi Alliance certification program, this requirement may be considered correctly implemented by the SUT.
V2G8-030	N	-	-	Not explicitly testable in black box test – requirement defines an internal behaviour.
V2G8-031	X	-	TC_EVCC_VendorSpecificElement_001	
V2G8-032	N	-		VSE in reassociation request frame not testable - no deterministic trigger for black box test identified.
V2G8-033	X	-	TC_EVCC_VendorSpecificElement_002	
V2G8-034	X	-	TC_EVCC_VendorSpecificElement_003 TC_EVCC_VendorSpecificElement_004	VSE in reassociation request frame not testable - no deterministic trigger for black box test identified.
V2G8-035	N	-	-	Not explicitly testable in black box test – requirement defines an internal behaviour.

**Table 19** (continued)

Req. ID	SUT		TestCase ID	Comment
	EVCC	SECC		
V2G8-036	N	-	-	Not explicitly testable in black box test – requirement defines an internal behaviour.

## 7.6 Test case description

The abstract test case descriptions in this document are described according to the template shown in [Table 20](#).

**Table 20 — Abstract test case description template**

<b>TC Id</b>	The TC Id is a unique identifier for a test case. It is specified according to the TC Id naming convention defined in <a href="#">7.4.2</a> .
<b>Test purpose</b>	<p>Short description of test purpose according to the requirements from the base standard (ISO 15118-8).</p> <p>For the definition of message elements and their value assignments, the following syntax is used:</p> <ul style="list-style-type: none"> <li>— ElementName: &lt;Value&gt; → Value assignment to ElementName with or without consideration of PIXIT;</li> <li>— ElementName: (&lt;Value&gt; .. &lt;Value&gt;) → Possible value range for ElementName;</li> <li>— ElementName: ? → mandatory element with any value according to the format defined in ISO 15118-8;</li> <li>— ElementName: * → optional element with any value according to the format defined in ISO 15118-8 that may also be omitted.</li> </ul> <p>EXAMPLE 1</p> <ul style="list-style-type: none"> <li>— ElementID: 'DD'H ( → 'DD' in hex binary)</li> <li>— Length: ('11'H .. 'FF'H) ( → value range from '11' to 'FF' in hex binary)</li> <li>— ChargingSiteID: ?</li> <li>— Additional Information (optional): *</li> </ul>
<b>Document reference</b>	<p>The document reference indicates the subclauses of the reference standard specifications in which the conformance requirement(s) is/are expressed. The references are provided according to the following format:</p> <p>Document: ISO15118-X:20XX:(IS FDIS)</p> <p>Section(s): x.x.x.x.x, y.y.y.y, ...</p>
<b>Referenced requirement(s)</b>	<p>The referenced requirement(s) refers to the subclauses of the referenced standard specification requirement(s). The requirements are referenced according to the format defined in ISO 15118-8:</p> <p>[V2G8-YXX-ZZZ], ...</p>
<b>Config Id</b>	<p>The Config Id references the ISO 15118-8 configuration selected for this test case according to <a href="#">7.3.1</a>. EXAMPLE 2</p> <p>CF_09_001, ...</p>
<b>PICS selection</b>	<p>The PICS selection references the PICS statement(s) for this test case in accordance with <a href="#">7.3.3</a>. EXAMPLE 3</p> <p>None defined.</p>

**Table 20** (continued)

<b>PIXIT selection</b>	The PIXIT selection references the PIXIT statement(s) for this test case in accordance with 7.3.4. EXAMPLE 4 PIXIT_CMN_ETT
------------------------	---

## 8 Test case descriptions for ISO 15118-8 requirements

### 8.1 General information

Subclause 8.2 covers all test cases for SECC according to ISO 15118-8 while 8.3 covers all test cases for EVCC according to ISO 15118-8, respectively.

### 8.2 SECC test cases

Table 21 lists the abstract test case description for 'TC\_SECC\_Advertising\_001'.

**Table 21 — Abstract test case description for 'TC\_SECC\_Advertising\_001'**

<b>TC Id</b>	TC_SECC_Advertising_001
<b>Test purpose</b>	<p>This TC observes whether Beacon frames are sent by the APUT. If the channel of the APUT can be explicitly set, this test case shall be repeated for all supported channels by the APUT.</p> <p>Prerequisite: No prerequisite.</p> <p>Pre-condition: The APUT is ready to operate as an access point according to IEEE 802.11-2012 on one of the supported channels (PIXIT_SECC_SUPPORTED_CHANNEL_LIST).</p> <p>The test system (STA) is initialized to a state, where it is configured as a STA without AP capability and ready to monitor Beacon frames from the APUT on all allowed channels according to ISO 15118-8:2020, Tables 1, 2.</p> <p>NOTE National/regional regulations can apply. See ISO 15118-8:2020, Annex D.</p> <p>Test behaviour: The test system (STA) captures incoming frames and checks whether Beacon frames from the APUT (PIXIT_CMN_MACADDR_2_4GHz or PIXIT_CMN_MACADDR_5GHz) according to IEEE 802.11-2012 are received.</p> <p>Post-condition: APUT and test system (STA) are reset to initial state.</p>
<b>Document reference</b>	ISO 15118-8:2020, 7.2.2
<b>Referenced requirement(s)</b>	[V2G8-002]
<b>Config Id</b>	CF_09_001
<b>PICS selection</b>	

**Table 21** (continued)

<b>PIXIT selection</b>	PIXIT_CMN_MACADDR_2_4GHz
	PIXIT_CMN_MACADDR_5GHz
	PIXIT_SECC_SUPPORTED_CHANNEL_LIST

[Table 22](#) lists the abstract test case description for 'TC\_SECC\_Advertising\_002'.

**Table 22 — Test case description for 'TC\_SECC\_Advertising\_002'**

<b>TC Id</b>	TC_SECC_Advertising_002
<b>Test purpose</b>	<p>This TC observes whether the APUT responds to probe request frames. If the channel of the APUT can be explicitly set, this test case shall be repeated for all supported channels by the APUT.</p> <p>Prerequisite: No prerequisite.</p> <p>Pre-condition: The APUT is ready to operate as an access point according to IEEE 802.11-2012 on one of the supported channels (PIXIT_SECC_SUPPORTED_CHANNEL_LIST).</p> <p>The test system (STA) is initialized to a state, where it is configured as a STA without AP capability and ready to monitor Beacon frames from the APUT on all allowed channels according to ISO 15118-8:2020, Tables 1-2.</p> <p>NOTE National/regional regulations can apply. See ISO 15118-8:2020, Annex D.</p> <p>Test behaviour: The test system (STA) sends a probe request frame according to the active scanning procedure as defined IEEE 802.11-2012 containing a valid VSE element with the following format:</p> <p style="margin-left: 40px;">ElementID: 'DD'H Length: '07'H OrganizationID: '70B3D53190'H ElementType: '02'H ETT: '0F'H</p> <p>The test system then checks whether a probe response frame from the APUT (PIXIT_CMN_MACADDR_2_4GHz or PIXIT_CMN_MACADDR_5GHz) according to IEEE 802.11-2012 is received.</p> <p>Post-condition: APUT and test system (STA) are reset to initial state.</p>
<b>Document reference</b>	ISO 15118-8:2020, 7.2.2
<b>Referenced requirement(s)</b>	[V2G8-002]
<b>Config Id</b>	CF_09_001
<b>PICS selection</b>	

**Table 22 (continued)**

<b>PIXIT selection</b>	PIXIT_CMN_MACADDR_2_4GHz
	PIXIT_CMN_MACADDR_5GHz
	PIXIT_SECC_SUPPORTED_CHANNEL_LIST

[Table 23](#) lists the abstract test case description for 'TC\_SECC\_Advertising\_003'.

**Table 23 — Test case description for 'TC\_SECC\_Advertising\_003'**

<b>TC Id</b>	TC_SECC_Advertising_003
<b>Test purpose</b>	<p>This TC observes whether the Beacon frames of the APUT contain the HT capabilities element. If the channel of the APUT can be explicitly set, this test case shall be repeated for all supported channels by the APUT.</p> <p>Prerequisite: No prerequisite.</p> <p>Pre-condition: The APUT is ready to operate as an access point according to IEEE 802.11-2012 on one of the supported channels (PIXIT_SECC_SUPPORTED_CHANNEL_LIST).</p> <p>The test system (STA) is initialized to a state, where it is configured as a STA without AP capability and ready to monitor Beacon frames from the APUT on all allowed channels according to ISO 15118-8:2020, Tables 1, 2.</p> <p>NOTE National/regional regulations can apply. See ISO 15118-8:2020, Annex D.</p> <p>Test behaviour: The test system (STA) captures incoming frames and checks whether Beacon frames from the APUT (PIXIT_CMN_MACADDR_2_4GHz or PIXIT_CMN_MACADDR_5GHz) according to IEEE 802.11-2012 are received containing the HT capabilities element and whether APUT replies with association response frame with Success flag set in response to the association request frame sent to APUT.</p> <p>Post-condition: APUT and test system (STA) are reset to initial state.</p>
<b>Document reference</b>	ISO 15118-8:2020, 7.2.2
<b>Referenced requirement(s)</b>	[V2G8-003]
<b>Config Id</b>	CF_09_001
<b>PICS selection</b>	
<b>PIXIT selection</b>	PIXIT_CMN_MACADDR_2_4GHz PIXIT_CMN_MACADDR_5GHz PIXIT_SECC_SUPPORTED_CHANNEL_LIST

[Table 24](#) lists the abstract test case description for 'TC\_SECC\_Advertising\_004'.

**Table 24 — Abstract test case description for 'TC\_SECC\_Advertising\_004'**

<b>TC Id</b>	TC_SECC_Advertising_004
--------------	-------------------------

**Table 24** (continued)

<b>Test purpose</b>	<p>This TC observes whether the probe response frames of the APUT contain the HT Capabilities element. If the channel of the APUT can be explicitly set, this test case shall be repeated for all supported channels by the APUT.</p> <p>Prerequisite: No prerequisite.</p> <p>Pre-condition: The APUT is ready to operate as an access point according to IEEE 802.11-2012 on one of the supported channels (PIXIT_SECC_SUPPORTED_CHANNEL_LIST).</p> <p>The test system (STA) is initialized to a state, where it is configured as a STA without AP capability and ready to monitor Beacon frames from the APUT on all allowed channels according to ISO 15118-8:2020, Tables 1, 2.</p> <p>NOTE National/regional regulations can apply. See ISO 15118-8:2020, Annex D.</p> <p>Test behaviour: The test system (STA) sends a probe request frame according to the active scanning procedure as defined IEEE 802.11-2012 containing a valid VSE element with the following format:</p> <p style="margin-left: 40px;">ElementID: 'DD'H Length: '07'H OrganizationID: '70B3D53190'H ElementType: '02'H ETT: '0F'H</p> <p>The test system then checks whether a probe response frame from the APUT (PIXIT_CMN_MACADDR_2_4GHz or PIXIT_CMN_MACADDR_5GHz) according to IEEE 802.11-2012 is received containing the HT capabilities element and whether APUT replies with association response frame with success flag set in response to the association request frame sent to APUT.</p> <p>Post-condition: APUT and test system (STA) are reset to initial state.</p>
<b>Document reference</b>	ISO 15118-8:2020, 7.2.2
<b>Referenced requirement(s)</b>	[V2G8-003]
<b>Config Id</b>	CF_09_001
<b>PICS selection</b>	
<b>PIXIT selection</b>	PIXIT_CMN_MACADDR_2_4GHz PIXIT_CMN_MACADDR_5GHz PIXIT_SECC_SUPPORTED_CHANNEL_LIST

[Table 25](#) lists the abstract test case description for 'TC\_SECC\_Advertising\_005'.



**Table 25 — Abstract test case description for 'TC\_SECC\_Advertising\_005'**

<b>TC Id</b>	TC_SECC_Advertising_005
<b>Test purpose</b>	<p>This TC observes whether the association response frames of the APUT contain the HT capabilities element. If the channel of the APUT can be explicitly set, this test case shall be repeated for all supported channels by the APUT.</p> <p>Prerequisite: No prerequisite.</p> <p>Pre-condition: The APUT is ready to operate as an access point according to IEEE 802.11-2012 on one of the supported channels (PIXIT_SECC_SUPPORTED_CHANNEL_LIST).</p> <p>The test system (STA) is initialized to a state, where it is configured as a STA without AP capability and ready to monitor Beacon frames from the APUT on all allowed channels according to ISO 15118-8:2020, Tables 1, 2.</p> <p>NOTE National/regional regulations can apply. See ISO 15118-8:2020, Annex D.</p> <p>Test behaviour: The test system (STA) sends an association request frame to the APUT (PIXIT_CMN_MACADDR_2_4GHz or PIXIT_CMN_MACADDR_5GHz) according to IEEE 802.11-2012 containing a valid VSE element with the following format:</p> <p style="margin-left: 40px;">ElementID: 'DD'H Length: '07'H OrganizationID: '70B3D53190'H ElementType: '02'H ETT: '0F'H</p> <p>The test system then checks whether an association response frame from the APUT (PIXIT_CMN_MACADDR_2_4GHz or PIXIT_CMN_MACADDR_5GHz) according to IEEE 802.11-2012 is received containing the HT capabilities element and whether APUT replies with association response frame with success flag set in response to the association request frame sent to APUT.</p> <p>Post-condition: APUT and test system (STA) are reset to initial state.</p>
<b>Document reference</b>	ISO 15118-8:2020, 7.2.2
<b>Referenced requirement(s)</b>	[V2G8-003]
<b>Config Id</b>	CF_09_001
<b>PICS selection</b>	
<b>PIXIT selection</b>	<p>PIXIT_CMN_MACADDR_2_4GHz</p> <p>PIXIT_CMN_MACADDR_5GHz</p> <p>PIXIT_SECC_SUPPORTED_CHANNEL_LIST</p>

[Table 26](#) lists the abstract test case description for 'TC\_SECC\_Advertising\_006'.

**Table 26 — Test case description for 'TC\_SECC\_Advertising\_006'**

<b>TC Id</b>	TC_SECC_Advertising_006
<b>Test purpose</b>	<p>This TC observes whether Beacon frames are sent by the APUT with T_beacon not exceeding 105 ms by the APUT in the 2,4 GHz band according to ISO 15118-8:2020, Table 1.</p> <p>Prerequisite: No prerequisite.</p> <p>Pre-condition: The APUT is ready to operate as an access point according to IEEE 802.11-2012 on one of the supported channels (PIXIT_SECC_SUPPORTED_CHANNEL_LIST) in the 2,4 GHz band according to ISO 15118-8:2020, Table 1.</p> <p>The test system (STA) is initialized to a state, where it is configured as a STA without AP capability and ready to monitor Beacon frames from the APUT on all allowed channels in the 2,4 GHz band according to ISO 15118-8:2020, Table 1.</p> <p>Test behaviour: The test system (STA) captures at least 100 incoming Beacon frames from the APUT (PIXIT_CMN_MACADDR_2_4GHz) according to IEEE 802.11-2012 and checks whether the interval of 105 ms between two consecutive Beacon frames is not exceeded for the complete set of 100 samples.</p> <p>Post-condition: APUT and test system (STA) are reset to initial state.</p> <p>NOTE The result of this test case is subject to environmental conditions such as interference from other transmissions on the selected channel or system load (e.g. high number of clients of the same access point).</p>
<b>Document reference</b>	ISO 15118-8:2020, 7.2.2
<b>Referenced requirement(s)</b>	[V2G8-004]
<b>Config Id</b>	CF_09_001
<b>PICS selection</b>	
<b>PIXIT selection</b>	PIXIT_CMN_MACADDR_2_4GHz PIXIT_SECC_SUPPORTED_CHANNEL_LIST

[Table 26](#) lists the abstract test case description for 'TC\_SECC\_Advertising\_007'.

**Table 27 — Test case description for 'TC\_SECC\_Advertising\_007'**

<b>TC Id</b>	TC_SECC_Advertising_007
--------------	-------------------------

**Table 27 (continued)**

<b>Test purpose</b>	<p>This TC observes whether Beacon frames are sent by the APUT with T_beacon not exceeding 105 ms by the APUT in the 5 GHz band according to ISO 15118-8:2020, Table 2.</p> <p>NOTE 1 National/regional regulations can apply. See ISO 15118-8:2020, Annex D.</p> <p>Prerequisite: No prerequisite.</p> <p>Pre-condition: The APUT is ready to operate as an access point according to IEEE 802.11-2012 on one of the supported channels (PIXIT_SECC_SUPPORTED_CHANNEL_LIST) in the 5 GHz band according to ISO 15118-8:2020, Table 2.</p> <p>NOTE 2 National/regional regulations can apply. See ISO 15118-8:2020, Annex D.</p> <p>The test system (STA) is initialized to a state, where it is configured as a STA without AP capability and ready to monitor Beacon frames from the APUT on all allowed channels in the 5 GHz band according to ISO 15118-8:2020, Table 2.</p> <p>NOTE 3 National/regional regulations can apply. See ISO 15118-8:2020, Annex D.</p> <p>Test behaviour: The test system (STA) captures at least 100 incoming Beacon frames from the APUT (PIXIT_CMN_MACADDR_5GHz) according to IEEE 802.11-2012 and checks whether the interval of 105 ms between two consecutive Beacon frames is not exceeded for the complete set of 100 samples.</p> <p>Post-condition: APUT and test system (STA) are reset to initial state.</p> <p>NOTE 4 The result of this test case is subject to environmental conditions such as interference from other transmissions on the selected channel or system load (e.g. high number of clients of the same access point).</p>
<b>Document reference</b>	ISO 15118-8:2020, 7.2.2
<b>Referenced requirement(s)</b>	[V2G8-004]
<b>Config Id</b>	CF_09_001
<b>PICS selection</b>	
<b>PIXIT selection</b>	PIXIT_CMN_MACADDR_5GHz PIXIT_SECC_SUPPORTED_CHANNEL_LIST

[Table 28](#) lists the abstract test case description for 'TC\_SECC\_BandSupport\_001'.

**Table 28 — Abstract test case description for 'TC\_SECC\_BandSupport\_001'**

<b>TC Id</b>	TC_SECC_BandSupport_001
--------------	-------------------------

**Table 28** (continued)

<b>Test purpose</b>	<p>In case the SECC supports WPT (PIXIT_CMN_ETT), this TC observes whether concurrent dual band support is provided by the APUT.</p> <p>Prerequisite: The APUT implements support for WPT charging use case.</p> <p>Pre-condition: The APUT is ready to operate as an access point according to IEEE 802.11-2012 on any two supported channels (PIXIT_SECC_SUPPORTED_CHANNEL_LIST), but one in each of the 2,4 GHz according to ISO 15118-8:2020, Table 1 and 5 GHz band according to ISO 15118-8:2020, Table 2.</p> <p>NOTE 1 National/regional regulations can apply. See ISO 15118-8:2020, Annex D.</p> <p>The test system (STA) is initialized to a state, where it is configured as a STA without AP capability and ready to monitor Beacon frames from the APUT on all allowed channels according to ISO 15118-8:2020, Tables 1, 2.</p> <p>NOTE 2 National/regional regulations can apply. See ISO 15118-8:2020, Annex D.</p> <p>Test behaviour: The test system (STA) monitors all allowed channels in the 2,4 GHz band according to ISO 15118-8:2020, Table 1 and 5 GHz band according to ISO 15118-8:2020, Table 2 (national/regional regulations can apply, see ISO 15118-8:2020, Annex D) and check if Beacon frames from the APUT (PIXIT_CMN_MACADDR_2_4GHz) in 2,4 GHz band and Beacon frames from the APUT (PIXIT_CMN_MACADDR_5GHz) in 5 GHz band are sent simultaneously. To check concurrent operation of both bands, Beacon frames from both addresses shall be received in some form of interleaving pattern for test verdict 'pass'.</p> <p>Then the test system (STA) starts the association procedure with APUT addresses (PIXIT_CMN_MACADDR_2_4GHz and PIXIT_CMN_MACADDR_5GHz) by sending a probe request frame until receiving an association response frame according to IEEE 802.11-2012. To check concurrent operation of both bands, one association procedure shall be started before the other association procedure is finished, so that both association procedures significantly overlap in time for test verdict 'pass'.</p> <p>Post-condition: APUT and test system (STA) are reset to initial state.</p> <p>NOTE 3 It is the test operator's discernment for the concurrency criteria which is used for the test verdict.</p>
<b>Document reference</b>	ISO 15118-8:2020, 7.2.3
<b>Referenced requirement(s)</b>	[V2G8-005]
<b>Config Id</b>	CF_09_001
<b>PICS selection</b>	

**Table 28 (continued)**

<b>PIXIT selection</b>	PIXIT_CMN_MACADDR_2_4GHz
	PIXIT_CMN_MACADDR_5GHz
	PIXIT_CMN_ETT := 0000x1xx (Bitfield shall include WPT)
	PIXIT_SECC_SUPPORTED_CHANNEL_LIST

Table 29 lists the abstract test case description for 'TC\_SECC\_BandSupport\_002'.

**Table 29 — Abstract test case description for 'TC\_SECC\_BandSupport\_002'**

<b>TC Id</b>	TC_SECC_BandSupport_002
<b>Test purpose</b>	<p>In case the SECC supports two or more power outlets at a time (PIXIT_SECC_NUMOUT-LETS), this TC observes whether concurrent dual band support is provided by the APUT.</p> <p>Prerequisite: The APUT implements support for two or more power outlets at a time.</p> <p>Pre-condition: The APUT is ready to operate as an access point according to IEEE 802.11-2012 on any two supported channels (PIXIT_SECC_SUPPORTED_CHANNEL_LIST), but one in each of the 2,4 GHz band according to ISO 15118-8:2020, Table 1 and 5 GHz band according to ISO 15118-8:2020, Table 2.</p> <p>NOTE 1 National/regional regulations can apply. See ISO 15118-8:2020, Annex D.</p> <p>The test system (STA) is initialized to a state, where it is configured as a STA without AP capability and ready to monitor Beacon frames from the APUT on all allowed channels according to ISO 15118-8:2020, Tables 1, 2.</p> <p>NOTE 2 National/regional regulations can apply. See ISO 15118-8:2020, Annex D.</p> <p>Test behaviour: The test system (STA) monitors all allowed channels in the 2,4 GHz band according to ISO 15118-8:2020, Table 1 and 5 GHz band according to ISO 15118-8:2020, Table 2 (national/regional regulations can apply, see ISO 15118-8:2020, Annex D) and check if Beacon frames from the APUT (PIXIT_CMN_MACADDR_2_4GHz) in 2,4 GHz band and Beacon frames from the APUT (PIXIT_CMN_MACADDR_5GHz) in 5 GHz band are sent simultaneously. To check concurrent operation of both bands, Beacon frames from both addresses shall be received in some form of interleaving pattern for test verdict 'pass'.</p> <p>Then the test system (STA) starts an association procedure with APUT addresses (PIXIT_CMN_MACADDR_2_4GHz and PIXIT_CMN_MACADDR_5GHz) by sending a probe request frame until receiving an association response frame according to IEEE 802.11-2012. To check concurrent operation of both bands, one association procedure shall be started before the other association procedure is finished, so that both association procedures significantly overlap in time for test verdict 'pass'.</p> <p>Post-condition: APUT and test system (STA) are reset to initial state.</p> <p>NOTE 3 It is the test operator's discernment for the concurrency criteria which is used for the test verdict.</p>

**Table 29 (continued)**

<b>Document reference</b>	ISO 15118-8:2020, 7.2.3
<b>Referenced requirement(s)</b>	[V2G8-006]
<b>Config Id</b>	CF_09_001
<b>PICS selection</b>	
<b>PIXIT selection</b>	PIXIT_CMN_MACADDR_2_4GHz PIXIT_CMN_MACADDR_5GHz PIXIT_SECC_NUMOUTLETS := multiple PIXIT_SECC_SUPPORTED_CHANNEL_LIST

[Table 30](#) lists the abstract test case description for 'TC\_SECC\_BandSupport\_003'.

**Table 30 — Abstract test case description for 'TC\_SECC\_BandSupport\_003'**

<b>TC Id</b>	TC_SECC_BandSupport_003
<b>Test purpose</b>	<p>In case the SECC controlling only one power outlet at a time (PIXIT_SECC_NUMOUTLETS), this TC observes whether 2,4 GHz band support according to ISO 15118-8:2020, Table 1 is provided by the APUT.</p> <p>Prerequisite: No prerequisite.</p> <p>Pre-condition: The APUT is ready to operate as an access point according to IEEE 802.11-2012 on one of the supported channels (PIXIT_SECC_SUPPORTED_CHANNEL_LIST) in the 2,4 GHz band according to ISO 15118-8:2020, Table 1.</p> <p>The test system (STA) is initialized to a state, where it is configured as a STA without AP capability and ready to monitor Beacon frames from the APUT on all allowed channels in the 2,4 GHz band according to ISO 15118-8:2020, Table 1.</p> <p>Test behaviour: The test system (STA) starts scanning all allowed channels in the 2,4 GHz band according to ISO 15118-8:2020, Table 1. The test system then checks whether Beacon frames from the APUT (PIXIT_CMN_MACADDR_2_4GHz) according to IEEE 802.11-2012 are received and whether APUT replies with association response frame with Success flag set in response to the association request frame sent to APUT.</p> <p>Post-condition: APUT and test system (STA) are reset to initial state.</p>
<b>Document reference</b>	ISO 15118-8:2020, 7.2.3
<b>Referenced requirement(s)</b>	[V2G8-007]
<b>Config Id</b>	CF_09_001
<b>PICS selection</b>	

**Table 30 (continued)**

<b>PIXIT selection</b>	PIXIT_CMN_MACADDR_2_4GHz PIXIT_SECC_NUMOUTLETS := one PIXIT_CMN_ETT := 0000x0xx (Bitfield shall NOT include WPT) PIXIT_SECC_SUPPORTED_CHANNEL_LIST
------------------------	---

[Table 31](#) lists the abstract test case description for 'TC\_SECC\_BandSupport\_004'.

**Table 31 — Abstract test case description for 'TC\_SECC\_BandSupport\_004'**

<b>TC Id</b>	TC_SECC_BandSupport_004
<b>Test purpose</b>	<p>In case of an SECC controlling only one power outlet at a time (PIXIT_SECC_NUMOUTLETS), this TC observes whether 5 GHz band support according to ISO 15118-8:2020, Table 2 is provided by the APUT.</p> <p>Prerequisite: No prerequisite.</p> <p>Pre-condition: The APUT is ready to operate as an access point according to IEEE 802.11-2012 on one of the supported channels (PIXIT_SECC_SUPPORTED_CHANNEL_LIST) in the 5 GHz band according to ISO 15118-8:2020, Table 2. NOTE 1 National/regional regulations can apply. See ISO 15118-8:2020, Annex D.</p> <p>The test system (STA) is initialized to a state, where it is configured as a STA without AP capability and ready to monitor Beacon frames from the APUT on all allowed channels in the 5 GHz band according to ISO 15118-8:2020, Table 2. NOTE 2 National/regional regulations can apply. See ISO 15118-8:2020, Annex D.</p> <p>Test behaviour: The test system (STA) starts scanning all allowed channels in the 5 GHz band according to ISO 15118-8:2020, Table 2. NOTE 3 National/regional regulations can apply. See ISO 15118-8:2020, Annex D.</p> <p>The test system then checks whether Beacon frames from the APUT (PIXIT_CMN_MACADDR_5GHz) according to IEEE 802.11-2012 are received and whether APUT replies with association response frame with success flag set in response to the association request frame sent to APUT.</p> <p>Post-condition: APUT and test system (STA) are reset to initial state.</p>
<b>Document reference</b>	ISO 15118-8:2020, 7.2.3
<b>Referenced requirement(s)</b>	[V2G8-007]
<b>Config Id</b>	CF_09_001
<b>PICS selection</b>	

**Table 31** (continued)

<b>PIXIT selection</b>	PIXIT_CMN_MACADDR_5GHz PIXIT_SECC_NUMOUTLETS := one PIXIT_CMN_ETT := 0000x0xx (Bitfield shall NOT include WPT) PIXIT_SECC_SUPPORTED_CHANNEL_LIST
------------------------	---

[Table 32](#) lists the abstract test case description for 'TC\_SECC\_ChannelSupport\_001'.

**Table 32 — Abstract test case description for 'TC\_SECC\_ChannelSupport\_001'**

<b>TC Id</b>	TC_SECC_ChannelSupport_001
<b>Test purpose</b>	<p>This TC observes whether a selected Channel ID is supported by the APUT. This TC shall be repeated for all supported channels ((PIXIT_SECC_SUPPORTED_CHANNEL_LIST) in the 2,4 GHz band according to ISO 15118-8:2020, Table 1, and the APUT shall behave correctly on at least three channels for test verdict 'pass'.</p> <p>Prerequisite: No prerequisite.</p> <p>Pre-condition: The APUT is ready to operate as an access point according to IEEE 802.11-2012 on one supported channel (PIXIT_SECC_CHANNEL_SELECTED) in the 2,4 GHz band according to ISO 15118-8:2020, Table 1.</p> <p>The test system (STA) is initialized to a state, where it is configured as a STA without AP capability and ready to monitor Beacon frames from the APUT on all allowed channels in the 2,4 GHz band according to ISO 15118-8:2020, Table 1.</p> <p>Test behaviour: The test system (STA) starts the scanning process in the 2,4 GHz band according to ISO 15118-8:2020, Table 1. The test system then checks whether Beacon frames from the APUT (PIXIT_CMN_MACADDR_2_4GHz) according to IEEE 802.11-2012 are received and whether connection can be successfully established on agreed channel (PIXIT_SECC_CHANNEL_SELECTED).</p> <p>Post-condition: APUT and test system (STA) are reset to initial state.</p>
<b>Document reference</b>	ISO 15118-8:2020, 7.2.3
<b>Referenced requirement(s)</b>	[V2G8-008]
<b>Config Id</b>	CF_09_001
<b>PICS selection</b>	
<b>PIXIT selection</b>	PIXIT_CMN_MACADDR_2_4GHz PIXIT_SECC_CHANNEL_SELECTED

[Table 33](#) lists the abstract test case description for 'TC\_SECC\_ChannelSupport\_002'.



**Table 33 — Abstract test case description for 'TC\_SECC\_ChannelSupport\_002'**

<b>TC Id</b>	TC_SECC_ChannelSupport_002
<b>Test purpose</b>	<p>This TC observes whether a selected Channel ID is supported by the APUT. This TC shall be repeated for all supported channels ((PIXIT_SECC_SUPPORTED_CHANNEL_LIST) in the 5 GHz band according to ISO 15118-8:2020, Table 2 (national/regional regulations can apply, see ISO 15118-8:2020, Annex D) and the APUT shall behave correctly on at least three channels for test verdict 'pass'.</p> <p>Prerequisite: No prerequisite.</p> <p>Pre-condition: The APUT is ready to operate as an access point according to IEEE 802.11-2012 on one supported channel (PIXIT_SECC_CHANNEL_SELECTED) in the 5 GHz band according to ISO 15118-8:2020, Table 2. NOTE 1 National/regional regulations can apply. See ISO 15118-8:2020, Annex D.</p> <p>The test system (STA) is initialized to a state, where it is configured as a STA without AP capability and ready to monitor Beacon frames from the APUT on all allowed channels in the 5 GHz band according to ISO 15118-8:2020, Table 2. NOTE 2 National/regional regulations can apply. See ISO 15118-8:2020, Annex D.</p> <p>Test behaviour: The test system (STA) starts the scanning process in the 5 GHz band according to ISO 15118-8:2020, Table 2. NOTE 3 National/regional regulations can apply. See ISO 15118-8:2020, Annex D.</p> <p>The test system then checks whether Beacon frames from the APUT (PIXIT_CMN_MACADDR_5GHz) according to IEEE 802.11-2012 are received and whether connection can be successfully established on agreed channel (PIXIT_SECC_CHANNEL_SELECTED).</p> <p>Post-condition: APUT and test system (STA) are reset to initial state.</p>
<b>Document reference</b>	ISO 15118-8:2020, 7.2.3
<b>Referenced requirement(s)</b>	[V2G8-008]
<b>Config Id</b>	CF_09_001
<b>PICS selection</b>	
<b>PIXIT selection</b>	PIXIT_CMN_MACADDR_5GHz PIXIT_SECC_CHANNEL_SELECTED

[Table 34](#) lists the abstract test case description for 'TC\_SECC\_VendorSpecificElement\_001'.

**Table 34 — Abstract test case description for 'TC\_SECC\_VendorSpecificElement\_001'**

<b>TC Id</b>	TC_SECC_VendorSpecificElement_001
--------------	-----------------------------------

**Table 34** (continued)

<b>Test purpose</b>	<p>This TC observes whether the Beacon frames of the APUT contain a well-formed VSE element. If the channel of the APUT can be explicitly set, this test case shall be repeated for all supported channels by the APUT.</p> <p>Prerequisite: No prerequisite.</p> <p>Pre-condition: The APUT is ready to operate as an access point according to IEEE 802.11-2012.</p> <p>The test system (STA) is initialized to a state, where it is configured as a STA without AP capability and ready to monitor Beacon frames from the APUT on all allowed channels according to ISO 15118-8:2020, Tables 1, 2.</p> <p>NOTE 1 National/regional regulations can apply. See ISO 15118-8:2020, Annex D.</p> <p>Test behaviour: The test system (STA) captures incoming frames and checks whether Beacon frames from the APUT (PIXIT_CMN_MACADDR_2_4GHz or PIXIT_CMN_MACADDR_5GHz) according to IEEE 802.11n are received containing a VSE with the following format:</p> <p style="padding-left: 40px;">ElementID: 'DD'H Length: ('11'H .. 'FF'H) OrganizationID: '70B3D53190'H ElementType: '01'H ETT: ett_value Country Code: ? OperatorID: ? ChargingSiteID: ? Additional Information (optional): *</p> <p>and furthermore, compares the value of the length field with the number of bytes received starting from OrganizationID element up to and including Additional Information element.</p> <p>Post-condition: APUT and test system (STA) are reset to initial state.</p> <p>NOTE 2 In case the Beacon frame includes multiple VSEs with or without OrganizationID: '70B3D53190'H the test system checks whether there is at least one VSE conforming to the format defined above.</p>
<b>Document reference</b>	ISO 15118-8:2020, 7.2.6
<b>Referenced requirement(s)</b>	[V2G8-018]
<b>Config Id</b>	CF_09_001
<b>PICS selection</b>	

**Table 34 (continued)**

<b>PIXIT selection</b>	PIXIT_CMN_MACADDR_2_4GHz
	PIXIT_CMN_MACADDR_5GHz
	PIXIT_CMN_ETT := ett_value

[Table 35](#) lists the abstract test case description for 'TC\_SECC\_VendorSpecificElement\_002'.

**Table 35 — Abstract test case description for 'TC\_SECC\_VendorSpecificElement\_002'**

<b>TC Id</b>	TC_SECC_VendorSpecificElement_002
--------------	-----------------------------------

STANDARDSISO.COM : Click to view the full PDF of ISO 15118-9:2022

**Table 35 (continued)**

<b>Test purpose</b>	<p>This TC observes whether the probe response frames of the APUT contain a well-formed VSE element. If the channel of the APUT can be explicitly set, this test case shall be repeated for all supported channels by the APUT.</p> <p>Prerequisite: No prerequisite.</p> <p>Pre-condition: The APUT is ready to operate as an access point according to IEEE 802.11-2012.</p> <p>The test system (STA) is initialized to a state, where it is configured as a STA without AP capability and ready to monitor Beacon frames from the APUT on all allowed channels according to ISO 15118-8:2020, Tables 1, 2.</p> <p>NOTE 1 National/regional regulations can apply. See ISO 15118-8:2020, Annex D.</p> <p>Test behaviour: The test system (STA) sends a probe request frame according to active scanning procedure as defined IEEE 802.11-2012 containing a VSE with the following format:</p> <p style="margin-left: 40px;">ElementID: 'DD'H Length: ('07'H) OrganizationID: '70B3D53190'H ElementType: '02'H ETT: ett_value</p> <p>The test system then checks whether a probe response frame from the APUT (PIXIT_CMN_MACADDR_2_4GHz or PIXIT_CMN_MACADDR_5GHz) according to IEEE 802.11-2012 is received containing a VSE with the following format:</p> <p style="margin-left: 40px;">ElementID: 'DD'H Length: ('11'H..'FF'H) OrganizationID: '70B3D53190'H ElementType: '01'H ETT: ett_value Country Code: ? OperatorID: ? ChargingSiteID: ? Additional Information (optional): *</p> <p>and furthermore, compares the value of the length field with the number of bytes received starting from OrganizationID element up to and including Additional Information element.</p> <p>Post-condition: APUT and test system (STA) are reset to initial state.</p> <p>NOTE 2 In case the probe response frame includes multiple VSEs with or without OrganizationID: '70B3D53190'H the test system checks whether there is at least one VSE conforming to the format defined above.</p>
<b>Document reference</b>	ISO 15118-8:2020, 7.2.6
<b>Referenced requirement(s)</b>	[V2G8-019]

**Table 35 (continued)**

<b>Config Id</b>	CF_09_001
<b>PICS selection</b>	
<b>PIXIT selection</b>	PIXIT_CMN_MACADDR_2_4GHz PIXIT_CMN_MACADDR_5GHz PIXIT_CMN_ETT := ett_value

[Table 36](#) lists the abstract test case description for 'TC\_SECC\_VendorSpecificElement\_003'.

**Table 36 — Abstract test case description for 'TC\_SECC\_VendorSpecificElement\_003'**

<b>TC Id</b>	TC_SECC_VendorSpecificElement_003
--------------	-----------------------------------

**Table 36** (continued)

<b>Test purpose</b>	<p>In case the additional information element is sent by the APUT, this TC observes whether the Beacon frames of the APUT contain a well-formed additional information in the VSE element. If the channel of the APUT can be explicitly set, this test case shall be repeated for all supported channels by the APUT.</p> <p>Prerequisite: APUT implements Additional Information in VSE element in Beacon frames.</p> <p>Pre-condition: The APUT is ready to operate as an access point according to IEEE 802.11-2012.</p> <p>The test system (STA) is initialized to a state, where it is configured as a STA without AP capability and ready to monitor Beacon frames from the APUT on all allowed channels according to ISO 15118-8:2020, Tables 1, 2.</p> <p>NOTE 1 National/regional regulations can apply. See ISO 15118-8:2020, Annex D.</p> <p>Test behaviour: The test system (STA) captures incoming frames and checks whether Beacon frames from the APUT (PIXIT_CMN_MACADDR_2_4GHz or PIXIT_CMN_MACADDR_5GHz) according to IEEE 802.11n are received containing a VSE with additional information and with the following format:</p> <p style="margin-left: 40px;">ElementID: ? Length: ? OrganizationID: ? ElementType: ? ETT: ? Country Code: ? OperatorID: ? ChargingSiteID: ? Additional Information: addinf_value</p> <p>Post-condition: APUT and test system (STA) are reset to initial state.</p> <p>NOTE 2 In case the Beacon frame includes multiple VSEs with or without Organization-ID: '70B3D53190'H the test system checks whether there is at least one VSE conforming to the format defined above.</p>
<b>Document reference</b>	ISO 15118-8:2020, 7.2.6
<b>Referenced requirement(s)</b>	[V2G8-020]
<b>Config Id</b>	CF_09_001
<b>PICS selection</b>	

**Table 36 (continued)**

<b>PIXIT selection</b>	PIXIT_CMN_MACADDR_2_4GHz
	PIXIT_CMN_MACADDR_5GHz
	PIXIT_CMN_ADDINF := addinf_value

[Table 37](#) lists the abstract test case description for 'TC\_SECC\_VendorSpecificElement\_004'.

**Table 37 — Abstract test case description for 'TC\_SECC\_VendorSpecificElement\_004'**

<b>TC Id</b>	TC_SECC_VendorSpecificElement_004
--------------	-----------------------------------

STANDARDSISO.COM : Click to view the full PDF of ISO 15118-9:2022

**Table 37** (continued)

<b>Test purpose</b>	<p>In case the Additional Information element is sent by the APUT, this TC observes whether the probe response frames of the APUT contain a well-formed Additional Information in the VSE element. If the channel of the APUT can be explicitly set, this test case shall be repeated for all supported channels by the APUT.</p> <p>Prerequisite: APUT implements Additional Information in VSE element in probe response frames.</p> <p>Pre-condition: The APUT is ready to operate as an access point according to IEEE 802.11-2012.</p> <p>The test system (STA) is initialized to a state, where it is configured as a STA without AP capability and ready to monitor Beacon frames from the APUT on all allowed channels according to ISO 15118-8:2020, Tables 1, 2.</p> <p>NOTE 1 National/regional regulations can apply. See ISO 15118-8:2020, Annex D.</p> <p>Test behaviour: The test system (STA) sends a probe request frame according to active scanning procedure as defined IEEE 802.11-2012 containing a VSE with the following format:</p> <p style="margin-left: 40px;">ElementID: 'DD'H Length: ('07'H) OrganizationID: '70B3D53190'H ElementType: '02'H ETT: ett_value</p> <p>The test system then checks whether a probe response frame from the APUT (PIXIT_CMN_MACADDR_2_4GHz or PIXIT_CMN_MACADDR_5GHz) according to IEEE 802.11-2012 is received containing a VSE with the following format:</p> <p style="margin-left: 40px;">ElementID: ? Length: ? OrganizationID: ? ElementType: ? ETT: ? Country Code: ? OperatorID: ? ChargingSiteID: ? Additional Information: addinf_value</p> <p>Post-condition: APUT and test system (STA) are reset to initial state.</p> <p>NOTE 2 In case the probe response frame includes multiple VSEs with or without OrganizationID: '70B3D53190'H the test system checks whether there is at least one VSE conforming to the format defined above.</p> <p>NOTE 3 According to [V2G8-020] in ISO 15118-8 the order of ETT and parameter values in the Additional Information element does not have an impact on the test verdict.</p>
<b>Document reference</b>	ISO 15118-8:2020, 7.2.6
<b>Referenced requirement(s)</b>	[V2G8-020]



**Table 37 (continued)**

<b>Config Id</b>	CF_09_001
<b>PICS selection</b>	
<b>PIXIT selection</b>	PIXIT_CMN_MACADDR_2_4GHz PIXIT_CMN_MACADDR_5GHz PIXIT_CMN_ADDINF := addinf_value

### 8.3 EVCC test cases

[Table 38](#) lists the abstract test case description for 'TC\_EVCC\_Scanning\_001'.

**Table 38 — Abstract test case description for 'TC\_EVCC\_Scanning\_001'**

<b>TC Id</b>	TC_EVCC_Scanning_001
--------------	----------------------

**Table 38** (continued)

<b>Test purpose</b>	<p>This TC observes whether the STAUT establishes a connection to an AP.</p> <p>Prerequisite: No prerequisite.</p> <p>Pre-condition: The STAUT is initialized to a state, where it is configured as a STA without AP capability and ready to start the association process according to IEEE 802.11-2012 on all allowed channels.</p> <p>The test system is ready to operate as an access point according to IEEE 802.11-2012 supporting HT capabilities and HT operation on one of the allowed channels in the 2,4 GHz band according to ISO 15118-8:2020, Table 1 or 5 GHz band according to ISO 15118-8:2020, Table 2.</p> <p>NOTE National/regional regulations can apply. See ISO 15118-8:2020, Annex D.</p> <p>Test behaviour: The test system (AP) starts sending Beacon frames and/or probe response frame according to IEEE 802.11-2012 with valid VSE element with the following format:</p> <p style="margin-left: 40px;">ElementID: 'DD'H Length: '11'H OrganizationID: '70B3D53190'H ElementType: '01'H ETT: '0F'H Country Code: country_code OperatorID: operator_id ChargingSiteID: charging_site</p> <p>on the channel selected by the test system (AP).</p> <p>The test system (AP) then captures incoming frames and checks whether an association request frame from the STAUT (PIXIT_CMN_MACADDR_2_4GHz or PIXIT_CMN_MACADDR_5GHz depending on the selected channel) according to IEEE 802.11n is received.</p> <p>Post-condition: STAUT and test system (AP) are reset to initial state.</p>
<b>Document reference</b>	ISO 15118-8:2020, 7.3.2
<b>Referenced requirement(s)</b>	[V2G8-023]
<b>Config Id</b>	CF_09_001
<b>PICS selection</b>	

**Table 38 (continued)**

<b>PIXIT selection</b>	PIXIT_CMN_MACADDR_2_4GHz PIXIT_CMN_MACADDR_5GHz PIXIT_CMN_COUNTRY_CODE := country_code PIXIT_CMN_OPERATOR_ID := operator_id PIXIT_CMN_CHARGING_SITE_ID := charging_site
------------------------	---

[Table 39](#) lists the abstract test case description for 'TC\_EVCC\_Scanning\_002'.

**Table 39 — Abstract test case description for 'TC\_EVCC\_Scanning\_002'**

<b>TC Id</b>	TC_EVCC_Scanning_002
--------------	----------------------

**Table 39** (continued)

<b>Test purpose</b>	<p>This TC observes whether the association request frames of the STAUT contain the HT Capabilities element. This test case shall be repeated for all allowed Channel IDs one after another in the 2,4 GHz band according to ISO 15118-8:2020, Table 1 for a test verdict 'pass'.</p> <p>Prerequisite: No prerequisite.</p> <p>Pre-condition: The STAUT is initialized to a state, where it is configured as a STA without AP capability and ready to start the association process according to IEEE 802.11-2012 on all allowed channels in the 2,4 GHz band according to ISO 15118-8:2020, Table 1.</p> <p>The test system is ready to operate as an access point according to IEEE 802.11-2012 supporting HT Capabilities and HT Operation on one of the allowed channels in the 2,4 GHz band according to ISO 15118-8:2020, Table 1.</p> <p>Test behaviour: The test system (AP) sends any Beacon frame and/or probe response frame according to IEEE 802.11-2012 with valid VSE element with the following format:</p> <p style="margin-left: 40px;">ElementID: 'DD'H Length: '11'H OrganizationID: '70B3D53190'H ElementType: '01'H ETT: '0F'H Country Code: country_code OperatorID: operator_id ChargingSiteID: charging_site</p> <p>on the channel selected by the test system (AP).</p> <p>The test system (AP) then captures incoming frames and checks whether association request frames from the STAUT (PIXIT_CMN_MACADDR_2_4GHz) according to IEEE 802.11n are received containing the HT Capabilities element.</p> <p>Post-condition: STAUT and test system (AP) are reset to initial state.</p>
<b>Document reference</b>	ISO 15118-8:2020, 7.3.2
<b>Referenced requirement(s)</b>	[V2G8-024]
<b>Config Id</b>	CF_09_001
<b>PICS selection</b>	

**Table 39 (continued)**

<b>PIXIT selection</b>	PIXIT_CMN_MACADDR_2_4GHz PIXIT_CMN_COUNTRY_CODE := country_code PIXIT_CMN_OPERATOR_ID := operator_id PIXIT_CMN_CHARGING_SITE_ID := charging_site
------------------------	---

[Table 40](#) lists the abstract test case description for 'TC\_EVCC\_Scanning\_003'.

**Table 40 — Abstract test case description for 'TC\_EVCC\_Scanning\_003'**

<b>TC Id</b>	TC_EVCC_Scanning_003
--------------	----------------------

**Table 40** (continued)

<b>Test purpose</b>	<p>This TC observes whether the association request frames of the STAUT contain the HT Capabilities element. This test case shall be repeated for all allowed Channel IDs one after another in the 5 GHz band according to ISO 15118-8:2020, Table 2 (national/regional regulations can apply, see ISO 15118-8:2020, Annex D) for test verdict 'pass'.</p> <p>Prerequisite: No prerequisite.</p> <p>Pre-condition: The STAUT is initialized to a state, where it is configured as a STA without AP capability and ready to start the association process according to IEEE 802.11-2012 on all allowed channels in the 5 GHz band according to ISO 15118-8:2020, Table 2. NOTE 1 National/regional regulations can apply. See ISO 15118-8:2020, Annex D.</p> <p>The test system is ready to operate as an access point according to IEEE 802.11-2012 supporting HT Capabilities and HT Operation on one of the allowed channels in the 5 GHz band according to ISO 15118-8:2020, Table 2. NOTE 2 National/regional regulations can apply. See ISO 15118-8:2020, Annex D.</p> <p>Test behaviour: The test system (AP) sends any Beacon frame and/or probe response frame according to IEEE 802.11-2012 with valid VSE element with the following format:</p> <p style="margin-left: 40px;">ElementID: 'DD'H Length: '11'H OrganizationID: '70B3D53190'H ElementType: '01'H ETT: '0F'H Country Code: country_code OperatorID: operator_id ChargingSiteID: charging_site</p> <p>on the channel selected by the test system (AP).</p> <p>The test system (AP) then captures incoming frames and checks whether association request frames from the STAUT (PIXIT_CMN_MACADDR_5GHz) according to IEEE 802.11n are received containing the HT Capabilities.</p> <p>Post-condition: STAUT and test system (AP) are reset to initial state.</p>
<b>Document reference</b>	ISO 15118-8:2020, 7.3.2
<b>Referenced requirement(s)</b>	[V2G8-024]
<b>Config Id</b>	CF_09_001
<b>PICS selection</b>	

**Table 40 (continued)**

<b>PIXIT selection</b>	PIXIT_CMN_MACADDR_5GHz PIXIT_CMN_COUNTRY_CODE := country_code PIXIT_CMN_OPERATOR_ID := operator_id PIXIT_CMN_CHARGING_SITE_ID := charging_site
------------------------	---

[Table 41](#) lists the abstract test case description for 'TC\_EVCC\_Scanning\_004'.

**Table 41 — Abstract test case description for 'TC\_EVCC\_Scanning\_004'**

<b>TC Id</b>	TC_EVCC_Scanning_004
<b>Test purpose</b>	<p>This TC observes whether the probe request frames of the STAUT contain the HT Capabilities element. This test case shall be repeated for all allowed Channel IDs one after another in the 2,4 GHz according to ISO 15118-8:2020, Table 1 for a test verdict 'pass'.</p> <p>Prerequisite: No prerequisite.</p> <p>Pre-condition: The STAUT is initialized to a state, where it is configured as a STA without AP capability and ready to start the association process through active scanning (PIXIT_EVCC_SCANNING_MODE) according to IEEE 802.11-2012 on all allowed channels in the 2,4 GHz band according to ISO 15118-8:2020, Table 1.</p> <p>The test system is ready to monitor probe request frames from the STAUT on one of the allowed channels in the 2,4 GHz band according to ISO 15118-8:2020, Table 1.</p> <p>Test behaviour: The test system captures incoming frames on the channel selected by the test system and checks whether probe request frames according to IEEE 802.11n are received from the STAUT (PIXIT_CMN_MACADDR_2_4GHz) containing the HT Capabilities element.</p> <p>Post-condition: STAUT and test system are reset to initial state.</p>
<b>Document reference</b>	ISO 15118-8:2020, 7.3.2
<b>Referenced requirement(s)</b>	[V2G8-024]
<b>Config Id</b>	CF_09_002
<b>PICS selection</b>	
<b>PIXIT selection</b>	PIXIT_CMN_MACADDR_2_4GHz PIXIT_CMN_COUNTRY_CODE := country_code PIXIT_CMN_OPERATOR_ID := operator_id PIXIT_CMN_CHARGING_SITE_ID := charging_site PIXIT_EVCC_SCANNING_MODE := active

[Table 42](#) lists the abstract test case description for 'TC\_EVCC\_Scanning\_005'.

**Table 42 — Abstract test case description for 'TC\_EVCC\_Scanning\_005'**

<b>TC Id</b>	TC_EVCC_Scanning_005
<b>Test purpose</b>	<p>This TC observes whether the probe request frames of the STAUT contain the HT Capabilities element. This test case shall be repeated for all allowed Channel IDs one after another in the 5 GHz according to ISO 15118-8:2020, Table 2 (national/regional regulations can apply, see ISO 15118-8:2020, Annex D) for test verdict 'pass'.</p> <p>Prerequisite: No prerequisite.</p> <p>Pre-condition: The STAUT is initialized to a state, where it is configured as a STA without AP capability and ready to start the Association process through active scanning (PIXIT_EVCC_SCANNING_MODE) according to IEEE 802.11-2012 on all allowed channels in the 5 GHz band according to ISO 15118-8:2020, Table 2.</p> <p>NOTE 1 National/regional regulations can apply. See ISO 15118-8:2020, Annex D.</p> <p>The test system is ready to monitor probe request frames from the STAUT on one of the allowed channels in the 5 GHz band according to ISO 15118-8:2020, Table 2.</p> <p>NOTE 2 National/regional regulations can apply. See ISO 15118-8:2020, Annex D.</p> <p>Test behaviour: The test system captures incoming frames on the channel selected by the test system and checks whether probe request frames according to IEEE 802.11n are received from the STAUT (PIXIT_CMN_MACADDR_5GHz) containing the HT Capabilities element.</p> <p>Post-condition: STAUT and test system are reset to initial state.</p>
<b>Document reference</b>	ISO 15118-8:2020, 7.3.2
<b>Referenced requirement(s)</b>	[V2G8-024]
<b>Config Id</b>	CF_09_002
<b>PICS selection</b>	
<b>PIXIT selection</b>	<p>PIXIT_CMN_MACADDR_5GHz</p> <p>PIXIT_CMN_COUNTRY_CODE := country_code</p> <p>PIXIT_CMN_OPERATOR_ID := operator_id</p> <p>PIXIT_CMN_CHARGING_SITE_ID := charging_site</p> <p>PIXIT_EVCC_SCANNING_MODE := active</p>

[Table 43](#) lists the abstract test case description for 'TC\_EVCC\_Scanning\_006'.

**Table 43 — Abstract test case description for 'TC\_EVCC\_Scanning\_006'**

<b>TC Id</b>	TC_EVCC_Scanning_006
--------------	----------------------



**Table 43** (continued)

<b>Test purpose</b>	<p>This TC observes whether passive scanning is performed by the STAUT for one selected Channel ID. This test case shall be performed for one allowed Channel ID in the 2,4 GHz band according to ISO 15118-8:2020, Table 1 for a test verdict 'pass'.</p> <p>Prerequisite: The STAUT implemented passive scanning mode.</p> <p>Pre-condition: The STAUT is initialized to a state, where it is configured as a STA without AP capability and ready to start the association process through passive scanning (PIXIT_EVCC_SCANNING_MODE) according to IEEE 802.11-2012 on all allowed channels in the 2,4 GHz band according to ISO 15118-8:2020, Table 1.</p> <p>The test system is ready to operate as an access point according to IEEE 802.11-2012 supporting HT Capabilities and HT Operation on one of the allowed channels in the 2,4 GHz band according to ISO 15118-8:2020, Table 1.</p> <p>Test behaviour: The test system (AP) starts sending Beacon frames according to IEEE 802.11-2012 with valid VSE element with the following format:</p> <p style="margin-left: 40px;">ElementID: 'DD'H Length: '11'H OrganizationID: '70B3D53190'H ElementType: '01'H ETT: '0F'H Country Code: country_code OperatorID: operator_id ChargingSiteID: charging_site</p> <p>on the channel selected by the test system (AP).</p> <p>The test system (AP) captures incoming frames and checks whether an association request frame from the STAUT (PIXIT_CMN_MACADDR_2_4GHz) according to IEEE 802.11n is received. The test system (AP) also checks that no probe request frame from the STAUT (PIXIT_CMN_MACADDR_2_4GHz) according to IEEE 802.11n is received.</p> <p>Post-condition: STAUT and test system (AP) are reset to initial state.</p>
<b>Document reference</b>	ISO 15118-8:2020, 7.3.2
<b>Referenced requirement(s)</b>	[V2G8-025]
<b>Config Id</b>	CF_09_002
<b>PICS selection</b>	

**Table 43** (continued)

<b>PIXIT selection</b>	PIXIT_CMN_MACADDR_2_4GHz PIXIT_CMN_COUNTRY_CODE := country_code PIXIT_CMN_OPERATOR_ID := operator_id PIXIT_CMN_CHARGING_SITE_ID := charging_site PIXIT_EVCC_SCANNING_MODE := passive
------------------------	--

[Table 44](#) lists the abstract test case description for 'TC\_EVCC\_Scanning\_007'.

**Table 44 — Abstract test case description for 'TC\_EVCC\_Scanning\_007'**

<b>TC Id</b>	TC_EVCC_Scanning_007
--------------	----------------------

STANDARDSISO.COM : Click to view the full PDF of ISO 15118-9:2022

**Table 44** (continued)

<b>Test purpose</b>	<p>This TC observes whether passive scanning is performed by the STAUT for one selected Channel ID. This test case shall be performed for one allowed Channel ID in the 5 GHz band according to ISO 15118-8:2020, Table 2 (national/regional regulations can apply, see ISO 15118-8:2020, Annex D) for test verdict 'pass'.</p> <p>Prerequisite: The STAUT implemented passive scanning mode.</p> <p>Pre-condition: The STAUT is initialized to a state, where it is configured as a STA without AP capability and ready to start the association process through passive scanning (PIXIT_EVCC_SCANNING_MODE) according to IEEE 802.11-2012 on all allowed channels in the 5 GHz band according to ISO 15118-8:2020, Table 2.</p> <p>NOTE 1 National/regional regulations can apply. See ISO 15118-8:2020, Annex D.</p> <p>The test system is ready to operate as an access point according to IEEE 802.11-2012 supporting HT Capabilities and HT Operation on one of the allowed channels in the 5 GHz band according to ISO 15118-8:2020, Table 2.</p> <p>NOTE 2 National/regional regulations can apply. See ISO 15118-8:2020, Annex D.</p> <p>Test behaviour: The test system (AP) starts sending Beacon frames according to IEEE 802.11-2012 with valid VSE element with the following format:</p> <p style="margin-left: 40px;">ElementID: 'DD'H Length: '11'H OrganizationID: '70B3D53190'H ElementType: '01'H ETT: '0F'H Country Code: country_code OperatorID: operator_id ChargingSiteID: charging_site</p> <p>on the channel selected by the test system (AP).</p> <p>The test system (AP) captures incoming frames and checks whether an association request frame from the STAUT (PIXIT_CMN_MACADDR_5GHz) according to IEEE 802.11n is received. The test system (AP) also checks that no probe request frame from the STAUT (PIXIT_CMN_MACADDR_5GHz) according to IEEE 802.11n is received.</p> <p>Post-condition: STAUT and test system (AP) are reset to initial state.</p>
<b>Document reference</b>	ISO 15118-8:2020, 7.3.2
<b>Referenced requirement(s)</b>	[V2G8-025]
<b>Config Id</b>	CF_09_002
<b>PICS selection</b>	

**Table 44 (continued)**

<b>PIXIT selection</b>	PIXIT_CMN_MACADDR_5GHz PIXIT_CMN_COUNTRY_CODE := country_code PIXIT_CMN_OPERATOR_ID := operator_id PIXIT_CMN_CHARGING_SITE_ID := charging_site PIXIT_EVCC_SCANNING_MODE := passive
------------------------	--

[Table 45](#) lists the abstract test case description for 'TC\_EVCC\_Scanning\_008'.

**Table 45 — Abstract test case description for 'TC\_EVCC\_Scanning\_008'**

<b>TC Id</b>	TC_EVCC_Scanning_008
<b>Test purpose</b>	<p>This TC observes whether active scanning is performed by the STAUT for one selected Channel ID in the 2,4 GHz band according to ISO 15118-8:2020, Table 1.</p> <p>Prerequisite: The STAUT implemented active scanning mode.</p> <p>Pre-condition: The STAUT is initialized to a state, where it is configured as a STA without AP capability and ready to start the association process through active scanning (PIXIT_EVCC_SCANNING_MODE) according to IEEE 802.11-2012 on all allowed channels in the 2,4 GHz band according to ISO 15118-8:2020, Table 1.</p> <p>The test system is ready to monitor probe request frames from the STAUT on one of the allowed channels in the 2,4 GHz band according to ISO 15118-8:2020, Table 1.</p> <p>Test behaviour: The test system captures incoming frames on the channel selected by the test system and checks whether probe request frames according to IEEE 802.11n are received from the STAUT (PIXIT_CMN_MACADDR_2_4GHz).</p> <p>Post-condition: STAUT and test system are reset to initial state.</p>
<b>Document reference</b>	ISO 15118-8:2020, 7.3.2
<b>Referenced requirement(s)</b>	[V2G8-025]
<b>Config Id</b>	CF_09_002
<b>PICS selection</b>	
<b>PIXIT selection</b>	PIXIT_CMN_MACADDR_2_4GHz PIXIT_EVCC_SCANNING_MODE := active

[Table 46](#) lists the abstract test case description for 'TC\_EVCC\_Scanning\_009'.

**Table 46 — Abstract test case description for 'TC\_EVCC\_Scanning\_009'**

<b>TC Id</b>	TC_EVCC_Scanning_009
--------------	----------------------

**Table 46 (continued)**

<b>Test purpose</b>	<p>This TC observes whether active scanning is performed by the STAUT for one selected Channel ID in the 5 GHz band according to ISO 15118-8:2020, Table 2.</p> <p>NOTE 1 National/regional regulations can apply. See ISO 15118-8:2020, Annex D.</p> <p>Prerequisite: The STAUT implemented active scanning mode.</p> <p>Pre-condition: The STAUT is initialized to a state, where it is configured as a STA without AP capability and ready to start the association process through active scanning (PIXIT_EVCC_SCANNING_MODE) according to IEEE 802.11-2012 on all allowed channels in the 5 GHz band according to ISO 15118-8:2020, Table 2.</p> <p>NOTE 2 National/regional regulations can apply. See ISO 15118-8:2020, Annex D.</p> <p>The test system is ready to monitor probe request frames from STAUT on one of the allowed channels in the 5 GHz band according to ISO 15118-8:2020, Table 2.</p> <p>NOTE 3 National/regional regulations can apply. See ISO 15118-8:2020, Annex D.</p> <p>Test behaviour: The test system captures incoming frames on the channel selected by the test system and checks whether probe request frames according to IEEE 802.11n are received from the STAUT (PIXIT_CMN_MACADDR_5GHz).</p> <p>Post-condition: STAUT and test system are reset to initial state.</p>
<b>Document reference</b>	ISO 15118-8:2020, 7.3.2
<b>Referenced requirement(s)</b>	[V2G8-025]
<b>Config Id</b>	CE_09_002
<b>PICS selection</b>	
<b>PIXIT selection</b>	<p>PIXIT_CMN_MACADDR_5GHz</p> <p>PIXIT_EVCC_SCANNING_MODE := active</p>

[Table 47](#) lists the abstract test case description for 'TC\_EVCC\_BandSupport\_001'.

**Table 47 — Abstract test case description for 'TC\_EVCC\_BandSupport\_001'**

<b>TC Id</b>	TC_EVCC_BandSupport_001
--------------	-------------------------

**Table 47** (continued)

<b>Test purpose</b>	<p>This TC observes whether a selected Channel ID is scanned through passive scanning method by the STAUT in the 2,4 GHz band. This test case shall be repeated for all allowed Channel IDs one after another in the 2,4 GHz band according to ISO 15118-8:2020, Table 1 for test verdict 'pass'.</p> <p>Prerequisite: No prerequisite.</p> <p>Pre-condition: The STAUT is initialized to a state, where it is configured as a STA without AP capability and ready to start the association process according to IEEE 802.11-2012 on all allowed channels in the 2,4 GHz band according to ISO 15118-8:2020, Table 1.</p> <p>The test system is ready to operate as an access point according to IEEE 802.11-2012 supporting HT Capabilities and HT Operation on one of the allowed channels in the 2,4 GHz band according to ISO 15118-8:2020, Table 1.</p> <p>Test behaviour: The test system (AP) starts sending Beacon frames according to IEEE 802.11-2012 with valid VSE element with the following format:</p> <p style="margin-left: 40px;">ElementID: 'DD'H Length: '11'H OrganizationID: '70B3D53190'H ElementType: '01'H ETT: '0F'H Country Code: country_code OperatorID: operator_id ChargingSiteID: charging_site</p> <p>on the channel selected by the test system (AP).</p> <p>The test system (AP) captures incoming frames and checks whether an association request frame from the STAUT (PIXIT_CMN_MACADDR_2_4GHz) according to IEEE 802.11n is received. The test system (AP) also checks that no probe request frame from the STAUT (PIXIT_CMN_MACADDR_2_4GHz) according to IEEE 802.11n is received.</p> <p>Post-condition: STAUT and test system (AP) are reset to initial state.</p>
<b>Document reference</b>	ISO 15118-8:2020, 7.3.3
<b>Referenced requirement(s)</b>	<p>[V2G8-026] → pass if successful for at least one allowed channel, fail otherwise</p> <p>[V2G8-027] → pass if successful for all allowed channels, fail otherwise</p> <p>[V2G8-028] → pass if successful for all allowed channels, fail otherwise</p>
<b>Config Id</b>	CF_09_002
<b>PICS selection</b>	

**Table 47 (continued)**

<b>PIXIT selection</b>	PIXIT_CMN_MACADDR_2_4GHz PIXIT_CMN_COUNTRY_CODE := country_code PIXIT_CMN_OPERATOR_ID := operator_id PIXIT_CMN_CHARGING_SITE_ID := charging_site PIXIT_EVCC_SCANNING_MODE := passive
------------------------	--

[Table 48](#) lists the abstract test case description for 'TC\_EVCC\_BandSupport\_002'.

**Table 48 — Abstract test case description for 'TC\_EVCC\_BandSupport\_002'**

<b>TC Id</b>	TC_EVCC_BandSupport_002
--------------	-------------------------

**Table 48** (continued)

<b>Test purpose</b>	<p>This TC observes whether a selected Channel ID is scanned through passive scanning by the STAUT in the 5 GHz band. This test case shall be repeated for all allowed Channel IDs one after another in the 5 GHz band according to ISO 15118-8:2020, Table 2 (national/regional regulations can apply, see ISO 15118-8:2020, Annex D) for test verdict 'pass'.</p> <p>Prerequisite: No prerequisite.</p> <p>Pre-condition: The STAUT is initialized to a state, where it is configured as a STA without AP capability and ready to start the association process according to IEEE 802.11-2012 on all allowed channels in the 5 GHz band according to ISO 15118-8:2020, Table 2. NOTE 1 National/regional regulations can apply. See ISO 15118-8:2020, Annex D.</p> <p>The test system is ready to operate as an access point according to IEEE 802.11-2012 supporting HT Capabilities and HT Operation on one of the allowed channels in the 5 GHz band according to ISO 15118-8:2020, Table 2. NOTE 2 National/regional regulations can apply. See ISO 15118-8:2020, Annex D.</p> <p>Test behaviour: The test system (AP) starts sending Beacon frames according to IEEE 802.11-2012 with valid VSE element with the following format:</p> <p style="margin-left: 40px;">ElementID: 'DD'H Length: '11'H OrganizationID: '70B3D53190'H ElementType: '01'H ETT: '0F'H Country Code: country_code OperatorID: operator_id ChargingSiteID: charging_site</p> <p>on the channel selected by the test system (AP).</p> <p>The test system (AP) captures incoming frames and checks whether an association request frame from the STAUT (PIXIT_CMN_MACADDR_5GHz) according to IEEE 802.11n is received. The test system (AP) also checks that no probe request frame from the STAUT (PIXIT_CMN_MACADDR_5GHz) according to IEEE 802.11n is received.</p> <p>Post-condition: STAUT and test system (AP) are reset to initial state.</p>
<b>Document reference</b>	ISO 15118-8:2020, 7.3.3
<b>Referenced requirement(s)</b>	<p>[V2G8-026] → pass if successful for at least one allowed channel, fail otherwise</p> <p>[V2G8-027] → pass if successful for all allowed channels, fail otherwise</p> <p>[V2G8-028] → pass if successful for all allowed channels, fail otherwise</p>
<b>Config Id</b>	CF_09_002