

INTERNATIONAL STANDARD

ISO
296

Second edition
1991-04-01

Machine tools — Self-holding tapers for tool shanks

Machines-outils — Cônes pour emmanchements d'outils à faible conicité



Reference number
ISO 296:1991(E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 296 was prepared by Technical Committee ISO/TC 39, *Machine tools*.

This second edition cancels and replaces the first edition (ISO 296:1974), of which it constitutes a technical revision.

STANDARDSISO.COM : Click to view the full PDF of ISO 296:1991

© ISO 1991

All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case Postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

Machine tools — Self-holding tapers for tool shanks

1 Scope

This International Standard specifies the dimensions of self-holding tapers for tool shanks with a small taper of about 4% to 5%, classified, according to their use, into the three following categories:

- a) tapers for general use;
- b) smaller tapers;
- c) larger tapers.

For the first category, tapers recommended by ISO are Nos. 1 to 6 Morse tapers. Their standard sizes in millimetres are given in table 2, and the corresponding sizes in inches are given in table 3.

For smaller and larger tapers, those recommended by ISO are, on the one hand, Nos. 4 and 6 metric 5% tapers and No. 0 Morse taper, and on the other hand, Nos. 80 to 200 metric 5% tapers, the sizes of which, in millimetres only, are given in table 2. However, it was agreed to include in parallel, in the category of small tapers, Nos. 1 to 3 Brown & Sharpe tapers, the sizes of which, in inches only, are given in table 3.

Consequently, as shown in table 1, the self-holding tapers dealt with in this International Standard include

- a) for general use, only Nos. 1 to 6 Morse tapers;
- b) for sizes below No. 1 Morse taper, two solutions, i.e. either Nos. 4 and 6 metric tapers and No. 0 Morse taper (without corresponding tapers in inches in table 3) or, alternatively, Nos. 1 to 3 Brown & Sharpe tapers (without corresponding tapers in millimetres in table 2);
- c) for sizes above No. 6 Morse taper, only Nos. 80 to 200 metric tapers (without corresponding tapers in inches in table 3).

Table 1 — Tapers

Designation	Sizes in millimetres	Sizes in inches
Small tapers	Nos. 4 and 6 metric and No. 0 Morse	Nos. 1 to 3 Brown & Sharpe
Tapers for general use	Nos. 1 to 6 Morse ¹⁾	
Large tapers	Nos. 80 to 200 metric	—
1) Except for threads, Nos. 1 to 6 Morse tapers, manufactured either to metric values or to inch values, are strictly interchangeable, though not absolutely identical.		

This International Standard provides, for those elements which are threaded, two entirely distinct types of product according to the type of thread, **M** or **UNC**.

In order to distinguish between those two types, it is important that the element itself be marked with the corresponding thread symbol and the type of taper symbol, as shown in the figures in clause 4.

Lastly, this International Standard specifies the dimensions of grooves and holes necessary for the design of tapers for applications where coolant supply is required.

2 Normative reference

The following standard contains provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the edition indicated was valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent edition of the standard indicated below.

Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 1947:1973, *System of cone tolerances for conical workpieces from $C = 1:3$ to $1:500$ and lengths from 6 to 630 mm.*

3 Conicity tolerances

The cone angle tolerances shall be those given in ISO 1947 for quality AT5, and shall be positive on the external taper and negative on the internal taper.

For special applications, other cone angle tolerances in accordance with ISO 1947 may be chosen.

STANDARDSISO.COM : Click to view the full PDF of ISO 296:1991

4 Dimensions

Tolerances of symmetry in millimetres



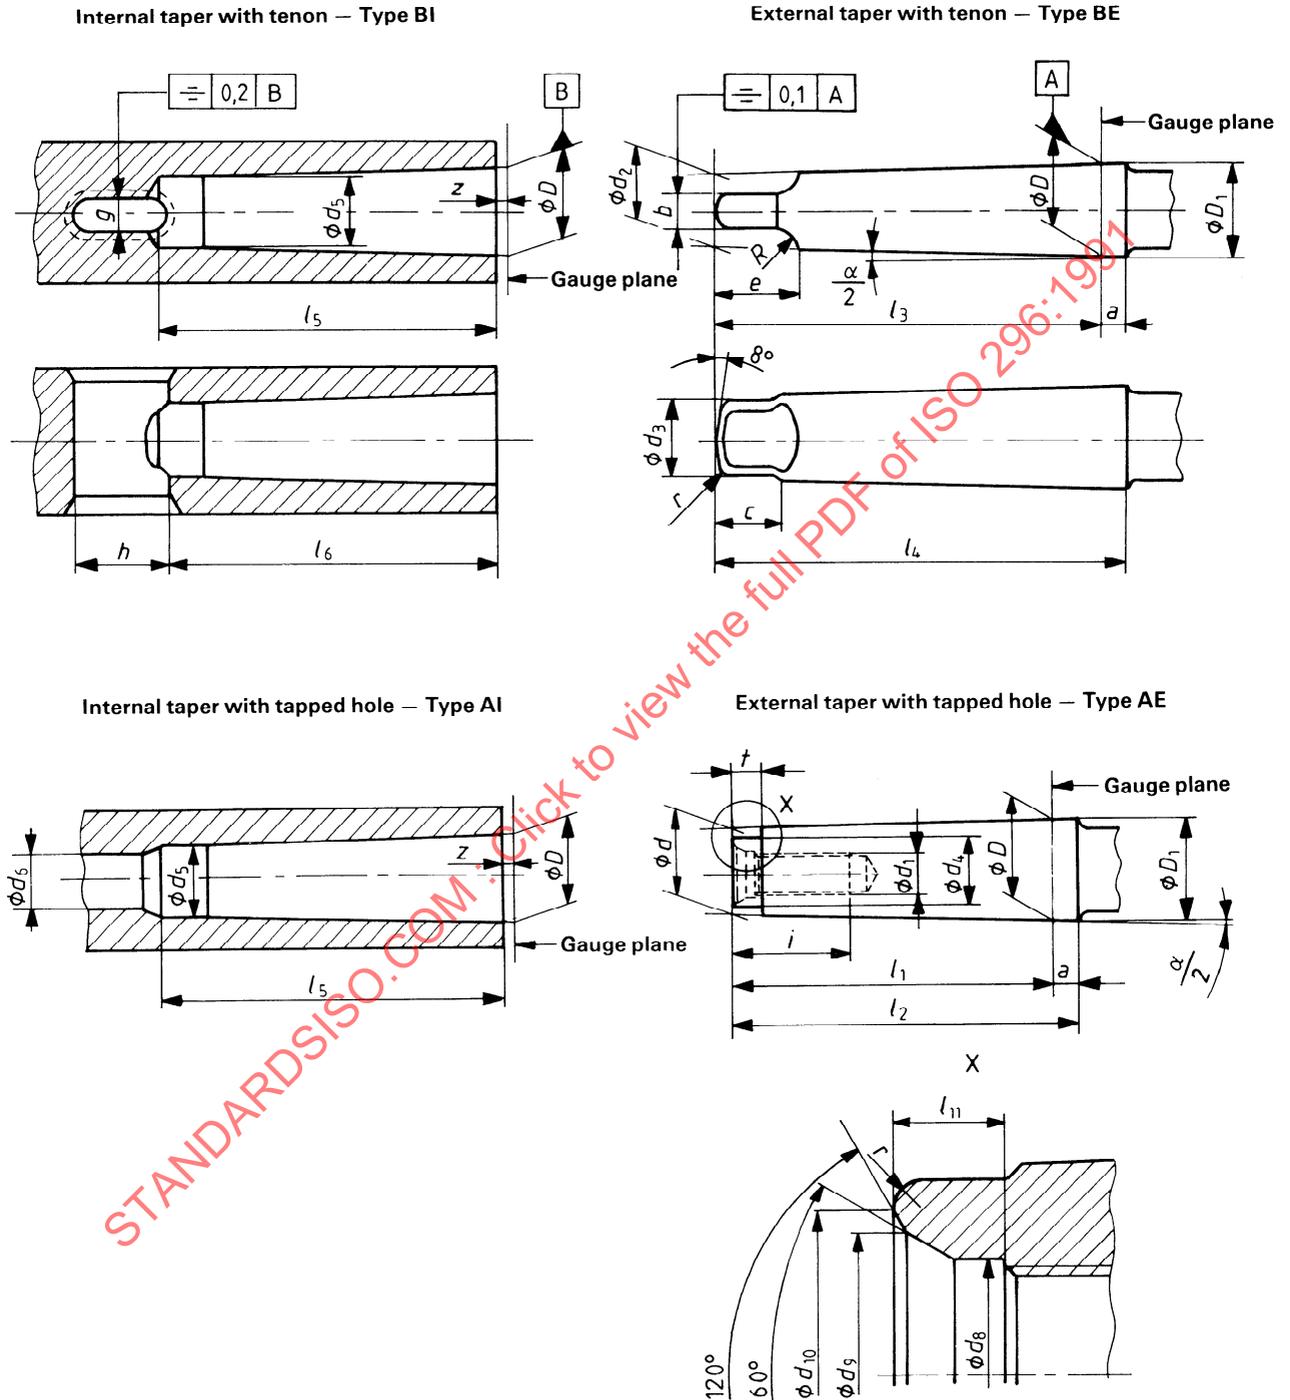


Figure 1

Tolerances of symmetry in millimetres

Internal taper with tenon and coolant supply – Type BIK

External taper with tenon and coolant supply – Type BEK

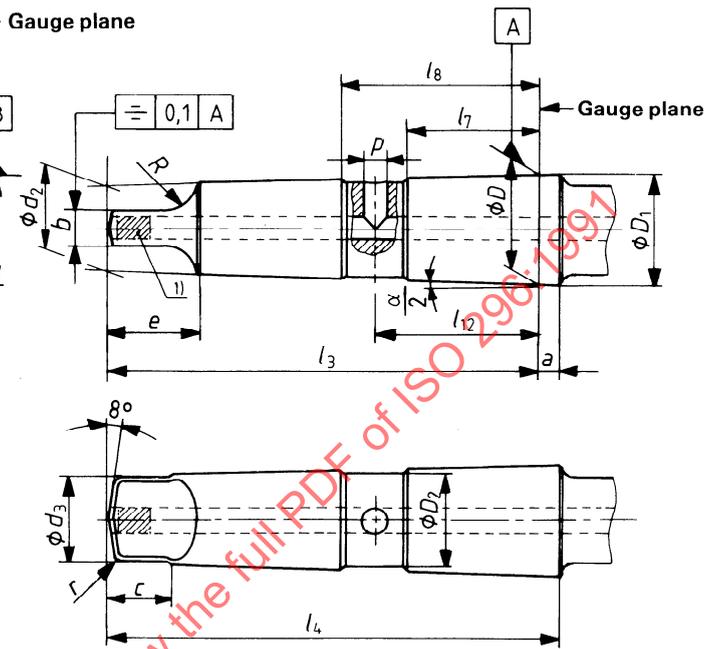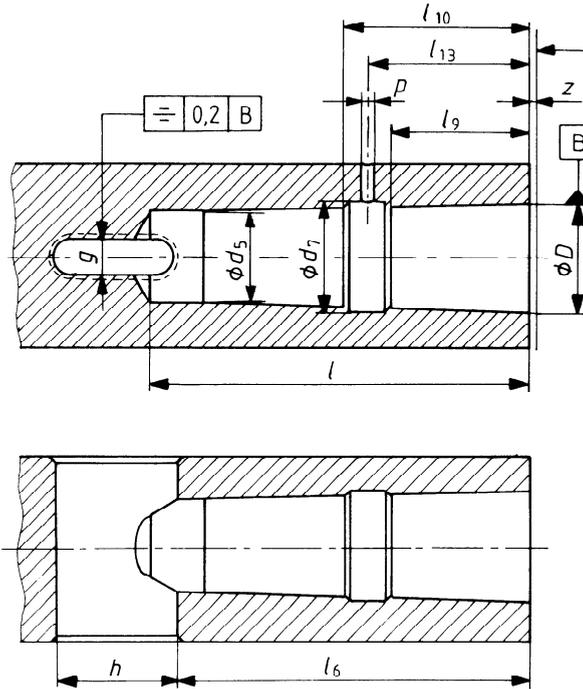

1) Optional cap.

Internal taper with tapped hole and coolant supply – Type AIK

External taper with tapped hole and coolant supply – Type AEK

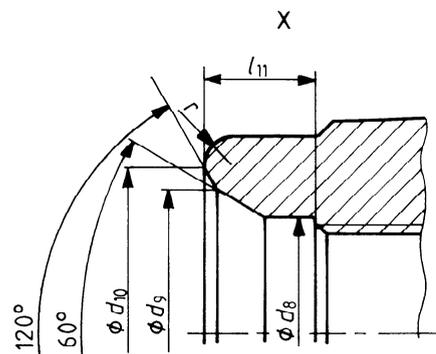
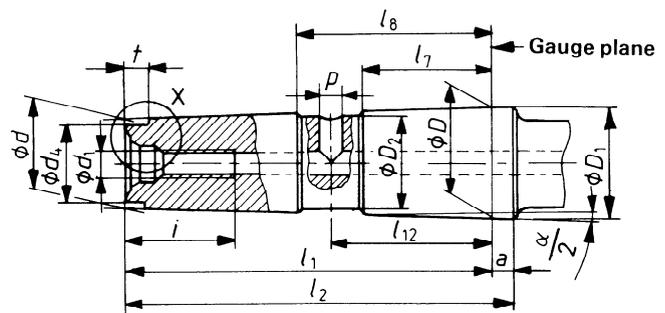
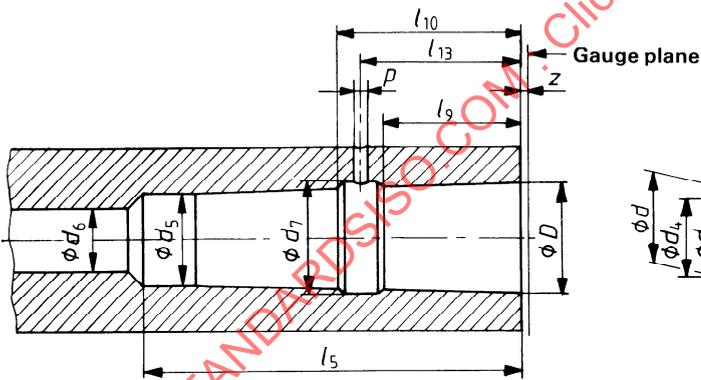


Figure 2

Table 2 — Nos. 0 to 6 Morse tapers and 5 % metric tapers

Dimensions in millimetres

Designation	Metric tapers		Morse tapers						Metric tapers						
	4	6	0	1	2	3	4	5	6	80	100	120	160	200	
Taper ratio	1:20 = 0,05		0,624 6:12 = 1:19,212 = 0,052 05	0,598 58:12 = 1:20,047 = 0,049 88	0,599 41:12 = 1:20,02 = 0,049 95	0,602 35:12 = 1:19,922 = 0,050 2	0,623 26:12 = 1:19,254 = 0,051 94	0,631 51:12 = 1:19,002 = 0,052 63	0,625 65:12 = 1:19,18 = 0,052 14	1:20 = 0,05					
External taper	D	6	9,045	12,065	17,78	23,925	31,267	44,399	63,348	80	100	120	160	200	
	d_5	4	3	3,5	5	5	6,5	8	8	8	10	12	16	20	
	d_6	2	3	3,5	5	5	6,5	8	8	8	10	12	16	20	
	D_1	4,1	6,2	12,2	24,1	31,6	44,7	63,8	80,4	100,5	120,6	160,8	201	251	
	D_2	—	—	15	21	28	40	56	70,2	88,4	108,6	143	179,4	226	
	d_1	2,9	4,4	9,4	14,6	19,8	25,9	37,6	48,3	61,6	78,8	102,1	131,4	166,7	
	d_2	—	—	6,4	9,4	12,5	17,2	23,6	29,9	38,4	49,6	64,8	84,9	110,9	
	d_3	—	—	6,1	9,1	12,1	16,8	23,2	29,5	37,6	48,8	64,0	84,1	110,1	
	d_4	—	—	6	9	12,5	17,5	24,5	31,5	40,5	52,5	69,5	91,5	119,5	
	max.	—	—	8,7	13,5	18,5	25,5	35,7	45,7	58,7	76,7	100,7	130,7	172,7	
	min.	—	—	6,4	9,4	12,4	17,4	23,4	29,4	37,4	48,4	63,4	83,4	109,4	
	d_8	—	—	8	12,5	17,5	24,5	32,5	41,5	52,5	68,5	90,5	118,5	156,5	
	d_9	—	—	8	12,5	17,5	24,5	32,5	41,5	52,5	68,5	90,5	118,5	156,5	
	d_{10}	—	—	8	12,5	17,5	24,5	32,5	41,5	52,5	68,5	90,5	118,5	156,5	
	d_{11}	—	—	8	12,5	17,5	24,5	32,5	41,5	52,5	68,5	90,5	118,5	156,5	
	d_{12}	—	—	8	12,5	17,5	24,5	32,5	41,5	52,5	68,5	90,5	118,5	156,5	
	l_1	23	32	53,5	81	102,5	129,5	169,5	211,5	268,5	340,5	432,5	550,5	706,5	
	l_2	25	35	57	86	109	136	181,5	228,5	292,5	374,5	478,5	610,5	782,5	
	l_3	—	—	62	94	117,5	149,5	199,5	251,5	323,5	415,5	531,5	681,5	877,5	
	l_4	—	—	65,5	99	124,5	161,5	215,5	273,5	351,5	451,5	581,5	747,5	963,5	
	l_5	—	—	—	20	29	39	51	67	88	114	148	192	248	
	l_6	—	—	—	34	43	55	69	90	118	156	204	264	338	
	l_7	—	—	—	5	5,5	8,2	10	11,5	15,5	20,5	27,5	36,5	47,5	
	l_8	—	—	—	4	4	6	8	9	12	16	21	28	36	
	l_9	—	—	—	—	—	—	—	—	—	—	—	—	—	
	l_{10}	—	—	—	—	—	—	—	—	—	—	—	—	—	
	l_{11}	—	—	—	—	—	—	—	—	—	—	—	—	—	
	l_{12}	—	—	—	—	—	—	—	—	—	—	—	—	—	
	p	—	—	3,3	5	6,8	9,5	12,5	16,5	21,5	28,5	37,5	48,5	62,5	
	b	—	—	5,2	7,9	10,6	14,1	18,1	23,1	29,1	37,1	47,1	59,1	75,1	
	c	—	—	8,5	13	17,5	23,5	30,5	39,5	50,5	64,5	82,5	105,5	135,5	
	e	—	—	13,5	20,5	27,5	36,5	46,5	58,5	74,5	94,5	120,5	154,5	198,5	
	i	—	—	16	24	32	42	53	66	83	105	134	171	219	
	R	—	—	4	7	9	12	16	20	26	33	42	53	67	
	r	—	—	1,2	2	2,5	3,5	4,5	5,5	7,5	9,5	12,5	16,5	21,5	
	t	—	—	5	7	9	12	16	20	26	33	42	53	67	
Internal taper	d_5	3	4,6	9,7	14,9	20,2	26,5	38,2	54,8	71,5	90	108,5	145,5	182,5	
	d_6	—	—	7	11,5	14	18	23	27	33	39	48,5	62,5	80,5	
	d_7	—	—	19,5	24,5	32	41,5	52,5	63	79	99	126	162	208	
	l_5	25	34	56	84	107	135	188	242	308	396	504	648	832	
	l_6	21	29	52	78	98	125	177	228	292	372	472	600	772	
	l_7	—	—	32	41	53	67	83	102	128	164	212	272	348	
	l_8	—	—	—	32	41	53	67	83	102	128	164	212	272	
	l_9	—	—	—	32	41	53	67	83	102	128	164	212	272	
	l_{10}	—	—	—	32	41	53	67	83	102	128	164	212	272	
	l_{11}	—	—	—	32	41	53	67	83	102	128	164	212	272	
	g	2,2	3,2	3,9	5,2	6,3	7,9	10,1	12,5	16,1	20,1	25,1	31,1	39,1	
	h	8	12	15	22	27	35	44	55	69	87	110	139	176	
	p	—	—	4,2	6,8	8,5	11,2	14,5	18,5	23,5	29,5	37,5	47,5	59,5	
	z	0,5	0,5	1	1	1	1	1	1	1,5	1,5	1,5	2	2	

1) For D_1 and d or d_2 , approximate values are given for guidance.
 (The actual values result from the actual values of a and l_1 or l_3 respectively, taking into account the taper ratio and the basic size D .)
 2) d_1 is the nominal thread diameter; either a metric thread **M** with standard pitch or, if expressly stated, a **UNC** thread (see table 3 for inch sizes). In every case, the appropriate symbol **M** or **UNC** shall be marked on the component.
 3) It is permissible to increase the length c over which the tenon is turned to diameter d_3 , but without exceeding e .
 4) z is the maximum permissible deviation, outwards only, of the position of the gauge plane related to the basic size D from the nominal position of coincidence with the leading face.

Table 3 — Nos. 1 to 6 Morse tapers and Nos. 1 to 3 Brown & Sharpe tapers

Dimensions in inches

Designation	Brown & Sharpe tapers			Morse tapers					
	1	2	3	1	2	3	4	5	6
Taper ratio	0,502 : 12 = 1 : 23,904 = 0,041 83	0,502 : 12 = 1 : 23,904 = 0,041 83	0,502 : 12 = 1 : 23,904 = 0,041 83	0,598 58 : 12 = 1 : 20,047 = 0,049 88	0,599 41 : 12 = 1 : 20,02 = 0,049 95	0,602 35 : 12 = 1 : 19,922 = 0,050 2	0,623 26 : 12 = 1 : 19,254 = 0,051 94	0,631 51 : 12 = 1 : 19,002 = 0,052 63	0,625 65 : 12 = 1 : 19,18 = 0,052 14
External taper									
D	0,239 22	0,299 68	0,375 25	0,475	0,7	0,938	1,231	1,748	2,494
a	3/32	3/32	3/32	1/8	3/16	3/16	1/4	1/4	1/8
D_1	0,243 14	0,303 6	0,379 17	0,481 2	0,709 4	0,947 4	1,244	1,761 2	2,510 3
D_2	—	—	—	0,393 7	0,590 6	0,826 8	1,102 4	1,574 8	2,204 7
d	—	0,25	0,312 5	0,369	0,572	0,778	1,02	1,475	2,116
d_1	—	—	—	UNC 1/4	UNC 3/8	UNC 1/2	UNC 5/8	UNC 5/8	UNC 1
d_2	0,189 54	0,236 93	0,296 81	0,353 4	0,553 3	0,752 9	0,990 8	1,438 8	2,063 9
d_3	11/64	7/32	9/32	11/32	17/32	23/32	31/32	1 13/32	2
d_4	11/64	7/32	9/32	11/32	17/32	23/32	31/32	1 13/32	2
d_5	—	—	—	0,251 97	0,413 38	0,511 81	0,669 29	0,826 77	1,023 62
d_6	—	—	—	0,314 96	0,492 12	0,590 55	0,787 4	1,023 62	1,220 47
d_7	—	—	—	0,334 64	0,519 68	0,689 29	0,866 14	1,181 1	1,417 32
d_8	—	—	—	2 1/8	2 9/16	3 3/16	4 1/16	5 7/16	7 1/4
d_9	—	—	—	2 1/4	2 3/4	3 3/8	4 5/16	5 7/16	7 9/16
d_{10}	—	—	—	2 7/16	2 15/16	3 11/16	4 5/8	5 7/8	8 1/4
l_1	1 1/16	1 3/16	1 1/2	2 1/4	2 3/4	3 3/8	4 5/16	5 7/16	8 1/4
l_2	1 1/32	1 9/32	1 19/32	2 1/4	2 3/4	3 3/8	4 5/16	5 7/16	8 1/4
l_3	1 3/16	1 1/2	1 7/8	2 7/16	2 15/16	3 11/16	4 5/8	5 7/8	8 1/4
l_4	1 9/32	1 19/32	1 31/32	2 9/16	3 1/8	3 7/8	4 7/8	6 1/8	8 9/16
l_7	—	—	—	19/32	25/32	1 9/64	1 17/32	2	3 3/16
l_8	—	—	—	1 3/16	1 11/32	1 19/64	2 3/16	2 23/32	3 29/32
l_{11}	—	—	—	0,157 48	0,196 85	0,216 53	0,322 83	0,393 7	0,452 75
l_{12}	—	—	—	—	1,062 99	1,417 32	1,850 39	2,362 2	3,543 3
p	—	—	—	—	11/64	13/64	9/32	21/64	13/32
b	0,125	0,156 2	0,187 5	1/8	11/64	13/64	9/32	21/64	13/32
c	1/4	5/16	3/8	0,203 1	0,25	0,312 5	0,468 7	0,625	0,75
e	0,381	0,455	0,532	11/32	13/32	17/32	5/8	3/4	1 1/16
i	min.	—	—	0,52	0,66	0,83	1,14	1,15	1,58
R	3/16	3/16	3/16	1/2	3/4	0,944 88	1 1/4	1 1/4	1,850 4
r	1/32	1/32	3/64	3/16	1/4	9/32	5/16	0,472 44	0,708 66
t	1/8	1/8	1/8	3/64	1/16	5/64	3/32	1/8	5/32
Internal taper									
d_5	0,203	0,255	0,319	0,378	0,568	0,797	1,044	1,502	2,157 48
d_6	—	—	—	9/32	7/16	9/16	11/16	11/16	1 1/8
d_7	—	—	—	17/32	49/64	31/32	1 17/64	1 47/64	2 31/64
l_5	1	1 1/4	1 9/16	2 3/16	2 21/32	3 9/32	4 5/32	5 5/16	7 3/8
l_6	29/32	1 1/8	1 13/32	2 1/16	2 1/2	3 1/16	3 7/8	4 15/16	7
l_9	—	—	—	43/64	7/8	17/32	1 39/64	2 3/32	3 17/64
l_{10}	—	—	—	1 1/16	1 17/64	1 39/64	2 3/32	2 41/64	3 13/16
l_{13}	—	—	—	—	1,062 99	1,417 32	1,850 39	2,362 2	3,543 3
g	0,141	0,172	0,203	0,223	0,27	0,333	0,493	0,65	0,78
h	13/32	9/16	23/32	3/4	7/8	1 1/8	1 1/4	1 1/2	1 7/8
p	—	—	—	1/8	11/64	13/64	9/32	21/64	13/32
z	0,04	0,04	0,04	0,039 3	0,039 3	0,039 3	0,039 3	0,039 3	0,039 3

1) For D_1 and d or d_2 , approximate values are given for guidance.
 (The actual values result from the actual values of a and l_1 or l_3 respectively, taking into account the taper ratio and the basic size D .)
 2) d_1 is the nominal thread diameter; either a UNC thread or, if expressly stated, a metric thread M with standard pitch (see table 2 for metric sizes). In every case, the appropriate symbol UNC or M shall be marked on the component.
 3) It is permissible to increase the length c over which the tenon is turned to diameter d_5 , but without exceeding e .
 4) z is the maximum permissible deviation, outwards only, of the position of the gauge plane related to the basic size D from the nominal position of coincidence with the leading face.

This page intentionally left blank

STANDARDSISO.COM : Click to view the full PDF of ISO 296:1997