


REV.
C

AS21152

NOTICE

THIS SPECIFICATION SHEET COVERS SEALED, SELF-ALIGNING, AIRFRAME, ANTI-FRICTION, DOUBLE ROW, HOLLOW SHANK, ROD END BALL BEARINGS WITH APPLICATION IN TEMPERATURE RANGES OF -65°F TO 300°F.

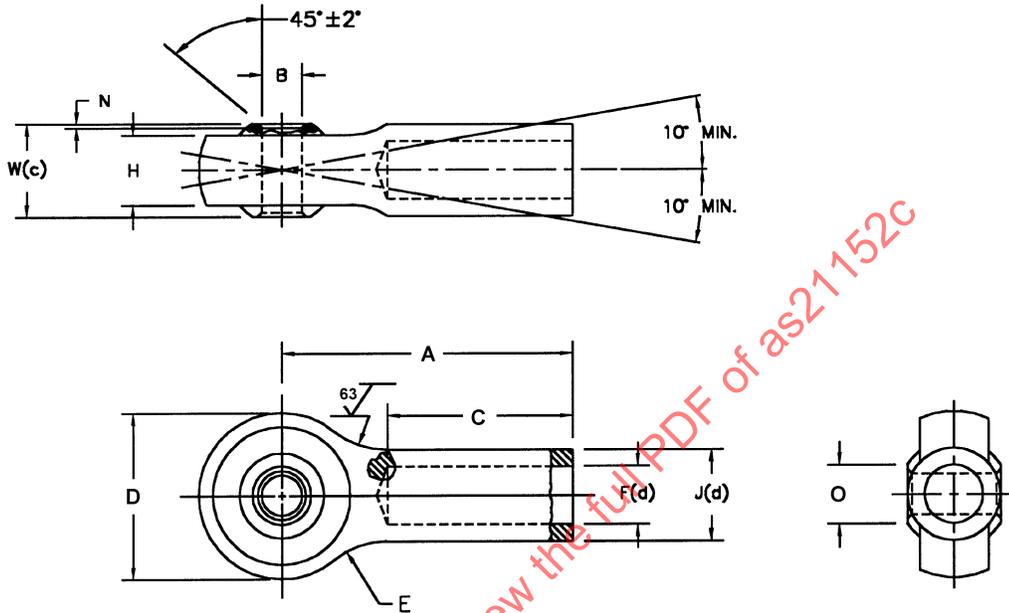

MS21152 DASH NUMBER	BORE SIZE NOM.	A	B	C	D	E	F	H	J (d)		N (a)	O	W (c)	WGT LBS. APPROX.
		±.010	+.0000 -.0003 DIA.	±.031	±.010	NOM. RAD.	±.010 (d)	±.010	DIA.		+.015 -.000	MIN. DIA.	+.000 -.005	
-1	3/16	1.375	.1900	.875	.781	.390	.272	.328	.430	.428	.005	.276	.437	.06
-2	1/4	1.875	.2500	1.219	.938	.490	.386	.438	.625	.623		.340	.593	.12
-3		1.625		.875		.500	.515		.436	.625				.08
-4		1.875	.760	.468	.346	.436	.12							
-5		1.125	.500	.500	.623	.09								

FIGURE 1

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

SAENORM.COM: Click to view the full PDF of as21152c

ISSUED 1998-01 REVISED 2001-07

PREPARED BY AIRFRAME CONTROL BEARINGS GROUP

PROCUREMENT SPECIFICATION: AS6039



AEROSPACE STANDARD

BEARING, BALL, ROD END, DOUBLE ROW,
PRECISION, HOLLOW SHANK, SELF-ALIGNING,
AIRFRAME, TYPE III, -65° TO 300°F

AS21152
SHEET 1 OF 2

**REV.
C**