

REV.
B

AS9464

THE INITIAL SAE PUBLICATION OF THIS DOCUMENT WAS TAKEN DIRECTLY FROM U.S. MILITARY STANDARD MS9464. THIS SAE STANDARD RETAINS THE SAME PART NUMBERS ESTABLISHED BY THE ORIGINAL MILITARY DOCUMENT.

ANY REQUIREMENTS ASSOCIATED WITH QUALIFIED PRODUCTS LISTS (QPL) MAY CONTINUE TO BE MANDATORY FOR DOD CONTRACTS. REQUIREMENTS RELATING TO QPL'S HAVE NOT BEEN ADOPTED BY THE SAE FOR THIS STANDARD AND ARE NOT PART OF THIS SAE DOCUMENT.


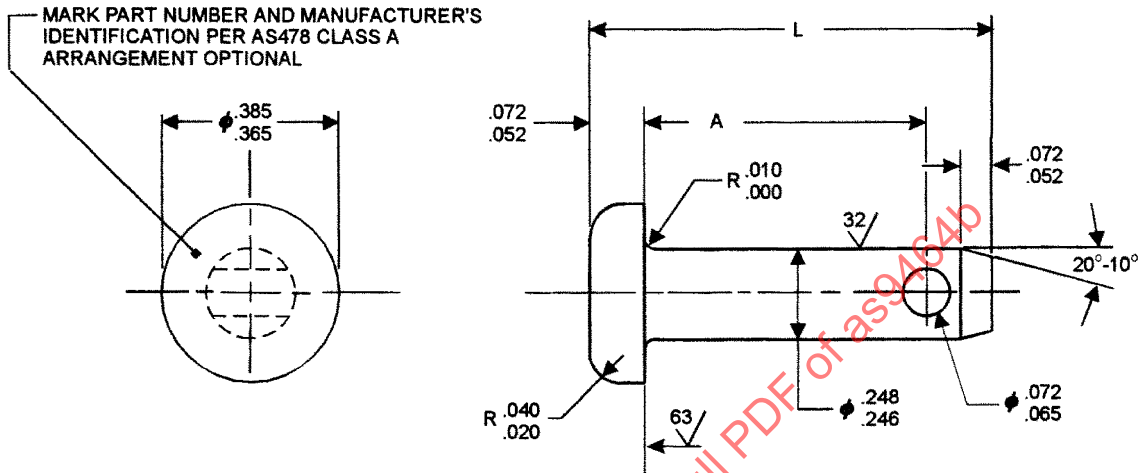


TABLE 1 - PART NUMBERS AND DIMENSIONS

PART NO.	A	L	APPROX. MASS LB/100	PART NO.	A	L	APPROX. MASS LB/100
MS9464-06	.368 - .388	.537 - .557	.86	MS9464-21	1.305 - 1.325	1.474 - 1.494	2.14
MS9464-07	.430 - .450	.599 - .619	.94	MS9464-22	1.368 - 1.388	1.537 - 1.557	2.22
MS9464-08	.493 - .513	.662 - .682	1.03	MS9464-23	1.430 - 1.450	1.599 - 1.619	2.31
MS9464-09	.555 - .575	.724 - .744	1.12	MS9464-24	1.493 - 1.513	1.662 - 1.682	2.39
MS9464-10	.618 - .638	.787 - .807	1.20	MS9464-25	1.555 - 1.575	1.724 - 1.744	2.48
MS9464-11	.680 - .700	.849 - .869	1.29	MS9464-26	1.618 - 1.638	1.787 - 1.807	2.56
MS9464-12	.743 - .763	.912 - .932	1.37	MS9464-27	1.680 - 1.700	1.849 - 1.869	2.65
MS9464-13	.805 - .825	.974 - .994	1.46	MS9464-28	1.743 - 1.763	1.912 - 1.932	2.73
MS9464-14	.868 - .888	1.037 - 1.057	1.54	MS9464-29	1.805 - 1.825	1.974 - 1.994	2.82
MS9464-15	.930 - .950	1.099 - 1.119	1.63	MS9464-30	1.868 - 1.888	2.037 - 2.057	2.90
MS9464-16	.993 - 1.013	1.162 - 1.182	1.71	MS9464-31	1.930 - 1.950	2.099 - 2.119	2.99
MS9464-17	1.055 - 1.075	1.224 - 1.242	1.80	MS9464-32	1.993 - 2.013	2.162 - 2.182	3.07
MS9464-18	1.118 - 1.138	1.287 - 1.307	1.88				
MS9464-19	1.180 - 1.200	1.349 - 1.369	1.97				
MS9464-20	1.243 - 1.263	1.412 - 1.432	2.05				

THIRD ANGLE PROJECTION



PREPARED BY SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSION SYSTEMS

SAE Aerospace
An SAE International Group**AEROSPACE STANDARD**PIN, STRAIGHT, HEADED,
.248 DIAMETER,
CRES, UNS S66286**AS9464**
SHEET 1 OF 2**REV.
B**