


AEROSPACE STANDARD

AS 963A

Issued 10-31-67 Revised 10-1-69

Society of Automotive Engineers, Inc.

DRIVE - STUDDED, ACCESSORY, 5.000 BC ROUND, DESIGN STANDARD FOR

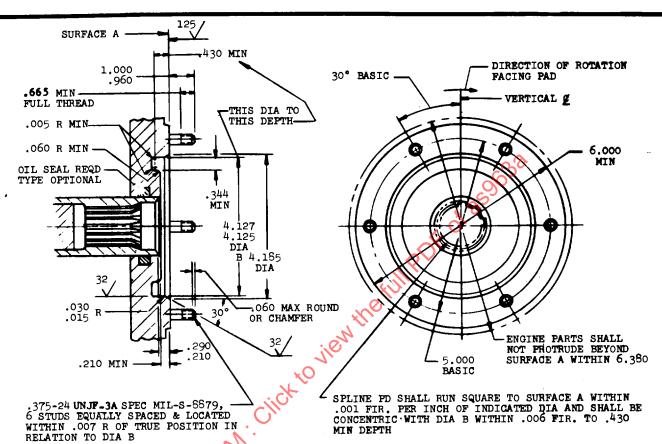

		ON.	RATED		ACCESSORY	
(A)	DASH NO.	POWER HP	SPEED RPM ±5%	SPLINE SIZE PD	WEIGHT LB MAX	STATIC OVERHUNG MOMENT LB IN. MAX
C	-11V -12V	35 35	9000 12000	0.800 0.800	80 50	500 300

(A)								
		RATED		C DY TAVE	ACCESSORY			
	DASH No.	RATED TORQUE LB IN.	SPEED RPM ±5%	SPLINE SIZE PD	WEIGHT LB MAX	STATIC OVERHUNG MOMENT LB IN. MAX		
	-1CT -2CT -3CT -4CT	500 1000 1500 1500	\$000 4000 6000 4000	0.800 1.200 1.200 1.200	25 30 50 7 5	125 200 350 625		

(ه					ACCESSORY		
	DASH NO.	RATED POWER HP	RATED SPEED RPM	SPLINE SIZE PD	WEIGHT LB MAX	STATIC OVERHUNG MOMENT LB IN. MAX	
	-1CS -2CS	3 0 30	8000 12000	0.500 0.500	55 50	350 250	

