

---

---

**Information technology — Security  
techniques — Evaluation criteria for IT  
security —**

**Part 2:  
Security functional requirements**

*Technologies de l'information — Techniques de sécurité — Critères  
d'évaluation pour la sécurité TI —*

*Partie 2: Exigences fonctionnelles de sécurité*

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

© ISO/IEC 1999

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

ISO/IEC Copyright Office • Case postale 56 • CH-1211 Genève 20 • Switzerland  
Printed in Switzerland

## Contents

<b>1</b>	<b>Scope</b> .....	<b>1</b>
1.1	Extending and maintaining functional requirements .....	1
1.2	Organisation of ISO/IEC 15408-2 .....	2
1.3	Functional requirements paradigm .....	2
<b>2</b>	<b>Security functional components</b> .....	<b>9</b>
2.1	Overview .....	9
2.1.1	Class structure .....	9
2.1.2	Family structure .....	10
2.1.3	Component structure .....	11
2.1.4	Permitted functional component operations .....	13
2.2	Component catalogue .....	14
2.2.1	Component changes highlighting .....	15
<b>3</b>	<b>Class FAU: Security audit</b> .....	<b>17</b>
3.1	Security audit automatic response (FAU_ARP) .....	18
3.2	Security audit data generation (FAU_GEN) .....	19
3.3	Security audit analysis (FAU_SAA) .....	21
3.4	Security audit review (FAU_SAR) .....	24
3.5	Security audit event selection (FAU_SEL) .....	26
3.6	Security audit event storage (FAU_STG) .....	27
<b>4</b>	<b>Class FCO: Communication</b> .....	<b>31</b>
4.1	Non-repudiation of origin (FCO_NRO) .....	32
4.2	Non-repudiation of receipt (FCO_NRR) .....	34
<b>5</b>	<b>Class FCS: Cryptographic support</b> .....	<b>37</b>
5.1	Cryptographic key management (FCS_CKM) .....	38
5.2	Cryptographic operation (FCS_COP) .....	41
<b>6</b>	<b>Class FDP: User data protection</b> .....	<b>43</b>
6.1	Access control policy (FDP_ACC) .....	46
6.2	Access control functions (FDP_ACF) .....	48
6.3	Data authentication (FDP_DAU) .....	50
6.4	Export to outside TSF control (FDP_ETC) .....	52
6.5	Information flow control policy (FDP_IFC) .....	54
6.6	Information flow control functions (FDP_IFF) .....	56
6.7	Import from outside TSF control (FDP_ITC) .....	61
6.8	Internal TOE transfer (FDP_ITT) .....	63
6.9	Residual information protection (FDP_RIP) .....	66
6.10	Rollback (FDP_ROL) .....	68
6.11	Stored data integrity (FDP_SDI) .....	70

6.12	Inter-TSF user data confidentiality transfer protection (FDP_UCT) . . . . .	72
6.13	Inter-TSF user data integrity transfer protection (FDP_UIT) . . . . .	73
<b>7</b>	<b>Class FIA: Identification and authentication . . . . .</b>	<b>77</b>
7.1	Authentication failures (FIA_AFL) . . . . .	79
7.2	User attribute definition (FIA_ATD) . . . . .	80
7.3	Specification of secrets (FIA_SOS) . . . . .	81
7.4	User authentication (FIA_UAU) . . . . .	83
7.5	User identification (FIA_UID) . . . . .	88
7.6	User-subject binding (FIA_USB) . . . . .	90
<b>8</b>	<b>Class FMT: Security management . . . . .</b>	<b>91</b>
8.1	Management of functions in TSF (FMT_MOF) . . . . .	93
8.2	Management of security attributes (FMT_MSA) . . . . .	94
8.3	Management of TSF data (FMT_MTD) . . . . .	97
8.4	Revocation (FMT_REV) . . . . .	99
8.5	Security attribute expiration (FMT_SAE) . . . . .	100
8.6	Security management roles (FMT_SMR) . . . . .	101
<b>9</b>	<b>Class FPR: Privacy . . . . .</b>	<b>105</b>
9.1	Anonymity (FPR_ANO) . . . . .	106
9.2	Pseudonymity (FPR_PSE) . . . . .	108
9.3	Unlinkability (FPR_UNL) . . . . .	110
9.4	Unobservability (FPR_UNO) . . . . .	111
<b>10</b>	<b>Class FPT: Protection of the TSF . . . . .</b>	<b>115</b>
10.1	Underlying abstract machine test (FPT_AMT) . . . . .	118
10.2	Fail secure (FPT_FLS) . . . . .	119
10.3	Availability of exported TSF data (FPT_ITA) . . . . .	120
10.4	Confidentiality of exported TSF data (FPT_ITC) . . . . .	121
10.5	Integrity of exported TSF data (FPT_ITI) . . . . .	122
10.6	Internal TOE TSF data transfer (FPT_ITT) . . . . .	124
10.7	TSF physical protection (FPT_PHP) . . . . .	127
10.8	Trusted recovery (FPT_RCV) . . . . .	130
10.9	Replay detection (FPT_RPL) . . . . .	133
10.10	Reference mediation (FPT_RVM) . . . . .	134
10.11	Domain separation (FPT_SEP) . . . . .	135
10.12	State synchrony protocol (FPT_SSP) . . . . .	137
10.13	Time stamps (FPT_STM) . . . . .	139
10.14	Inter-TSF TSF data consistency (FPT_TDC) . . . . .	140
10.15	Internal TOE TSF data replication consistency (FPT_TRC) . . . . .	141
10.16	TSF self test (FPT_TST) . . . . .	142
<b>11</b>	<b>Class FRU: Resource utilisation . . . . .</b>	<b>145</b>
11.1	Fault tolerance (FRU_FLT) . . . . .	146
11.2	Priority of service (FRU_PRS) . . . . .	148
11.3	Resource allocation (FRU_RSA) . . . . .	150
<b>12</b>	<b>Class FTA: TOE access . . . . .</b>	<b>153</b>
12.1	Limitation on scope of selectable attributes (FTA_LSA) . . . . .	154

12.2	Limitation on multiple concurrent sessions (FTA_MCS)	155
12.3	Session locking (FTA_SSL)	157
12.4	TOE access banners (FTA_TAB)	160
12.5	TOE access history (FTA_TAH)	161
12.6	TOE session establishment (FTA_TSE)	162
<b>13</b>	<b>Class FTP: Trusted path/channels</b>	<b>163</b>
13.1	Inter-TSF trusted channel (FTP_ITC)	164
13.2	Trusted path (FTP_TRP)	166
<b>Annex A</b>	<b>Security functional requirements application notes</b>	<b>169</b>
A.1	Structure of the notes	169
A.1.1	Class structure	169
A.1.2	Family structure	170
A.1.3	Component structure	171
A.2	Dependency table	172
<b>Annex B</b>	<b>Functional classes, families, and components</b>	<b>179</b>
<b>Annex C</b>	<b>Security audit (FAU)</b>	<b>181</b>
C.1	Security audit automatic response (FAU_ARP)	183
C.2	Security audit data generation (FAU_GEN)	184
C.3	Security audit analysis (FAU_SAA)	187
C.4	Security audit review (FAU_SAR)	192
C.5	Security audit event selection (FAU_SEL)	194
C.6	Security audit event storage (FAU_STG)	195
<b>Annex D</b>	<b>Communication (FCO)</b>	<b>199</b>
D.1	Non-repudiation of origin (FCO_NRO)	200
D.2	Non-repudiation of receipt (FCO_NRR)	203
<b>Annex E</b>	<b>Cryptographic support (FCS)</b>	<b>207</b>
E.1	Cryptographic key management (FCS_CKM)	209
E.2	Cryptographic operation (FCS_COP)	212
<b>Annex F</b>	<b>User data protection (FDP)</b>	<b>215</b>
F.1	Access control policy (FDP_ACC)	220
F.2	Access control functions (FDP_ACF)	222
F.3	Data authentication (FDP_DAU)	225
F.4	Export to outside TSF control (FDP_ETC)	227
F.5	Information flow control policy (FDP_IFC)	229
F.6	Information flow control functions (FDP_IFF)	232
F.7	Import from outside TSF control (FDP_ITC)	238
F.8	Internal TOE transfer (FDP_ITT)	241
F.9	Residual information protection (FDP_RIP)	245
F.10	Rollback (FDP_ROL)	247
F.11	Stored data integrity (FDP_SDI)	249
F.12	Inter-TSF user data confidentiality transfer protection (FDP_UCT)	251
F.13	Inter-TSF user data integrity transfer protection (FDP_UIT)	252

<b>Annex G</b>	<b>Identification and authentication (FIA)</b> .....	<b>255</b>
G.1	Authentication failures (FIA_AFL) .....	257
G.2	User attribute definition (FIA_ATD) .....	259
G.3	Specification of secrets (FIA_SOS) .....	260
G.4	User authentication (FIA_UAU) .....	262
G.5	User identification (FIA_UID) .....	266
G.6	User-subject binding (FIA_USB) .....	267
<b>Annex H</b>	<b>Security management (FMT)</b> .....	<b>269</b>
H.1	Management of functions in TSF (FMT_MOF) .....	271
H.2	Management of security attributes (FMT_MSA) .....	273
H.3	Management of TSF data (FMT_MTD) .....	276
H.4	Revocation (FMT_REV) .....	278
H.5	Security attribute expiration (FMT_SAE) .....	279
H.6	Security management roles (FMT_SMR) .....	280
<b>Annex I</b>	<b>Privacy (FPR)</b> .....	<b>283</b>
I.1	Anonymity (FPR_ANO) .....	285
I.2	Pseudonymity (FPR_PSE) .....	287
I.3	Unlinkability (FPR_UNL) .....	292
I.4	Unobservability (FPR_UNO) .....	294
<b>Annex J</b>	<b>Protection of the TSF (FPT)</b> .....	<b>299</b>
J.1	Underlying abstract machine test (FPT_AMT) .....	303
J.2	Fail secure (FPT_FLS) .....	305
J.3	Availability of exported TSF data (FPT_ITA) .....	306
J.4	Confidentiality of exported TSF data (FPT_ITC) .....	307
J.5	Integrity of exported TSF data (FPT_ITI) .....	308
J.6	Internal TOE TSF data transfer (FPT_ITT) .....	310
J.7	TSF physical protection (FPT_PHP) .....	312
J.8	Trusted recovery (FPT_RCV) .....	314
J.9	Replay detection (FPT_RPL) .....	317
J.10	Reference mediation (FPT_RVM) .....	318
J.11	Domain separation (FPT_SEP) .....	319
J.12	State synchrony protocol (FPT_SSP) .....	321
J.13	Time stamps (FPT_STM) .....	322
J.14	Inter-TSF TSF data consistency (FPT_TDC) .....	323
J.15	Internal TOE TSF data replication consistency (FPT_TRC) .....	324
J.16	TSF self test (FPT_TST) .....	325
<b>Annex K</b>	<b>Resource utilisation (FRU)</b> .....	<b>327</b>
K.1	Fault tolerance (FRU_FLT) .....	328
K.2	Priority of service (FRU_PRS) .....	330
K.3	Resource allocation (FRU_RSA) .....	331
<b>Annex L</b>	<b>TOE access (FTA)</b> .....	<b>333</b>
L.1	Limitation on scope of selectable attributes (FTA_LSA) .....	334
L.2	Limitation on multiple concurrent sessions (FTA_MCS) .....	335
L.3	Session locking (FTA_SSL) .....	336
L.4	TOE access banners (FTA_TAB) .....	338

L.5	TOE access history (FTA_TAH) .....	339
L.6	TOE session establishment (FTA_TSE) .....	340
<b>Annex M</b>	<b>Trusted path/channels (FTP) .....</b>	<b>341</b>
M.1	Inter-TSF trusted channel (FTP_ITC) .....	342
M.2	Trusted path (FTP_TRP) .....	343

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## List of Figures

Figure 1.1 - Security functional requirements paradigm (Monolithic TOE) .....	3
Figure 1.2 - Diagram of security functions in a distributed TOE .....	4
Figure 1.3 - Relationship between user data and TSF data .....	7
Figure 1.4 - Relationship between “authentication data” and “secrets” .....	8
Figure 2.1 - Functional class structure .....	9
Figure 2.2 - Functional family structure .....	10
Figure 2.3 - Functional component structure .....	12
Figure 2.4 - Sample class decomposition diagram .....	15
Figure 3.1 - Security audit class decomposition .....	17
Figure 4.1 - Communication class decomposition .....	31
Figure 5.1 - Cryptographic support class decomposition .....	37
Figure 6.1 - User data protection class decomposition .....	44
Figure 6.2 - User data protection class decomposition (cont.) .....	45
Figure 7.1 - Identification and authentication class decomposition .....	78
Figure 8.1 - Security management class decomposition .....	92
Figure 9.1 - Privacy class decomposition .....	105
Figure 10.1 - Protection of the TSF class decomposition .....	116
Figure 10.2 - Protection of the TSF class decomposition (Cont.) .....	117
Figure 11.1 - Resource utilisation class decomposition .....	145
Figure 12.1 - TOE access class decomposition .....	153
Figure 13.1 - Trusted path/channels class decomposition .....	163
Figure A.1 - Functional class structure .....	169
Figure A.2 - Functional family structure for application notes .....	170
Figure A.3 - Functional component structure .....	171
Figure C.1 - Security audit class decomposition .....	182
Figure D.1 - Communication class decomposition .....	199
Figure E.1 - Cryptographic support class decomposition .....	207
Figure F.1 - User data protection class decomposition .....	217
Figure F.2 - User data protection class decomposition (cont.) .....	218
Figure G.1 - Identification and authentication class decomposition .....	256
Figure H.1 - Security management class decomposition .....	270
Figure I.1 - Privacy class decomposition .....	283
Figure J.1 - Protection of the TSF class decomposition .....	300
Figure J.2 - Protection of the TSF class decomposition (Cont.) .....	301
Figure K.1 - Resource utilisation class decomposition .....	327
Figure L.1 - TOE access class decomposition .....	333
Figure M.1 - Trusted path/channels class decomposition .....	341

## Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

International Standard ISO/IEC 15408-2 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, in collaboration with Common Criteria Project Sponsoring Organisations. The identical text of ISO/IEC 15408-2 is published by the Common Criteria Project Sponsoring Organisations as *Common Criteria for Information Technology Security Evaluation*. Additional information on the Common Criteria Project and contact information on its Sponsoring Organisations is provided in Annex A of ISO/IEC 15408-1.

ISO/IEC 15408 consists of the following parts, under the general title *Information technology — Security techniques — Evaluation criteria for IT security*:

- *Part 1: Introduction and general model*
- *Part 2: Security functional requirements*
- *Part 3: Security assurance requirements*

Annexes A to M of this part of ISO/IEC 15408 are for information only.

***This LEGAL NOTICE has been placed in all Parts of ISO/IEC 15408 by request:***

*The seven governmental organisations (collectively called “the Common Criteria Project Sponsoring Organisations”) identified in ISO/IEC 15408-1 Annex A, as the joint holders of the copyright in the Common Criteria for Information Technology Security Evaluation, Parts 1 through 3 (called the “CC”), hereby grant non-exclusive license to ISO/IEC to use the CC in the development of the ISO/IEC 15408 international standard. However, the Common Criteria Project Sponsoring Organisations retain the right to use, copy, distribute, or modify the CC as they see fit.*

[IECNORM.COM](http://IECNORM.COM) : Click to view the full PDF of ISO/IEC 15408-2:1999

# Information technology — Security techniques — Evaluation criteria for IT security —

## Part 2: Security functional requirements

### 1 Scope

Security functional components, as defined in this part of ISO/IEC 15408, are the basis for the TOE IT security functional requirements expressed in a Protection Profile (PP) or a Security Target (ST). These requirements describe the desired security behaviour expected of a Target of Evaluation (TOE) and are intended to meet the security objectives as stated in a PP or an ST. These requirements describe security properties that users can detect by direct interaction with the TOE (i.e. inputs, outputs) or by the TOE's response to stimulus.

Security functional components express security requirements intended to counter threats in the assumed operating environment of the TOE and/or cover any identified organisational security policies and assumptions.

The audience for this part of ISO/IEC 15408 includes consumers, developers, and evaluators of secure IT systems and products. ISO/IEC 15408-1 clause 3 provides additional information on the target audience of ISO/IEC 15408, and on the use of the standard by the groups that comprise the target audience. These groups may use this part of ISO/IEC 15408 as follows:

- Consumers who use ISO/IEC 15408-2 when selecting components to express functional requirements to satisfy the security objectives expressed in a PP or ST. ISO/IEC 15408-1 subclause 4.3 provides more detailed information on the relationship between security objectives and security requirements.
- Developers, who respond to actual or perceived consumer security requirements in constructing a TOE, may find a standardised method to understand those requirements in this part of ISO/IEC 15408. They can also use the contents of this part of ISO/IEC 15408 as a basis for further defining the TOE security functions and mechanisms that comply with those requirements.

Evaluators, who use the functional requirements defined in this part of ISO/IEC 15408 in verifying that the TOE functional requirements expressed in the PP or ST satisfy the IT security objectives and that all dependencies are accounted for and shown to be satisfied. Evaluators also should use this part of ISO/IEC 15408 to assist in determining whether a given TOE satisfies stated requirements.

#### 1.1 Extending and maintaining functional requirements

ISO/IEC 15408 and the associated security functional requirements described herein are not meant to be a definitive answer to all the problems of IT security. Rather, the standard offers a set of well understood security functional requirements that can be used to create trusted products or systems

reflecting the needs of the market. These security functional requirements are presented as the current state of the art in requirements specification and evaluation.

This part of ISO/IEC 15408 does not presume to include all possible security functional requirements but rather contains those that are known and agreed to be of value by the ISO/IEC 15408-2 authors at the time of release.

Since the understanding and needs of consumers may change, the functional requirements in this part of ISO/IEC 15408 will need to be maintained. It is envisioned that some PP/ST authors may have security needs not (yet) covered by the functional requirement components in ISO/IEC 15408-2. In those cases the PP/ST author may choose to consider using functional requirements not taken from the standard (referred to as extensibility), as explained in Annexes B and C of ISO/IEC 15408-1.

## 1.2 Organisation of ISO/IEC 15408-2

Clause 1 is the introductory material for ISO/IEC 15408-2.

Clause 2 introduces the catalogue of ISO/IEC 15408-2 functional components while clauses 3 through 13 describe the functional classes.

Annex A provides additional information of interest to potential users of the functional components including a complete cross reference table of the functional component dependencies.

Annexes B through M provide the application notes for the functional classes. They are a repository for informative supporting material for the users of this part of ISO/IEC 15408, which may help them to apply relevant operations and select appropriate audit or documentation information.

Those who author PPs or STs should refer to Clause 2 of ISO/IEC 15408-1 for relevant structures, rules, and guidance:

- ISO/IEC 15408-1, clause 2 defines the terms used in ISO/IEC 15408.
- ISO/IEC 15408-1, Annex B defines the structure for PPs.
- ISO/IEC 15408-1, Annex C defines the structure for STs.

## 1.3 Functional requirements paradigm

This subclause describes the paradigm used in the security functional requirements of this part of ISO/IEC 15408. Figures 1.1 and 1.2 depict some of the key concepts of the paradigm. This subclause provides descriptive text for those figures and for other key concepts not depicted. Key concepts discussed are highlighted in bold/italics. This subclause is not intended to replace or supersede any of the terms found in the ISO/IEC 15408 glossary in ISO/IEC 15408-1, clause 2.

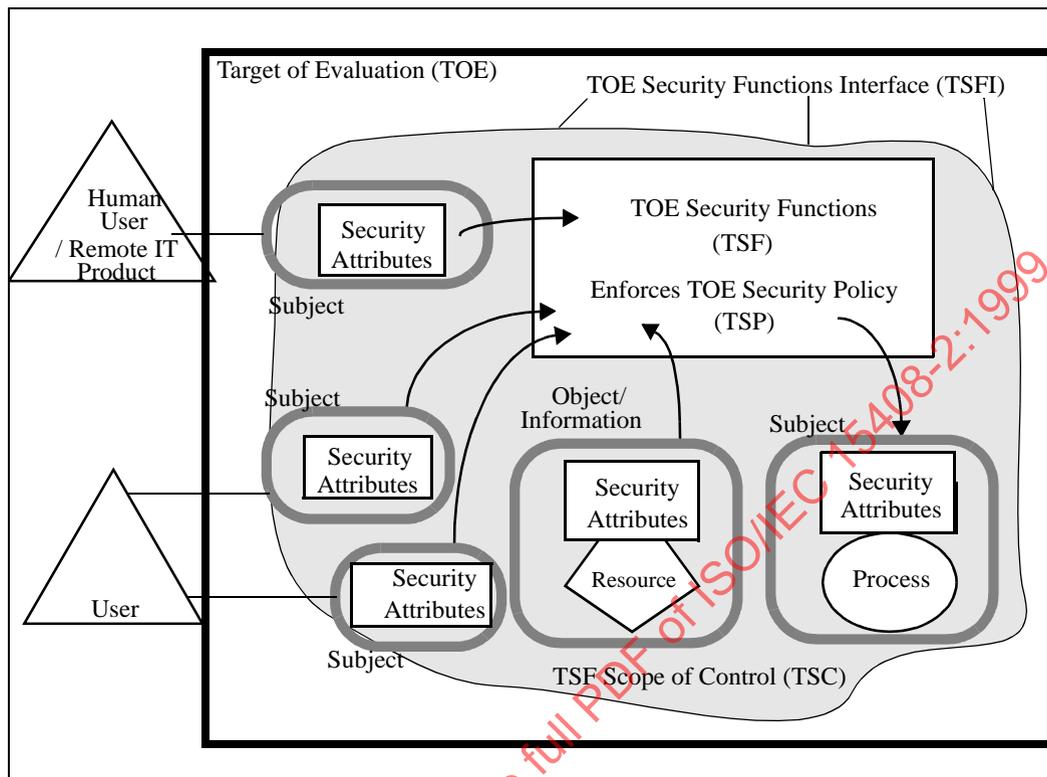


Figure 1.1 - Security functional requirements paradigm (Monolithic TOE)

This part of ISO/IEC 15408 is a catalogue of security functional requirements that can be specified for a **Target of Evaluation (TOE)**. A TOE is an IT product or system (along with user and administrator guidance documentation) containing resources such as electronic storage media (e.g. disks), peripheral devices (e.g. printers), and computing capacity (e.g. CPU time) that can be used for processing and storing information and is the subject of an evaluation.

TOE evaluation is concerned primarily with ensuring that a defined **TOE Security Policy (TSP)** is enforced over the TOE resources. The TSP defines the rules by which the TOE governs access to its resources, and thus all information and services controlled by the TOE.

The TSP is, in turn, made up of multiple **Security Function Policies (SFPs)**. Each SFP has a scope of control, that defines the subjects, objects, and operations controlled under the SFP. The SFP is implemented by a **Security Function (SF)**, whose mechanisms enforce the policy and provide necessary capabilities.

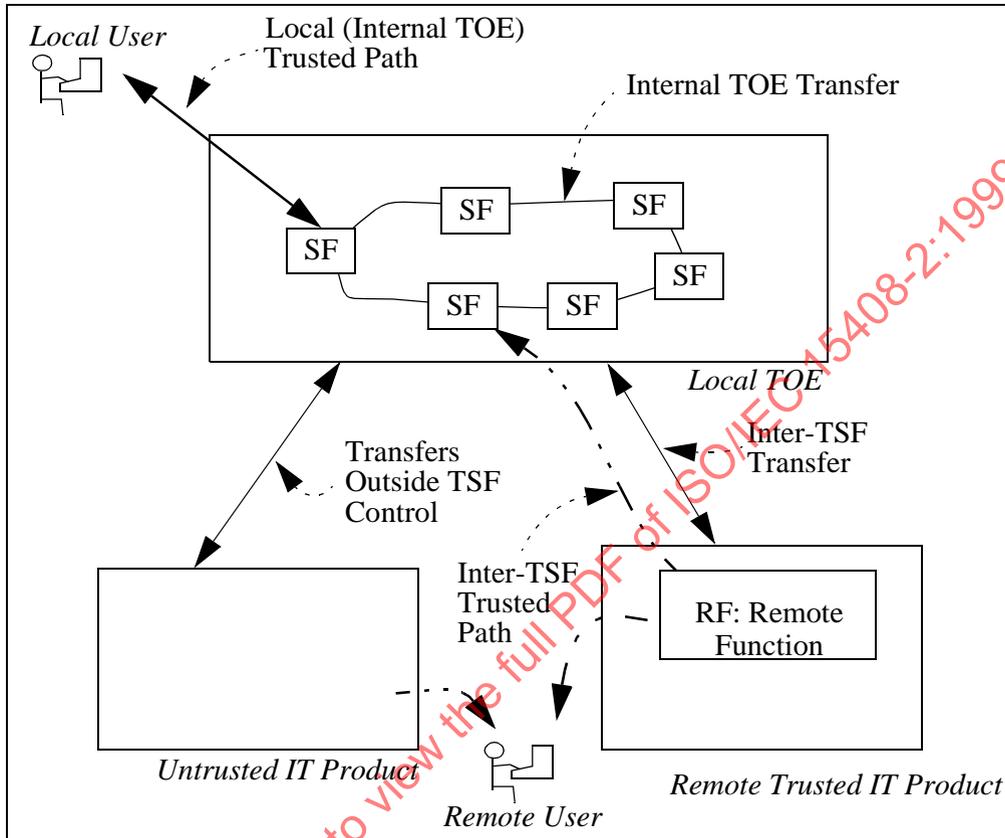


Figure 1.2 - Diagram of security functions in a distributed TOE

Those portions of a TOE that must be relied on for the correct enforcement of the TSP are collectively referred to as the **TOE Security Functions (TSF)**. The TSF consists of all hardware, software, and firmware of a TOE that is either directly or indirectly relied upon for security enforcement.

A **reference monitor** is an abstract machine that enforces the access control policies of a TOE. A **reference validation mechanism** is an implementation of the reference monitor concept that possesses the following properties: tamperproof, always invoked, and simple enough to be subjected to thorough analysis and testing. The **TSF** may consist of a reference validation mechanism and/or other security functions necessary for the operation of the TOE.

The TOE may be a monolithic product containing hardware, firmware, and software.

Alternatively a TOE may be a distributed product that consists internally of multiple separated parts. Each of these parts of the TOE provides a particular service for the TOE, and is connected to the other parts of the TOE through an **internal communication channel**. This channel can be as small as a processor bus, or may encompass a network internal to the TOE.

When the TOE consists of multiple parts, each part of the TOE may have its own part of the TSF which exchanges user and TSF data over internal communication channels with other parts of the TSF. This interaction is called *internal TOE transfer*. In this case the separate parts of the TSF abstractly form the composite TSF, which enforces the TSP.

TOE interfaces may be localised to the particular TOE, or they may allow interaction with other IT products over *external communication channels*. These external interactions with other IT products may take two forms:

- a) The security policy of the ‘remote trusted IT product’ and the TSP of the local TOEs have been administratively coordinated and evaluated. Exchanges of information in this situation are called *inter-TSF transfers*, as they are between the TSFs of distinct trusted products.
- b) The remote IT product may not be evaluated, indicated in Figure 1.2 as ‘untrusted IT product’, therefore its security policy is unknown. Exchanges of information in this situation are called *transfers outside TSF control*, as there is no TSF (or its policy characteristics are unknown) on the remote IT product.

The set of interactions that can occur with or within a TOE and are subject to the rules of the TSP is called the *TSF Scope of Control (TSC)*. The TSC encompasses a defined set of interactions based on subjects, objects, and operations within the TOE, but it need not encompass all resources of a TOE.

The set of interfaces, whether interactive (man-machine interface) or programmatic (application programming interface), through which resources are accessed that are mediated by the TSF, or information is obtained from the TSF, is referred to as the *TSF Interface (TSFI)*. The TSFI defines the boundaries of the TOE functions that provide for the enforcement of the TSP.

Users are outside of the TOE, and therefore outside of the TSC. However, in order to request that services be performed by the TOE, users interact with the TOE through the TSFI. There are two types of users of interest to the ISO/IEC 15408-2 security functional requirements: *human users* and *external IT entities*. Human users are further differentiated as *local human users*, meaning they interact directly with the TOE via TOE devices (e.g. workstations), or *remote human users*, meaning they interact indirectly with the TOE through another IT product.

A period of interaction between users and the TSF is referred to as a user *session*. Establishment of user sessions can be controlled based on a variety of considerations, for example: user authentication, time of day, method of accessing the TOE, and number of allowed concurrent sessions per user.

This part of ISO/IEC 15408 uses the term *authorised* to signify a user who possesses the rights and/or privileges necessary to perform an operation. The term *authorised user*, therefore, indicates that it is allowable for a user to perform an operation as defined by the TSP.

To express requirements that call for the separation of administrator duties, the relevant ISO/IEC 15408-2 security functional components (from family FMT\_SMR) explicitly state that administrative *roles* are required. A role is a pre-defined set of rules establishing the allowed interactions between a user and the TOE. A TOE may support the definition of any number of roles. For example, roles related to the secure operation of a TOE may include “Audit Administrator” and “User Accounts Administrator”.

TOEs contain resources that may be used for the processing and storing of information. The primary goal of the TSF is the complete and correct enforcement of the TSP over the resources and information that the TOE controls.

TOE resources can be structured and utilised in many different ways. However, ISO/IEC 15408-2 makes a specific distinction that allows for the specification of desired security properties. All entities that can be created from resources can be characterised in one of two ways. The entities may be active, meaning that they are the cause of actions that occur internal to the TOE and cause operations to be performed on information. Alternatively, the entities may be passive, meaning that they are either the container from which information originates or to which information is stored.

Active entities are referred to as *subjects*. Several types of subjects may exist within a TOE:

- a) those acting on behalf of an authorised user and which are subject to all the rules of the TSP (e.g. UNIX processes);
- b) those acting as a specific functional process that may in turn act on behalf of multiple users (e.g. functions as might be found in client/server architectures); or
- c) those acting as part of the TOE itself (e.g. trusted processes).

ISO/IEC 15408-2 addresses the enforcement of the TSP over types of subjects as those listed above.

Passive entities (i.e. information containers) are referred to in the ISO/IEC 15408-2 security functional requirements as *objects*. Objects are the targets of operations that may be performed by subjects. In the case where a subject (an active entity) is the target of an operation (e.g. interprocess communication), a subject may also be acted on as an object.

Objects can contain *information*. This concept is required to specify information flow control policies as addressed in the FDP class.

Users, subjects, information and objects possess certain *attributes* that contain information that allows the TOE to behave correctly. Some attributes, such as file names, may be intended to be informational (i.e. to increase the user-friendliness of the TOE) while others, such as access control information, may exist specifically for the enforcement of the TSP. These latter attributes are generally referred to as '*security attributes*'. The word attribute will be used as a shorthand in this part of ISO/IEC 15408 for the word 'security attribute', unless otherwise indicated. However, no matter what the intended purpose of the attribute information, it may be necessary to have controls on attributes as dictated by the TSP.

Data in a TOE is categorised as either user data or TSF data. Figure 1.3 depicts this relationship. *User Data* is information stored in TOE resources that can be operated upon by users in accordance with the TSP and upon which the TSF places no special meaning. For example, the contents of an electronic mail message is user data. *TSF Data* is information used by the TSF in making TSP decisions. TSF Data may be influenced by users if allowed by the TSP. Security attributes, authentication data and access control list entries are examples of TSF data.

There are several SFPs that apply to data protection such as *access control SFPs* and *information flow control SFPs*. The mechanisms that implement access control SFPs base their policy decisions on attributes of the subjects, objects and operations within the scope of control. These attributes are used in the set of rules that govern operations that subjects may perform on objects.

The mechanisms that implement information flow control SFPs base their policy decisions on the attributes of the subjects and information within the scope of control and the set of rules that govern the operations by subjects on information. The attributes of the information, which may be associated with the attributes of the container (or may not, as in the case of a multi-level database) stay with the information as it moves.

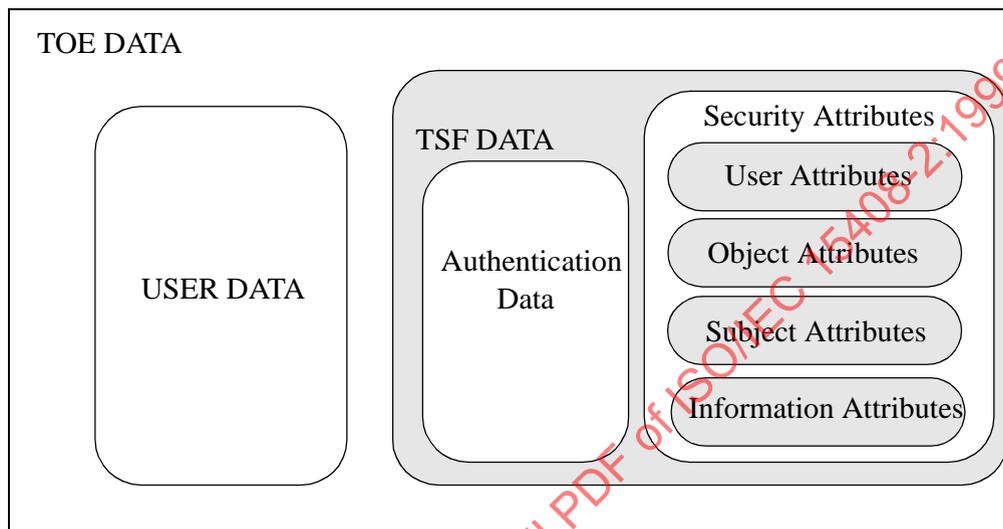


Figure 1.3 - Relationship between user data and TSF data

Two specific types of TSF data addressed by ISO/IEC 15408-2 can be, but are not necessarily, the same. These are *authentication data* and *secrets*.

Authentication data is used to verify the claimed identity of a user requesting services from a TOE. The most common form of authentication data is the password, which depends on being kept secret in order to be an effective security mechanism. However, not all forms of authentication data need to be kept secret. Biometric authentication devices (e.g. fingerprint readers, retinal scanners) do not rely on the fact that the data is kept secret, but rather that the data is something that only one user possesses and that cannot be forged.

The term *secrets*, as used in ISO/IEC 15408-2 functional requirements, while applicable to authentication data, is intended to also be applicable to other types of data that must be kept secret in order to enforce a specific SFP. For example, a trusted channel mechanism that relies on cryptography to preserve the confidentiality of information being transmitted via the channel can only be as strong as the method used to keep the cryptographic keys secret from unauthorised disclosure.

Therefore, some, but not all, authentication data needs to be kept secret and some, but not all, secrets are used as authentication data. Figure 1.4 shows this relationship between secrets and authentication data. In the Figure the types of data typically encountered in the authentication data and the secrets sections are indicated.

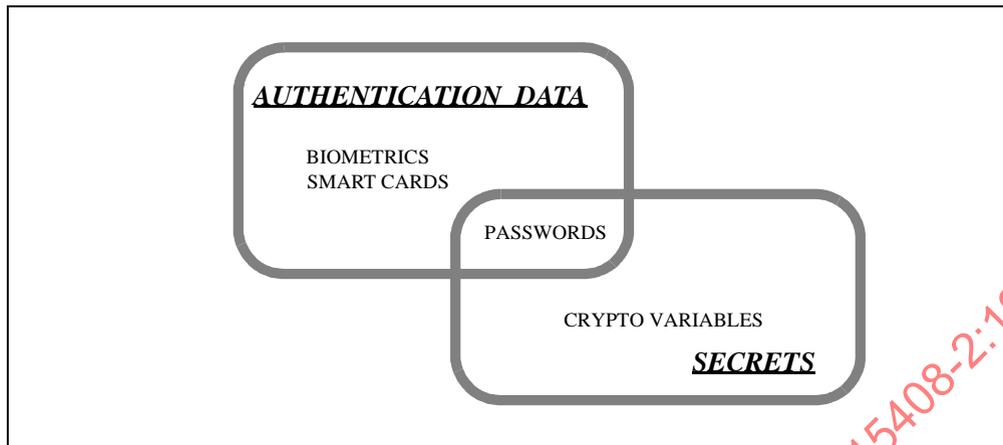


Figure 1.4 - Relationship between “authentication data” and “secrets”

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## 2 Security functional components

### 2.1 Overview

This clause defines the content and presentation of the functional requirements of ISO/IEC 15408, and provides guidance on the organisation of the requirements for new components to be included in an ST. The functional requirements are expressed in classes, families, and components.

#### 2.1.1 Class structure

Figure 2.1 illustrates the functional class structure in diagrammatic form. Each functional class includes a class name, class introduction, and one or more functional families.

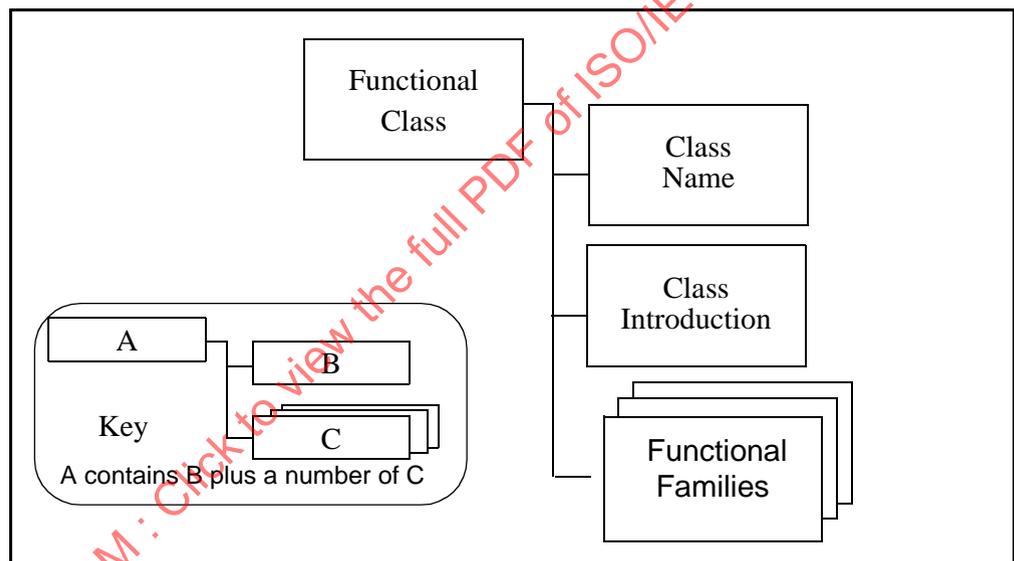


Figure 2.1 - Functional class structure

##### 2.1.1.1 Class name

The class name subclause provides information necessary to identify and categorise a functional class. Every functional class has a unique name. The categorical information consists of a short name of three characters. The short name of the class is used in the specification of the short names of the families of that class.

##### 2.1.1.2 Class introduction

The class introduction expresses the common intent or approach of those families to satisfy security objectives. The definition of functional classes does not reflect any formal taxonomy in the specification of the requirements.

The class introduction provides a figure describing the families in this class and the hierarchy of the components in each family, as explained in 2.2.

### 2.1.2 Family structure

Figure 2.2 illustrates the functional family structure in diagrammatic form.

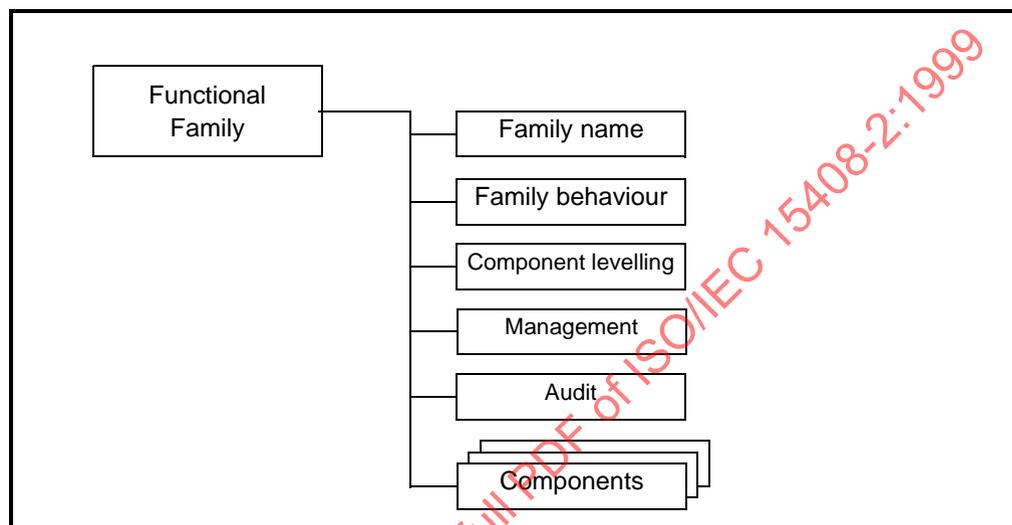


Figure 2.2 - Functional family structure

#### 2.1.2.1 Family name

The family name subclause provides categorical and descriptive information necessary to identify and categorise a functional family. Every functional family has a unique name. The categorical information consists of a short name of seven characters, with the first three identical to the short name of the class followed by an underscore and the short name of the family as follows XXX\_YYY. The unique short form of the family name provides the principal reference name for the components.

#### 2.1.2.2 Family behaviour

The family behaviour is the narrative description of the functional family stating its security objective and a general description of the functional requirements. These are described in greater detail below:

- a) The *security objectives* of the family address a security problem that may be solved with the help of a TOE that incorporates a component of this family;
- b) The description of the *functional requirements* summarises all the requirements that are included in the component(s). The description is aimed at authors of PPs, STs and functional packages who wish to assess whether the family is relevant to their specific requirements.

### 2.1.2.3 Component levelling

Functional families contain one or more components, any one of which can be selected for inclusion in PPs, STs and functional packages. The goal of this section is to provide information to users in selecting an appropriate functional component once the family has been identified as being a necessary or useful part of their security requirements.

This section of the functional family description describes the components available, and their rationale. The exact details of the components are contained within each component.

The relationships between components within a functional family may or may not be hierarchical. A component is hierarchical to another if it offers more security.

As explained in 2.2 the descriptions of the families provide a graphical overview of the hierarchy of the components in a family.

### 2.1.2.4 Management

The *management* requirements contain information for the PP/ST authors to consider as management activities for a given component. The management requirements are detailed in components of the management class (FMT).

A PP/ST author may select the indicated management requirements or may include other management requirements not listed. As such the information should be considered informative.

### 2.1.2.5 Audit


The *audit* requirements contain auditable events for the PP/ST authors to select, if requirements from the class FAU, Security audit, are included in the PP/ST. These requirements include security relevant events in terms of the various levels of detail supported by the components of the FAU\_GEN Security audit data generation family. For example, an audit note might include actions that are in terms of: Minimal - successful use of the security mechanism; Basic - any use of the security mechanism as well as relevant information regarding the security attributes involved; Detailed - any configuration changes made to the mechanism, including the actual configuration values before and after the change.

It should be observed that the categorisation of auditable events is hierarchical. For example, when Basic Audit Generation is desired, all auditable events identified as being both Minimal and Basic should be included in the PP/ST through the use of the appropriate assignment operation, except when the higher level event simply provides more detail than the lower level event. When Detailed Audit Generation is desired, all identified auditable events (Minimal, Basic and Detailed) should be included in the PP/ST.

In the class FAU the rules governing the audit are explained in more detail.

## 2.1.3 Component structure

Figure 2.3 illustrates the functional component structure.

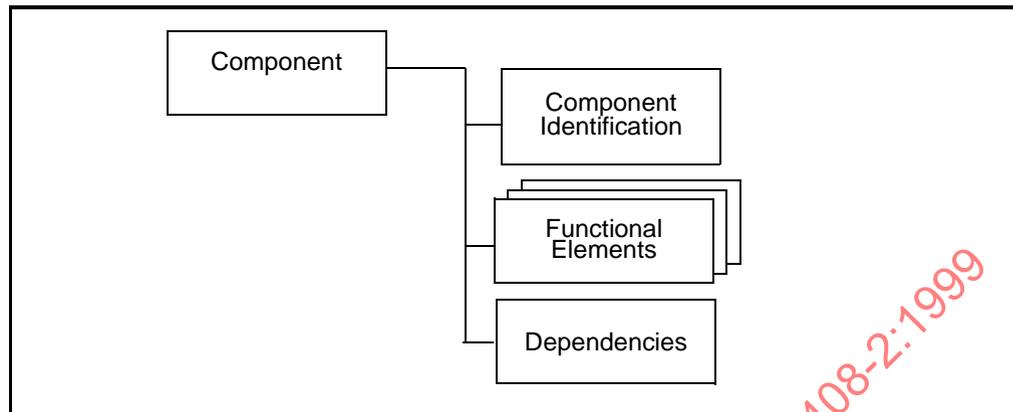

**Figure 2.3 - Functional component structure**

### 2.1.3.1 Component identification

The component identification subclause provides descriptive information necessary to identify, categorise, register and cross-reference a component. The following is provided as part of every functional component:

*A unique name.* The name reflects the purpose of the component.

*A short name.* A unique short form of the functional component name. This short name serves as the principal reference name for the categorisation, registration and cross-referencing of the component. This short name reflects the class and family to which the component belongs and the component number within the family.

*A hierarchical-to list.* A list of other components that this component is hierarchical to and for which this component can be used to satisfy dependencies to the listed components.

### 2.1.3.2 Functional elements

A set of elements is provided for each component. Each element is individually defined and is self-contained.

A functional element is a security functional requirement that if further divided would not yield a meaningful evaluation result. It is the smallest security functional requirement identified and recognised in ISO/IEC 15408.

When building packages, PPs and/or STs, it is not permitted to select only one or more elements from a component. The complete set of elements of a component must be selected for inclusion in a PP, ST or package.

A unique short form of the functional element name is provided. For example the requirement name FDP\_IFF.4.2 reads as follows: F - functional requirement, DP - class “User data protection”, \_IFF - family “Information flow control functions”, .4 - 4th component named “Partial elimination of illicit information flows”, .2 - 2nd element of the component.

### 2.1.3.3 Dependencies

Dependencies among functional components arise when a component is not self sufficient and relies upon the functionality of, or interaction with, another component for its own proper functioning.

Each functional component provides a complete list of dependencies to other functional and assurance components. Some components may list “No dependencies”. The components depended upon may in turn have dependencies on other components. The list provided in the components will be the direct dependencies. That is only references to the functional requirements that are required for this requirement to perform its job properly. The indirect dependencies, that is the dependencies that result from the depended upon components can be found in Annex A of this part of ISO/IEC 15408. It is noted that in some cases the dependency is optional in that a number of functional requirements are provided, where each one of them would be sufficient to satisfy the dependency (see for example FDP\_UIT.1).

The dependency list identifies the minimum functional or assurance components needed to satisfy the security requirements associated with an identified component. Components that are hierarchical to the identified component may also be used to satisfy the dependency.

The dependencies indicated in ISO/IEC 15408-2 are normative. They must be satisfied within a PP/ST. In specific situations the indicated dependencies might not be applicable. The PP/ST author, by providing the rationale why it is not applicable, may leave the depended upon component out of the package, PP or ST.

### 2.1.4 Permitted functional component operations

The functional components used in the definition of the requirements in a PP, an ST or a functional package may be exactly as specified in clauses 3 to 13 of this part of ISO/IEC 15408, or they may be tailored to meet a specific security objective. However, selecting and tailoring these functional components is complicated by the fact that identified component dependencies must be considered. Thus, this tailoring is restricted to an approved set of operations.

A list of permitted operations is included with each functional component. Not all operations are permitted on all functional components.

The permitted operations are selected from the following set:

- iteration: allows a component to be used more than once with varying operations,
- assignment: allows the specification of an identified parameter,
- selection: allows the specification of one or more elements from a list,
- refinement: allows the addition of details.

#### 2.1.4.1 Iteration

Where necessary to cover different aspects of the same requirement (e.g. identification of more than one type of user), repetitive use of the same component from this part of ISO/IEC 15408 to cover each aspect is permitted.

#### 2.1.4.2 Assignment

Some functional component elements contain parameters or variables that enable the PP/ST author to specify a policy or a set of values for incorporation into the PP or ST to meet a specific security objective. These elements clearly identify each parameter and constraint on values that may be assigned to that parameter.

Any aspect of an element whose acceptable values can be unambiguously described or enumerated can be represented by a parameter. The parameter may be an attribute or rule that narrows the requirement to a specific value or range of values. For instance, based on a specified security objective, the functional component element may state that a given operation should be performed a number of times. In this case, the assignment would provide the number, or range of numbers, to be used in the parameter.

#### 2.1.4.3 Selection

This is the operation of picking one or more items from a list in order to narrow the scope of a component element.

#### 2.1.4.4 Refinement

For all functional component elements the PP/ST author is permitted to limit the set of acceptable implementations by specifying additional detail in order to meet a security objective. Refinement of an element consists of adding these technical details.

Within a ST, the meanings of the terms subject and object might need to be explained for the TOE to be meaningful, and are therefore subject to refinement.

Like the other operations, refinement does not levy any completely new requirements. It applies an elaboration, interpretation, or a special meaning to a requirement, rule, constant or condition based on security objectives. Refinement shall only further restrict the set of possible acceptable functions or mechanisms to implement the requirements, but never increase it. Refinement does not allow new requirements to be created, and therefore does not increase the list of dependencies associated with a component. The PP/ST author must be careful that the dependency needs of other requirements that depend on this requirement, are satisfied.


## 2.2 Component catalogue

The grouping of the components in this part of ISO/IEC 15408 does not reflect any formal taxonomy.

This part of ISO/IEC 15408 contains classes of families and components, which are rough groupings on the basis of related function or purpose, presented in alphabetic order. At the start of each class is an informative diagram that indicates the taxonomy of each class, indicating the families in each class and the components in each family. The diagram is a useful indicator of the hierarchical relationship that may exist between components.

In the description of the functional components, a section identifies the dependencies between the component and any other components.

In each class a figure describing the family hierarchy similar to Figure 2.4, is provided. In Figure 2.4. the first family, Family 1, contains three hierarchical components, where component 2 and component 3 can both be used to satisfy dependencies on component 1. Component 3 is hierarchical to component 2 and can also be used to satisfy dependencies on component 2.

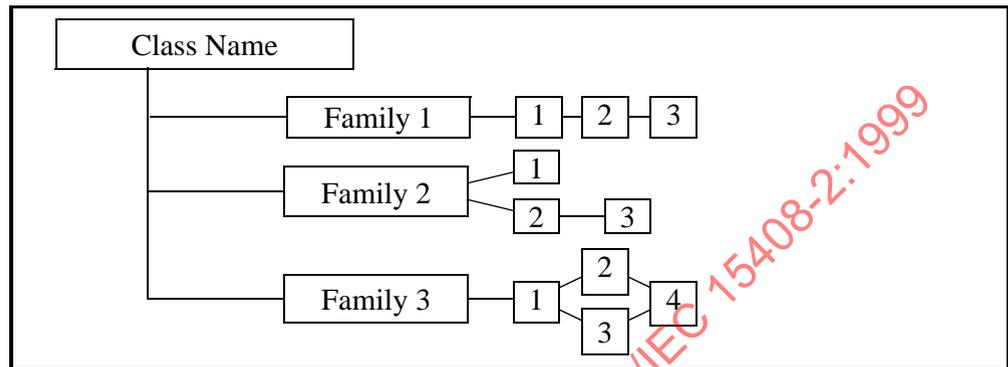

**Figure 2.4 - Sample class decomposition diagram**

In Family 2 there are three components not all of which are hierarchical. Components 1 and 2 are hierarchical to no other components. Component 3 is hierarchical to component 2, and can be used to satisfy dependencies on component 2, but not to satisfy dependencies on component 1.

In Family 3, components 2, 3, and 4 are hierarchical to component 1. Components 2 and 3 are both hierarchical to component 1, but non-comparable. Component 4 is hierarchical to both component 2 and component 3.

These diagrams are meant to complement the text of the families and make identification of the relationships easier. They do not replace the “Hierarchical to:” note in each component that is the mandatory claim of hierarchy for each component.

### 2.2.1 Component changes highlighting

The relationship between components within a family is highlighted using a **bolding** convention. This bolding convention calls for the bolding of all new requirements. For hierarchical components, requirements and/or dependencies are bolded when they are enhanced or modified beyond the requirements of the previous component. In addition, any new or enhanced permitted operations beyond the previous component are also highlighted using **bold** type.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

### 3 Class FAU: Security audit

Security auditing involves recognising, recording, storing, and analysing information related to security relevant activities (i.e. activities controlled by the TSP). The resulting audit records can be examined to determine which security relevant activities took place and whom (which user) is responsible for them.

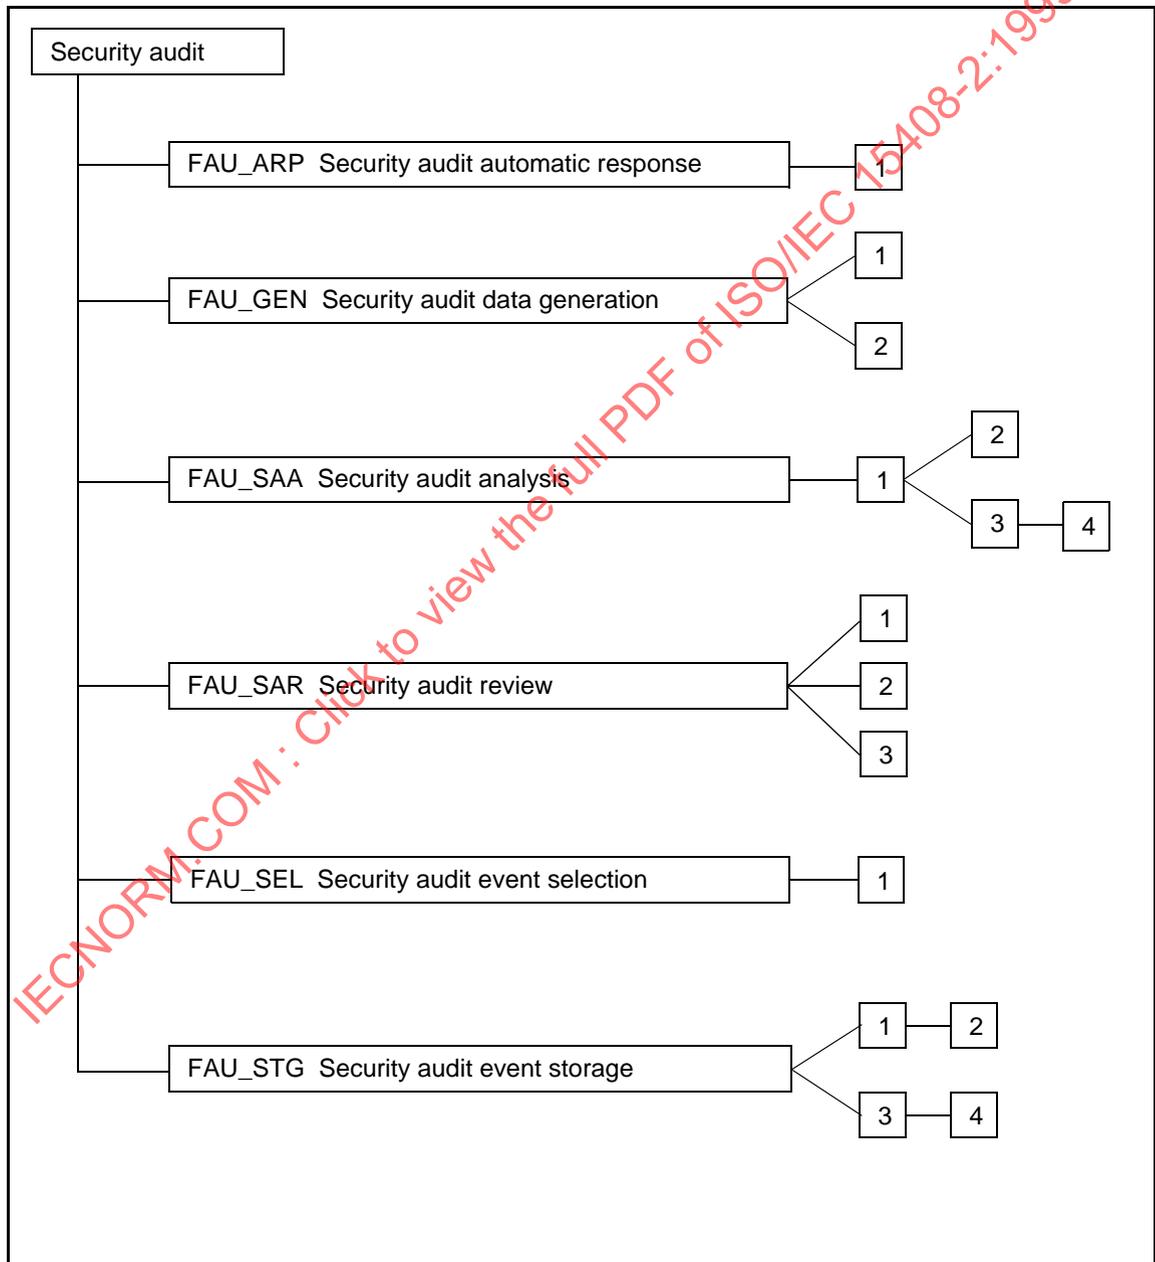



Figure 3.1 - Security audit class decomposition

### 3.1 Security audit automatic response (FAU\_ARP)

Family behaviour

This family defines the response to be taken in case of detected events indicative of a potential security violation.

Component levelling



At FAU\_ARP.1 Security alarms, the TSF shall take actions in case a potential security violation is detected.

Management: FAU\_ARP.1

The following actions could be considered for the management functions in FMT:

- a) the management (addition, removal, or modification) of actions.

Audit: FAU\_ARP.1

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: Actions taken due to imminent security violations.

#### FAU\_ARP.1 Security alarms

Hierarchical to: No other components.

**FAU\_ARP.1.1 The TSF shall take [assignment: *list of the least disruptive actions*] upon detection of a potential security violation.**


Dependencies: FAU\_SAA.1 Potential violation analysis

## 3.2 Security audit data generation (FAU\_GEN)

### Family behaviour

This family defines requirements for recording the occurrence of security relevant events that take place under TSF control. This family identifies the level of auditing, enumerates the types of events that shall be auditable by the TSF, and identifies the minimum set of audit-related information that should be provided within various audit record types.

### Component levelling

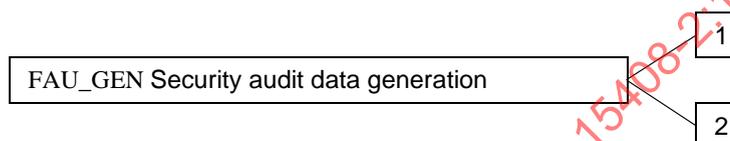

FAU\_GEN.1 Audit data generation defines the level of auditable events, and specifies the list of data that shall be recorded in each record.

At FAU\_GEN.2 User identity association, the TSF shall associate auditable events to individual user identities.

Management: FAU\_GEN.1, FAU\_GEN.2

There are no management activities foreseen.

Audit: FAU\_GEN.1, FAU\_GEN.2

There are no actions identified that should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST.

### FAU\_GEN.1 Audit data generation

Hierarchical to: No other components.

**FAU\_GEN.1.1 The TSF shall be able to generate an audit record of the following auditable events:**

- a) **Start-up and shutdown of the audit functions;**
- b) **All auditable events for the [selection: *minimum, basic, detailed, not specified*] level of audit; and**
- c) **[assignment: *other specifically defined auditable events*].**

**FAU\_GEN.1.2 The TSF shall record within each audit record at least the following information:**

- a) **Date and time of the event, type of event, subject identity, and the outcome (success or failure) of the event; and**
- b) **For each audit event type, based on the auditable event definitions of the functional components included in the PP/ST, [assignment: *other audit relevant information*]**

Dependencies: **FPT\_STM.1 Reliable time stamps**

#### **FAU\_GEN.2 User identity association**

Hierarchical to: No other components.

**FAU\_GEN.2.1 The TSF shall be able to associate each auditable event with the identity of the user that caused the event.**

Dependencies: **FAU\_GEN.1 Audit data generation**  
**FIA\_UID.1 Timing of identification**

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999


### 3.3 Security audit analysis (FAU\_SAA)

#### Family behaviour

This family defines requirements for automated means that analyse system activity and audit data looking for possible or real security violations. This analysis may work in support of intrusion detection, or automatic response to an imminent security violation.

The actions to be taken based on the detection can be specified using the FAU\_ARP family as desired.

#### Component levelling

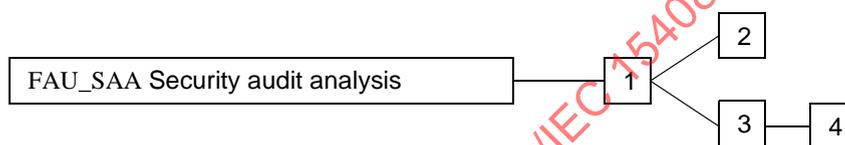

In FAU\_SAA.1 Potential violation analysis, basic threshold detection on the basis of a fixed rule set is required.

In FAU\_SAA.2 Profile based anomaly detection, the TSF maintains individual *profiles* of system usage, where a profile represents the historical patterns of usage performed by members of the *profile target group*. A profile target group refers to a group of one or more individuals (e.g. a single user, users who share a group ID or group account, users who operate under an assigned role, users of an entire system or network node) who interact with the TSF. Each member of a profile target group is assigned an individual *suspicion rating* that represents how well that member's current activity corresponds to the established patterns of usage represented in the profile. This analysis can be performed at runtime or during a post-collection batch-mode analysis.

In FAU\_SAA.3 Simple attack heuristics, the TSF shall be able to detect the occurrence of signature events that represent a significant threat to TSP enforcement. This search for signature events may occur in real-time or during a post-collection batch-mode analysis.

In FAU\_SAA.4 Complex attack heuristics, the TSF shall be able to represent and detect multi-step intrusion scenarios. The TSF is able to compare system events (possibly performed by multiple individuals) against event sequences known to represent entire intrusion scenarios. The TSF shall be able to indicate when a signature event or event sequence is found that indicates a potential violation of the TSP.

#### Management: FAU\_SAA.1

The following actions could be considered for the management functions in FMT:

- a) maintenance of the rules by (adding, modifying, deletion) of rules from the set of rules.

#### Management: FAU\_SAA.2

The following actions could be considered for the management functions in FMT:

- a) maintenance (deletion, modification, addition) of the group of users in the profile target group.

Management: FAU\_SAA.3

The following actions could be considered for the management functions in FMT:

- a) maintenance (deletion, modification, addition) of the subset of system events.

Management: FAU\_SAA.4

The following actions could be considered for the management functions in FMT:

- a) maintenance (deletion, modification, addition) of the subset of system events;
- b) maintenance (deletion, modification, addition) of the set of sequence of system events.

Audit: FAU\_SAA.1, FAU\_SAA.2, FAU\_SAA.3, FAU\_SAA.4

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: Enabling and disabling of any of the analysis mechanisms;
- b) Minimal: Automated responses performed by the tool.

### **FAU\_SAA.1 Potential violation analysis**

Hierarchical to: No other components.

**FAU\_SAA.1.1 The TSF shall be able to apply a set of rules in monitoring the audited events and based upon these rules indicate a potential violation of the TSP.**

**FAU\_SAA.1.2 The TSF shall enforce the following rules for monitoring audited events:**

- a) **Accumulation or combination of [assignment: *subset of defined auditable events*] known to indicate a potential security violation;**
- b) **[assignment: *any other rules*].**

Dependencies: **FAU\_GEN.1 Audit data generation**

### **FAU\_SAA.2 Profile based anomaly detection**

Hierarchical to: FAU\_SAA.1

**FAU\_SAA.2.1 The TSF shall be able to maintain profiles of system usage, where an individual profile represents the historical patterns of usage performed by the member(s) of [assignment: *the profile target group*].**

FAU\_SAA.2.2 The TSF shall be able to maintain a suspicion rating associated with each user whose activity is recorded in a profile, where the suspicion rating represents the degree to which the user's current activity is found inconsistent with the established patterns of usage represented in the profile.

FAU\_SAA.2.3 The TSF shall be able to indicate an imminent violation of the TSP when a user's suspicion rating exceeds the following threshold conditions [assignment: *conditions under which anomalous activity is reported by the TSF*].

Dependencies: FIA\_UID.1 Timing of identification

### FAU\_SAA.3 Simple attack heuristics

Hierarchical to: FAU\_SAA.1

FAU\_SAA.3.1 The TSF shall be able to maintain an internal representation of the following signature events [assignment: *a subset of system events*] that may indicate a violation of the TSP.

FAU\_SAA.3.2 The TSF shall be able to compare the signature events against the record of system activity discernible from an examination of [assignment: *the information to be used to determine system activity*].

FAU\_SAA.3.3 The TSF shall be able to indicate an imminent violation of the TSP when a system event is found to match a signature event that indicates a potential violation of the TSP.

Dependencies: No dependencies.

### FAU\_SAA.4 Complex attack heuristics

Hierarchical to: FAU\_SAA.3

FAU\_SAA.4.1 The TSF shall be able to maintain an internal representation of the following event sequences of known intrusion scenarios [assignment: *list of sequences of system events whose occurrence are representative of known penetration scenarios*] and the following signature events [assignment: *a subset of system events*] that may indicate a potential violation of the TSP.

FAU\_SAA.4.2 The TSF shall be able to compare the signature events and event sequences against the record of system activity discernible from an examination of [assignment: *the information to be used to determine system activity*].

FAU\_SAA.4.3 The TSF shall be able to indicate an imminent violation of the TSP when system activity is found to match a signature event or event sequence that indicates a potential violation of the TSP.


Dependencies: No dependencies.

### 3.4 Security audit review (FAU\_SAR)

#### Family behaviour

This family defines the requirements for audit tools that should be available to authorised users to assist in the review of audit data.

#### Component levelling

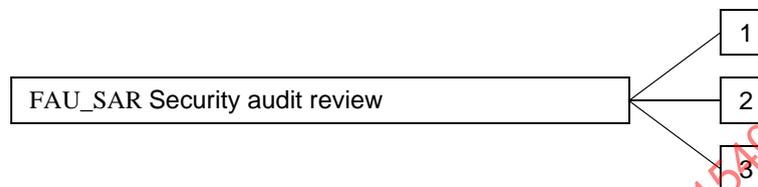

FAU\_SAR.1 Audit review provides the capability to read information from the audit records.

FAU\_SAR.2 Restricted audit review requires that there are no other users except those that have been identified in FAU\_SAR.1 that can read the information.

FAU\_SAR.3 Selectable audit review requires audit review tools to select the audit data to be reviewed based on criteria.

#### Management: FAU\_SAR.1

The following actions could be considered for the management functions in FMT:

- a) maintenance (deletion, modification, addition) of the group of users with read access right to the audit records.

#### Management: FAU\_SAR.2, FAU\_SAR.3

There are no management activities foreseen.

#### Audit: FAU\_SAR.1

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Basic: Reading of information from the audit records.

#### Audit: FAU\_SAR.2

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Basic: Unsuccessful attempts to read information from the audit records.

Audit: FAU\_SAR.3

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Detailed: the parameters used for the viewing.

### **FAU\_SAR.1 Audit review**

This component will provide authorised users the capability to obtain and interpret the information. In case of human users this information needs to be in a human understandable presentation. In case of external IT entities the information needs to be unambiguously represented in an electronic fashion.

Hierarchical to: No other components.

**FAU\_SAR.1.1 The TSF shall provide [assignment: *authorised users*] with the capability to read [assignment: *list of audit information*] from the audit records.**

**FAU\_SAR.1.2 The TSF shall provide the audit records in a manner suitable for the user to interpret the information.**

Dependencies: FAU\_GEN.1 Audit data generation

### **FAU\_SAR.2 Restricted audit review**

Hierarchical to: No other components.

**FAU\_SAR.2.1 The TSF shall prohibit all users read access to the audit records, except those users that have been granted explicit read-access.**

Dependencies: FAU\_SAR.1 Audit review

### **FAU\_SAR.3 Selectable audit review**

Hierarchical to: No other components.


**FAU\_SAR.3.1 The TSF shall provide the ability to perform [selection: *searches, sorting, ordering*] of audit data based on [assignment: *criteria with logical relations*].**

Dependencies: FAU\_SAR.1 Audit review

### 3.5 Security audit event selection (FAU\_SEL)

#### Family behaviour

This family defines requirements to select the events to be audited during TOE operation. It defines requirements to include or exclude events from the set of auditable events.



FAU\_SEL.1 Selective audit, requires the ability to include or exclude events from the set of audited events based upon attributes to be specified by the PP/ST author.

Management: FAU\_SEL.1

The following actions could be considered for the management functions in FMT:

- a) maintenance of the rights to view/modify the audit events.

Audit: FAU\_SEL.1

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: All modifications to the audit configuration that occur while the audit collection functions are operating.

#### FAU\_SEL.1 Selective audit

Hierarchical to: No other components.

FAU\_SEL.1.1 **The TSF shall be able to include or exclude auditable events from the set of audited events based on the following attributes:**

- a) [selection: *object identity, user identity, subject identity, host identity, event type*]
- b) [assignment: *list of additional attributes that audit selectivity is based upon*].

Dependencies: FAU\_GEN.1 Audit data generation


FMT\_MTD.1 Management of TSF data

### 3.6 Security audit event storage (FAU\_STG)

#### Family behaviour

This family defines the requirements for the TSF to be able to create and maintain a secure audit trail.

#### Component levelling

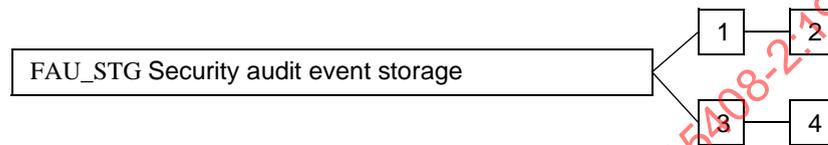

At FAU\_STG.1 Protected audit trail storage, requirements are placed on the audit trail. It will be protected from unauthorised deletion and/or modification.

FAU\_STG.2 Guarantees of audit data availability specifies the guarantees that the TSF maintains over the audit data given the occurrence of an undesired condition.

FAU\_STG.3 Action in case of possible audit data loss specifies actions to be taken if a threshold on the audit trail is exceeded.

FAU\_STG.4 Prevention of audit data loss specifies actions in case the audit trail is full.

Management: FAU\_STG.1

There are no management activities foreseen.

Management: FAU\_STG.2

The following actions could be considered for the management functions in FMT:

- a) maintenance of the parameters that control the audit storage capability.

Management: FAU\_STG.3

The following actions could be considered for the management functions in FMT:

- a) maintenance of the threshold;
- b) maintenance (deletion, modification, addition) of actions to be taken in case of imminent audit storage failure.

Management: FAU\_STG.4

The following actions could be considered for the management functions in FMT:

- a) maintenance (deletion, modification, addition) of actions to be taken in case of audit storage failure.

Audit: FAU\_STG.1, FAU\_STG.2

There are no actions identified that should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST.

Audit: FAU\_STG.3

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Basic: Actions taken due to exceeding of a threshold.

Audit: FAU\_STG.4

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Basic: Actions taken due to the audit storage failure.

### **FAU\_STG.1 Protected audit trail storage**

Hierarchical to: No other components.

**FAU\_STG.1.1 The TSF shall protect the stored audit records from unauthorised deletion.**

**FAU\_STG.1.2 The TSF shall be able to [selection: *prevent*, *detect*] modifications to the audit records.**

Dependencies: FAU\_GEN.1 Audit data generation

### **FAU\_STG.2 Guarantees of audit data availability**

Hierarchical to: FAU\_STG.1

**FAU\_STG.2.1 The TSF shall protect the stored audit records from unauthorised deletion.**

**FAU\_STG.2.2 The TSF shall be able to [selection: *prevent*, *detect*] modifications to the audit records.**

**FAU\_STG.2.3 The TSF shall ensure that [assignment: *metric for saving audit records*] audit records will be maintained when the following conditions occur: [selection: *audit storage exhaustion*, *failure*, *attack*].**

Dependencies: FAU\_GEN.1 Audit data generation

**FAU\_STG.3 Action in case of possible audit data loss**

Hierarchical to: No other components.

**FAU\_STG.3.1** The TSF shall take [assignment: *actions to be taken in case of possible audit storage failure*] if the audit trail exceeds [assignment: *pre-defined limit*].

Dependencies: FAU\_STG.1 Protected audit trail storage

**FAU\_STG.4 Prevention of audit data loss**

Hierarchical to: FAU\_STG.3

**FAU\_STG.4.1** The TSF shall [selection: *'ignore auditable events', 'prevent auditable events, except those taken by the authorised user with special rights', 'overwrite the oldest stored audit records'*] and [assignment: *other actions to be taken in case of audit storage failure*] if the audit trail is full.

Dependencies: FAU\_STG.1 Protected audit trail storage

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## 4 Class FCO: Communication

This class provides two families specifically concerned with assuring the identity of a party participating in a data exchange. These families are related to assuring the identity of the originator of transmitted information (proof of origin) and assuring the identity of the recipient of transmitted information (proof of receipt). These families ensure that an originator cannot deny having sent the message, nor can the recipient deny having received it.

Figure 4.1 shows the decomposition of this class into its constituent components.

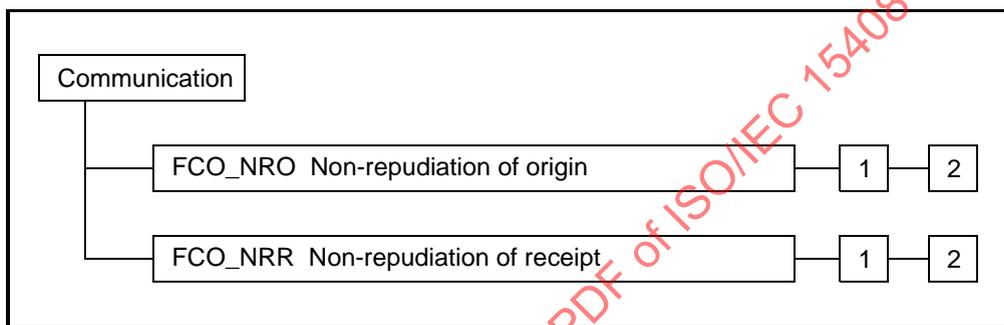


Figure 4.1 - Communication class decomposition


IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## 4.1 Non-repudiation of origin (FCO\_NRO)

### Family behaviour

Non-repudiation of origin ensures that the originator of information cannot successfully deny having sent the information. This family requires that the TSF provide a method to ensure that a subject that receives information during a data exchange is provided with evidence of the origin of the information. This evidence can then be verified by either this subject or other subjects.

### Component levelling



FCO\_NRO.1 Selective proof of origin requires the TSF to provide subjects with the capability to request evidence of the origin of information.

FCO\_NRO.2 Enforced proof of origin requires that the TSF always generate evidence of origin for transmitted information.

Management: FCO\_NRO.1, FCO\_NRO.2

The following actions could be considered for the management functions in FMT:

- a) The management of changes to information types, fields, originator attributes and recipients of evidence.

Audit: FCO\_NRO.1

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: The identity of the user who requested that evidence of origin would be generated.
- b) Minimal: The invocation of the non-repudiation service.
- c) Basic: Identification of the information, the destination, and a copy of the evidence provided.
- d) Detailed: The identity of the user who requested a verification of the evidence.

Audit: FCO\_NRO.2

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: The invocation of the non-repudiation service.

- b) Basic: Identification of the information, the destination, and a copy of the evidence provided.
- c) Detailed: The identity of the user who requested a verification of the evidence.

### FCO\_NRO.1 Selective proof of origin

Hierarchical to: No other components.

**FCO\_NRO.1.1** The TSF shall be able to generate evidence of origin for transmitted [assignment: *list of information types*] at the request of the [selection: *originator, recipient, [assignment: list of third parties]*].

**FCO\_NRO.1.2** The TSF shall be able to relate the [assignment: *list of attributes*] of the originator of the information, and the [assignment: *list of information fields*] of the information to which the evidence applies.

**FCO\_NRO.1.3** The TSF shall provide a capability to verify the evidence of origin of information to [selection: *originator, recipient, [assignment: list of third parties]*] given [assignment: *limitations on the evidence of origin*].

Dependencies: FIA\_UID.1 Timing of identification

### FCO\_NRO.2 Enforced proof of origin

Hierarchical to: FCO\_NRO.1

**FCO\_NRO.2.1** The TSF shall **enforce the generation of** evidence of origin for transmitted [assignment: *list of information types*] **at all times**.

**FCO\_NRO.2.2** The TSF shall be able to relate the [assignment: *list of attributes*] of the originator of the information, and the [assignment: *list of information fields*] of the information to which the evidence applies.

**FCO\_NRO.2.3** The TSF shall provide a capability to verify the evidence of origin of information to [selection: *originator, recipient, [assignment: list of third parties]*] given [assignment: *limitations on the evidence of origin*].

Dependencies: FIA\_UID.1 Timing of identification

## 4.2 Non-repudiation of receipt (FCO\_NRR)

### Family behaviour

Non-repudiation of receipt ensures that the recipient of information cannot successfully deny receiving the information. This family requires that the TSF provide a method to ensure that a subject that transmits information during a data exchange is provided with evidence of receipt of the information. This evidence can then be verified by either this subject or other subjects.

### Component levelling



FCO\_NRR.1 Selective proof of receipt requires the TSF to provide subjects with a capability to request evidence of the receipt of information.

FCO\_NRR.2 Enforced proof of receipt requires that the TSF always generate evidence of receipt for received information.

Management: FCO\_NRR.1, FCO\_NRR.2

The following actions could be considered for the management functions in FMT:

- a) The management of changes to information types, fields, originator attributes and third parties recipients of evidence.

Audit: FCO\_NRR.1

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: The identity of the user who requested that evidence of receipt would be generated.
- b) Minimal: The invocation of the non-repudiation service.
- c) Basic: Identification of the information, the destination, and a copy of the evidence provided.
- d) Detailed: The identity of the user who requested a verification of the evidence.

Audit: FCO\_NRR.2

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: The invocation of the non-repudiation service.
- b) Basic: Identification of the information, the destination, and a copy of the evidence provided.

- c) Detailed: The identity of the user who requested a verification of the evidence.

### **FCO\_NRR.1 Selective proof of receipt**

Hierarchical to: No other components.

**FCO\_NRR.1.1** The TSF shall be able to generate evidence of receipt for received [assignment: *list of information types*] at the request of the [selection: *originator, recipient, [assignment: list of third parties]*].

**FCO\_NRR.1.2** The TSF shall be able to relate the [assignment: *list of attributes*] of the recipient of the information, and the [assignment: *list of information fields*] of the information to which the evidence applies.

**FCO\_NRR.1.3** The TSF shall provide a capability to verify the evidence of receipt of information to [selection: *originator, recipient, [assignment: list of third parties]*] given [assignment: *limitations on the evidence of receipt*].

Dependencies: FIA\_UID.1 Timing of identification

### **FCO\_NRR.2 Enforced proof of receipt**

Hierarchical to: FCO\_NRR.1

**FCO\_NRR.2.1** The TSF shall **enforce the generation of** evidence of receipt for received [assignment: *list of information types*].

**FCO\_NRR.2.2** The TSF shall be able to relate the [assignment: *list of attributes*] of the recipient of the information, and the [assignment: *list of information fields*] of the information to which the evidence applies.

**FCO\_NRR.2.3** The TSF shall provide a capability to verify the evidence of receipt of information to [selection: *originator, recipient, [assignment: list of third parties]*] given [assignment: *limitations on the evidence of receipt*].

Dependencies: FIA\_UID.1 Timing of identification

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## 5 Class FCS: Cryptographic support

The TSF may employ cryptographic functionality to help satisfy several high-level security objectives. These include (but are not limited to): identification and authentication, non-repudiation, trusted path, trusted channel and data separation. This class is used when the TOE implements cryptographic functions, the implementation of which could be in hardware, firmware and/or software.

The FCS class is composed of two families: FCS\_CKM Cryptographic key management and FCS\_COP Cryptographic operation. The FCS\_CKM family addresses the management aspects of cryptographic keys, while the FCS\_COP family is concerned with the operational use of those cryptographic keys.

Figure 5.1 shows the decomposition of this class into its constituent components.

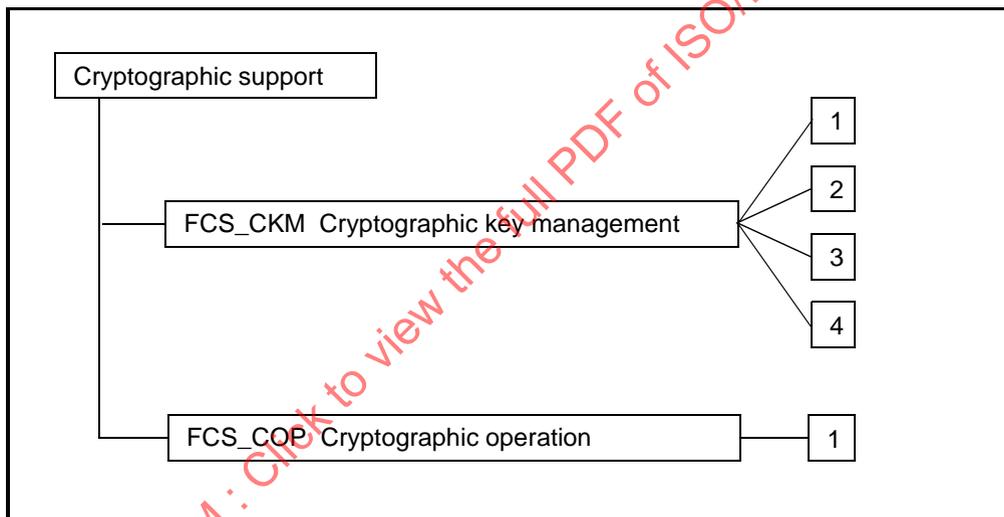



Figure 5.1 - Cryptographic support class decomposition

## 5.1 Cryptographic key management (FCS\_CKM)

### Family behaviour

Cryptographic keys must be managed throughout their life cycle. This family is intended to support that lifecycle and consequently defines requirements for the following activities: cryptographic key generation, cryptographic key distribution, cryptographic key access and cryptographic key destruction. This family should be included whenever there are functional requirements for the management of cryptographic keys.

### Component levelling

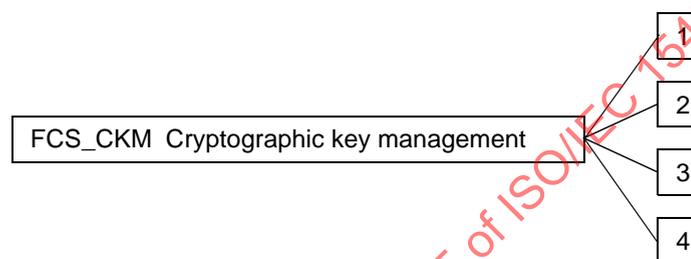

FCS\_CKM.1 Cryptographic key generation requires cryptographic keys to be generated in accordance with a specified algorithm and key sizes which can be based on an assigned standard.

FCS\_CKM.2 Cryptographic key distribution requires cryptographic keys to be distributed in accordance with a specified distribution method which can be based on an assigned standard.

FCS\_CKM.3 Cryptographic key access requires access to cryptographic keys to be performed in accordance with a specified access method which can be based on an assigned standard.

FCS\_CKM.4 Cryptographic key destruction requires cryptographic keys to be destroyed in accordance with a specified destruction method which can be based on an assigned standard.

Management: FCS\_CKM.1, FCS\_CKM.2, FCS\_CKM.3, FCS\_CKM.4

The following actions could be considered for the management functions in FMT:

- a) the management of changes to cryptographic key attributes. Examples of key attributes include user, key type (e.g. public, private, secret), validity period, and use (e.g. digital signature, key encryption, key agreement, data encryption).

Audit: FCS\_CKM.1, FCS\_CKM.2, FCS\_CKM.3, FCS\_CKM.4

The following actions should be auditable if FAU\_GEN Security Audit Data Generation is included in the PP/ST:

- a) Minimal: Success and failure of the activity.
- b) Basic: The object attribute(s), and object value(s) excluding any sensitive information (e.g. secret or private keys).

### **FCS\_CKM.1 Cryptographic key generation**

Hierarchical to: No other components.

**FCS\_CKM.1.1** The TSF shall generate cryptographic keys in accordance with a specified cryptographic key generation algorithm [assignment: *cryptographic key generation algorithm*] and specified cryptographic key sizes [assignment: *cryptographic key sizes*] that meet the following: [assignment: *list of standards*].

Dependencies: [FCS\_CKM.2 Cryptographic key distribution

or

FCS\_COP.1 Cryptographic operation]

FCS\_CKM.4 Cryptographic key destruction

FMT\_MSA.2 Secure security attributes

### **FCS\_CKM.2 Cryptographic key distribution**

Hierarchical to: No other components.

**FCS\_CKM.2.1** The TSF shall distribute cryptographic keys in accordance with a specified cryptographic key distribution method [assignment: *cryptographic key distribution method*] that meets the following: [assignment: *list of standards*].

Dependencies: [FDP\_ITC.1 Import of user data without security attributes

or

FCS\_CKM.1 Cryptographic key generation]

FCS\_CKM.4 Cryptographic key destruction

FMT\_MSA.2 Secure security attributes

### **FCS\_CKM.3 Cryptographic key access**

Hierarchical to: No other components.

**FCS\_CKM.3.1** The TSF shall perform [assignment: *type of cryptographic key access*] in accordance with a specified cryptographic key access method [assignment: *cryptographic key access method*] that meets the following: [assignment: *list of standards*].

Dependencies: [FDP\_ITC.1 Import of user data without security attributes

or

FCS\_CKM.1 Cryptographic key generation]

FCS\_CKM.4 Cryptographic key destruction

FMT\_MSA.2 Secure security attributes

**FCS\_CKM.4 Cryptographic key destruction**

Hierarchical to: No other components.

**FCS\_CKM.4.1** The TSF shall destroy cryptographic keys in accordance with a specified cryptographic key destruction method [assignment: *cryptographic key destruction method*] that meets the following: [assignment: *list of standards*].

Dependencies: [FDP\_ITC.1 Import of user data without security attributes

or

FCS\_CKM.1 Cryptographic key generation]

FMT\_MSA.2 Secure security attributes

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999


## 5.2 Cryptographic operation (FCS\_COP)

### Family behaviour

In order for a cryptographic operation to function correctly, the operation must be performed in accordance with a specified algorithm and with a cryptographic key of a specified size. This family should be included whenever there are requirements for cryptographic operations to be performed.

Typical cryptographic operations include data encryption and/or decryption, digital signature generation and/or verification, cryptographic checksum generation for integrity and/or verification of checksum, secure hash (message digest), cryptographic key encryption and/or decryption, and cryptographic key agreement.

### Component levelling



FCS\_COP.1 Cryptographic operation requires a cryptographic operation to be performed in accordance with a specified algorithm and with a cryptographic key of specified sizes. The specified algorithm and cryptographic key sizes can be based on an assigned standard.

Management: FCS\_COP.1

There are no management activities foreseen for these components.

Audit: FCS\_COP.1

The following actions should be auditable if FAU\_GEN Security Audit Data Generation is included in the PP/ST:

- a) Minimal: Success and failure, and the type of cryptographic operation.
- b) Basic: Any applicable cryptographic mode(s) of operation, subject attributes and object attributes.

### FCS\_COP.1 Cryptographic operation

Hierarchical to: No other components.

**FCS\_COP.1.1 The TSF shall perform [assignment: *list of cryptographic operations*] in accordance with a specified cryptographic algorithm [assignment: *cryptographic algorithm*] and cryptographic key sizes [assignment: *cryptographic key sizes*] that meet the following: [assignment: *list of standards*].**

Dependencies: [**FDP\_ITC.1 Import of user data without security attributes**

**or**

**FCS\_CKM.1 Cryptographic key generation]**

**FCS\_CKM.4 Cryptographic key destruction**

**FMT\_MSA.2 Secure security attributes**

*IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999*

## 6 Class FDP: User data protection

This class contains families specifying requirements for TOE security functions and TOE security function policies related to protecting user data. FDP is split into four groups of families (listed below) that address user data within a TOE, during import, export, and storage as well as security attributes directly related to user data.

The families in this class are organised into four groups:

a) User data protection security function policies:

- FDP\_ACC Access control policy; and
- FDP\_IFC Information flow control policy.

Components in these families permit the PP/ST author to name the user data protection security function policies and define the scope of control of the policy, necessary to address the security objectives. The names of these policies are meant to be used throughout the remainder of the functional components that have an operation that calls for an assignment or selection of an "access control SFP" or an "information flow control SFP". The rules that define the functionality of the named access control and information flow control SFPs will be defined in the FDP\_ACF and FDP\_IFF families (respectively).

b) Forms of user data protection:

- FDP\_ACF Access control functions;
- FDP\_IFF Information flow control functions;
- FDP\_ITT Internal TOE transfer;
- FDP\_RIP Residual information protection;
- FDP\_ROL Rollback; and
- FDP\_SDI Stored data integrity.

c) Off-line storage, import and export:

- FDP\_DAU Data authentication;
- FDP\_ETC Export to outside TSF control; and
- FDP\_ITC Import from outside TSF control.

Components in these families address the trustworthy transfer into or out of the TSC.

d) Inter-TSF communication:

- FDP\_UCT Inter-TSF user data confidentiality transfer protection; and
- FDP\_UIT Inter-TSF user data integrity transfer protection.

Components in these families address communication between the TSF of the TOE and another trusted IT product.

Figures 6.1 and 6.2 show the decomposition of this class into its constituent components.

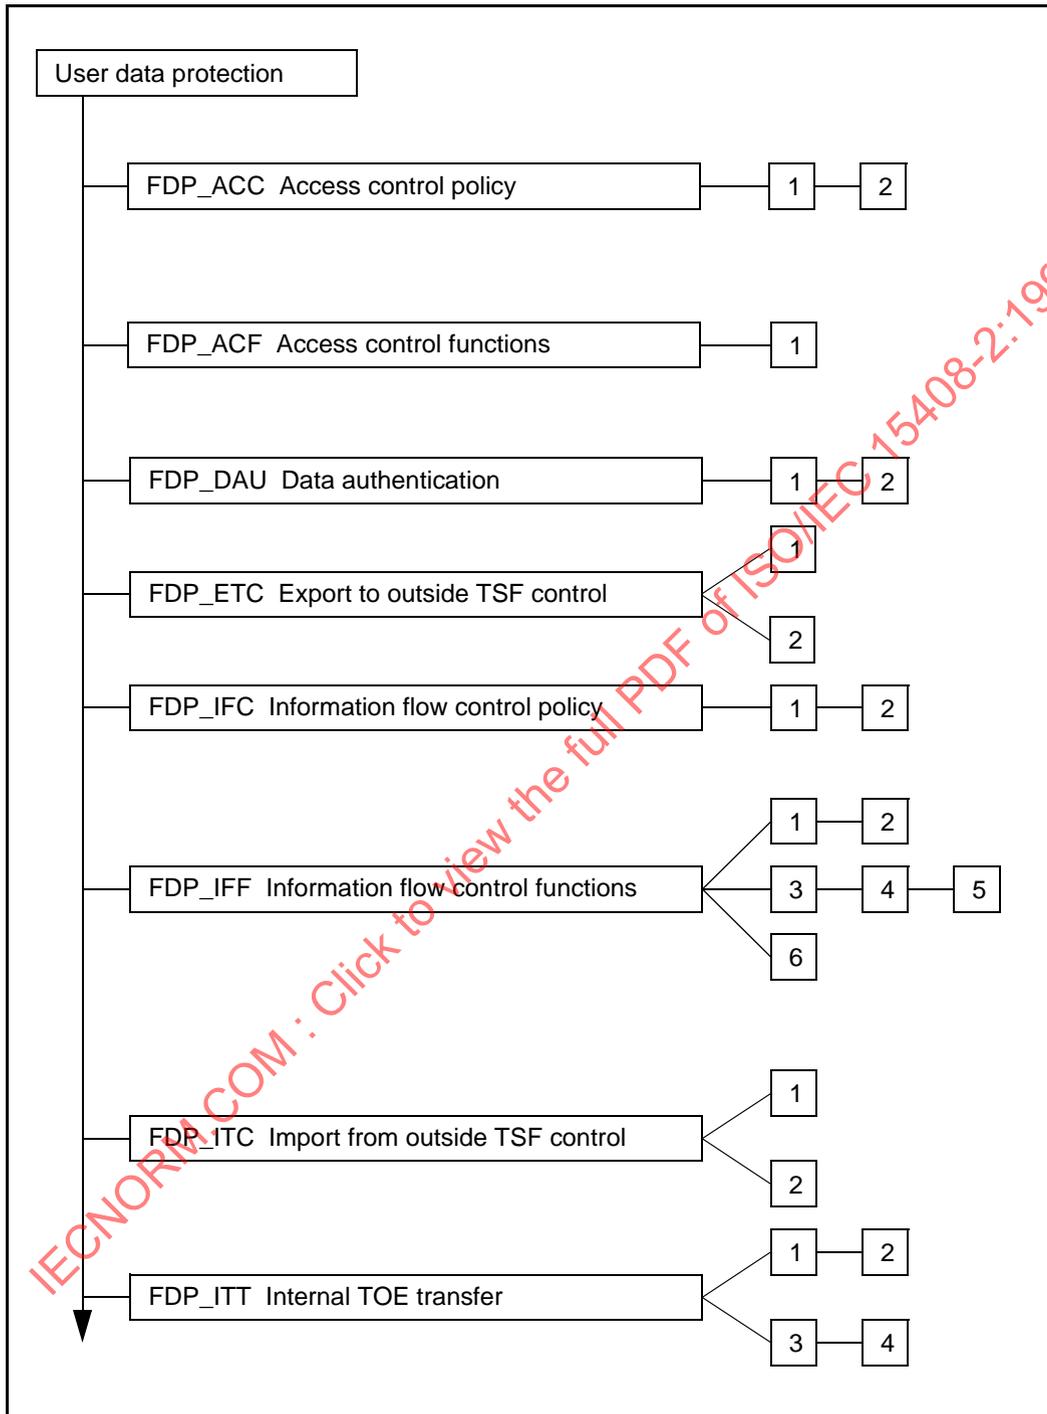


Figure 6.1 - User data protection class decomposition

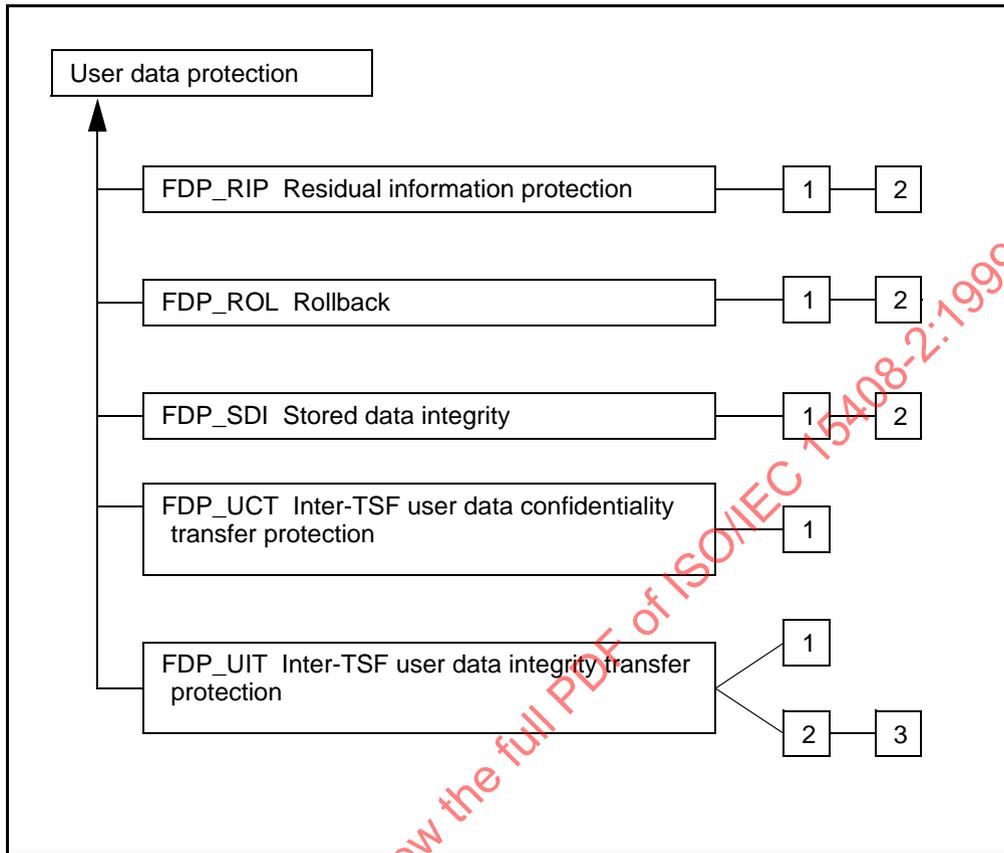


Figure 6.2 - User data protection class decomposition (cont.)

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## 6.1 Access control policy (FDP\_ACC)

### Family behaviour

This family identifies the access control SFPs (by name) and defines the scope of control of the policies that form the identified access control portion of the TSP. This scope of control is characterised by three sets: the subjects under control of the policy, the objects under control of the policy, and the operations among controlled subjects and controlled objects that are covered by the policy. The criteria allows multiple policies to exist, each having a unique name. This is accomplished by iterating components from this family once for each named access control policy. The rules that define the functionality of an access control SFP will be defined by other families such as FDP\_ACF and FDP\_SDI. The names of the access control SFPs identified here in FDP\_ACC are meant to be used throughout the remainder of the functional components that have an operation that calls for an assignment or selection of an “access control SFP.”

### Component levelling



FDP\_ACC.1 Subset access control requires that each identified access control SFP be in place for a subset of the possible operations on a subset of the objects in the TOE.

FDP\_ACC.2 Complete access control requires that each identified access control SFP cover all operations on subjects and objects covered by that SFP. It further requires that all objects and operations with the TSC are covered by at least one identified access control SFP.

Management: FDP\_ACC.1, FDP\_ACC.2

There are no management activities foreseen for this component.

Audit: FDP\_ACC.1, FDP\_ACC.2

There are no events identified that should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST.

### FDP\_ACC.1 Subset access control

Hierarchical to: No other components.

**FDP\_ACC.1.1** The TSF shall enforce the [assignment: *access control SFP*] on [assignment: *list of subjects, objects, and operations among subjects and objects covered by the SFP*].

Dependencies: FDP\_ACF.1 Security attribute based access control

## **FDP\_ACC.2 Complete access control**

Hierarchical to: FDP\_ACC.1

**FDP\_ACC.2.1** The TSF shall enforce the [assignment: *access control SFP*] on [assignment: *list of subjects and objects*] **and all operations among subjects and objects covered by the SFP.**

**FDP\_ACC.2.2** **The TSF shall ensure that all operations between any subject in the TSC and any object within the TSC are covered by an access control SFP.**

Dependencies: FDP\_ACF.1 Security attribute based access control


IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## 6.2 Access control functions (FDP\_ACF)

### Family behaviour

This family describes the rules for the specific functions that can implement an access control policy named in FDP\_ACC. FDP\_ACC specifies the scope of control of the policy.

### Component levelling



This family addresses security attribute usage and characteristics of policies. The component within this family is meant to be used to describe the rules for the function that implements the SFP as identified in FDP\_ACC. The PP/ST author may also iterate this component to address multiple policies in the TOE.

FDP\_ACF.1 Security attribute based access control allows the TSF to enforce access based upon security attributes and named groups of attributes. Furthermore, the TSF may have the ability to explicitly authorise or deny access to an object based upon security attributes.

Management: FDP\_ACF.1

The following actions could be considered for the management functions in FMT Management:

- a) Managing the attributes used to make explicit access or denial based decisions.

Audit: FDP\_ACF.1

The following events should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: Successful requests to perform an operation on an object covered by the SFP.
- b) Basic: All requests to perform an operation on an object covered by the SFP.
- c) Detailed: The specific security attributes used in making an access check.

### FDP\_ACF.1 Security attribute based access control

Hierarchical to: No other components.

**FDP\_ACF.1.1 The TSF shall enforce the [assignment: *access control SFP*] to objects based on [assignment: *security attributes, named groups of security attributes*].**

- FDP\_ACF.1.2** The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed: [assignment: *rules governing access among controlled subjects and controlled objects using controlled operations on controlled objects*].
- FDP\_ACF.1.3** The TSF shall explicitly authorise access of subjects to objects based on the following additional rules: [assignment: *rules, based on security attributes, that explicitly authorise access of subjects to objects*].
- FDP\_ACF.1.4** The TSF shall explicitly deny access of subjects to objects based on the [assignment: *rules, based on security attributes, that explicitly deny access of subjects to objects*].

Dependencies: **FDP\_ACC.1** Subset access control

**FMT\_MSA.3** Static attribute initialisation


IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

### 6.3 Data authentication (FDP\_DAU)

#### Family behaviour

Data authentication permits an entity to accept responsibility for the authenticity of information (e.g., by digitally signing it). This family provides a method of providing a guarantee of the validity of a specific unit of data that can be subsequently used to verify that the information content has not been forged or fraudulently modified. In contrast to Class FCO, this family is intended to be applied to "static" data rather than data that is being transferred.

#### Component levelling



FDP\_DAU.1 Basic Data Authentication requires that the TSF is capable of generating a guarantee of authenticity of the information content of objects (e.g. documents).

FDP\_DAU.2 Data Authentication with Identity of Guarantor additionally requires that the TSF is capable of establishing the identity of the subject who provided the guarantee of authenticity.

Management: FDP\_DAU.1, FDP\_DAU.2

The following actions could be considered for the management functions in FMT Management:

- a) The assignment or modification of the objects for which data authentication may apply could be configurable in the system.

Audit: FDP\_DAU.1

The following events should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST.

- a) Minimal: Successful generation of validity evidence.
- b) Basic: Unsuccessful generation of validity evidence.
- c) Detailed: The identity of the subject that requested the evidence.

Audit: FDP\_DAU.2

The following events should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST.

- a) Minimal: Successful generation of validity evidence.
- b) Basic: Unsuccessful generation of validity evidence.
- c) Detailed: The identity of the subject that requested the evidence.

- d) Detailed: The identity of the subject that generated the evidence.

#### **FDP\_DAU.1 Basic data authentication**

Hierarchical to: No other components.

**FDP\_DAU.1.1** The TSF shall provide a capability to generate evidence that can be used as a guarantee of the validity of [assignment: *list of objects or information types*].

**FDP\_DAU.1.2** The TSF shall provide [assignment: *list of subjects*] with the ability to verify evidence of the validity of the indicated information.

Dependencies: No dependencies.

#### **FDP\_DAU.2 Data authentication with identity of guarantor**

Hierarchical to: **FDP\_DAU.1**

**FDP\_DAU.2.1** The TSF shall provide a capability to generate evidence that can be used as a guarantee of the validity of [assignment: *list of objects or information types*].

**FDP\_DAU.2.2** The TSF shall provide [assignment: *list of subjects*] with the ability to verify evidence of the validity of the indicated information **and the identity of the user that generated the evidence.**

Dependencies: **FIA\_UID.1 Timing of identification**


IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## 6.4 Export to outside TSF control (FDP\_ETC)

### Family behaviour

This family defines functions for exporting user data from the TOE such that its security attributes and protection either can be explicitly preserved or can be ignored once it has been exported. It is concerned with limitations on export and with the association of security attributes with the exported user data.

### Component levelling

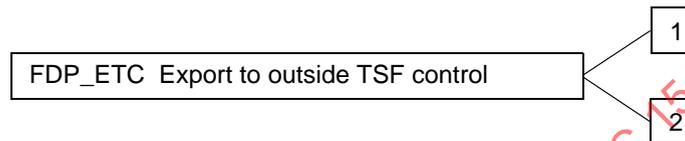

FDP\_ETC.1 Export of user data without security attributes requires that the TSF enforce the appropriate SFPs when exporting user data outside the TSF. User data that is exported by this function is exported without its associated security attributes.

FDP\_ETC.2 Export of user data with security attributes requires that the TSF enforce the appropriate SFPs using a function that accurately and unambiguously associates security attributes with the user data that is exported.

Management: FDP\_ETC.1

There are no management activities foreseen for this component.

Management: FDP\_ETC.2

The following actions could be considered for the management functions in FMT Management:

- a) The additional exportation control rules could be configurable by a user in a defined role.

Audit: FDP\_ETC.1, FDP\_ETC.2

The following events shall be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: Successful export of information.
- b) Basic: All attempts to export information.

**FDP\_ETC.1 Export of user data without security attributes**

Hierarchical to: No other components.

**FDP\_ETC.1.1** The TSF shall enforce the [assignment: *access control SFP(s) and/or information flow control SFP(s)*] when exporting user data, controlled under the SFP(s), outside of the TSC.

**FDP\_ETC.1.2** The TSF shall export the user data without the user data's associated security attributes.

Dependencies: [FDP\_ACC.1 Subset access control, or  
FDP\_IFC.1 Subset information flow control]

**FDP\_ETC.2 Export of user data with security attributes**

Hierarchical to: No other components.

**FDP\_ETC.2.1** The TSF shall enforce the [assignment: *access control SFP(s) and/or information flow control SFP(s)*] when exporting user data, controlled under the SFP(s), outside of the TSC.

**FDP\_ETC.2.2** The TSF shall export the user data with the user data's associated security attributes.

**FDP\_ETC.2.3** The TSF shall ensure that the security attributes, when exported outside the TSC, are unambiguously associated with the exported user data.

**FDP\_ETC.2.4** The TSF shall enforce the following rules when user data is exported from the TSC: [assignment: *additional exportation control rules*].

Dependencies: [FDP\_ACC.1 Subset access control, or  
FDP\_IFC.1 Subset information flow control]

## 6.5 Information flow control policy (FDP\_IFC)

### Family behaviour

This family identifies the information flow control SFPs (by name) and defines the scope of control of the policies that form the identified information flow control portion of the TSP. This scope of control is characterised by three sets: the subjects under control of the policy, the information under control of the policy, and operations which cause controlled information to flow to and from controlled subjects covered by the policy. The criteria allows multiple policies to exist, each having a unique name. This is accomplished by iterating components from this family once for each named information flow control policy. The rules that define the functionality of an information flow control SFP will be defined by other families such as FDP\_IFF and FDP\_SDI. The names of the information flow control SFPs identified here in FDP\_IFC are meant to be used throughout the remainder of the functional components that have an operation that calls for an assignment or selection of an “information flow control SFP.”

The TSF mechanism controls the flow of information in accordance with the information flow control SFP. Operations that would change the security attributes of information are not generally permitted as this would be in violation of an information flow control SFP. However, such operations may be permitted as exceptions to the information flow control SFP if explicitly specified.

### Component levelling



FDP\_IFC.1 Subset information flow control requires that each identified information flow control SFPs be in place for a subset of the possible operations on a subset of information flows in the TOE.

FDP\_IFC.2 Complete information flow control requires that each identified information flow control SFP cover all operations on subjects and information covered by that SFP. It further requires that all information flows and operations with the TSC are covered by at least one identified information flow control SFP. In conjunction with the FPT\_RVM.1 component, this gives the “always invoked” aspect of a reference monitor.

Management: FDP\_IFC.1, FDP\_IFC.2

There are no management activities foreseen for this component.

Audit: FDP\_IFC.1, FDP\_IFC.2

There are no events identified that should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST.

**FDP\_IFC.1 Subset information flow control**

Hierarchical to: No other components.

**FDP\_IFC.1.1** The TSF shall enforce the [assignment: *information flow control SFP*] on [assignment: *list of subjects, information, and operations that cause controlled information to flow to and from controlled subjects covered by the SFP*].

Dependencies: **FDP\_IFF.1 Simple security attributes**

**FDP\_IFC.2 Complete information flow control**

Hierarchical to: FDP\_IFC.1

**FDP\_IFC.2.1** The TSF shall enforce the [assignment: *information flow control SFP*] on [assignment: *list of subjects and information*] and **all operations that cause that information to flow to and from subjects covered by the SFP.**

**FDP\_IFC.2.2** **The TSF shall ensure that all operations that cause any information in the TSC to flow to and from any subject in the TSC are covered by an information flow control SFP.**

Dependencies: FDP\_IFF.1 Simple security attributes


IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## 6.6 Information flow control functions (FDP\_IFF)

### Family behaviour

This family describes the rules for the specific functions that can implement the information flow control SFPs named in FDP\_IFC, which also specifies the scope of control of the policy. It consists of two kinds of requirements: one addressing the common information flow function issues, and a second addressing illicit information flows (i.e. covert channels). This division arises because the issues concerning illicit information flows are, in some sense, orthogonal to the rest of an information flow control SFP. By their nature they circumvent the information flow control SFP resulting in a violation of the policy. As such, they require special functions to either limit or prevent their occurrence.

### Component levelling

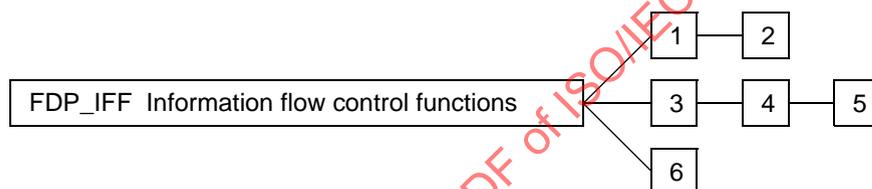

FDP\_IFF.1 Simple security attributes requires security attributes on information, and on subjects that cause that information to flow and on subjects that act as recipients of that information. It specifies the rules that must be enforced by the function, and describes how security attributes are derived by the function.

FDP\_IFF.2 Hierarchical security attributes expands on the requirements of FDP\_IFF.1 Simple security attributes by requiring that all information flow control SFPs in the TSP use hierarchical security attributes that form a lattice.

FDP\_IFF.3 Limited illicit information flows requires the SFP to cover illicit information flows, but not necessarily eliminate them.

FDP\_IFF.4 Partial elimination of illicit information flows requires the SFP to cover the elimination of some (but not necessarily all) illicit information flows.

FDP\_IFF.5 No illicit information flows requires SFP to cover the elimination of all illicit information flows.

FDP\_IFF.6 Illicit information flow monitoring requires the SFP to monitor illicit information flows for specified and maximum capacities.

Management: FDP\_IFF.1, FDP\_IFF.2

The following actions could be considered for the management functions in FMT Management:

- a) Managing the attributes used to make explicit access based decisions.

Management: FDP\_IFF.3, FDP\_IFF.4, FDP\_IFF.5

There are no management activities foreseen for these components.

Management: FDP\_IFF.6

The following actions could be considered for the management functions in FMT Management:

- a) The enabling or disabling of the monitoring function.
- b) Modification of the maximum capacity at which the monitoring occurs.

Audit: FDP\_IFF.1, FDP\_IFF.2, FDP\_IFF.5

The following events should be auditable if FAU\_GEN Security audit data generation is included in a PP/ST:

- a) Minimal: Decisions to permit requested information flows.
- b) Basic: All decisions on requests for information flow.
- c) Detailed: The specific security attributes used in making an information flow enforcement decision.
- d) Detailed: Some specific subsets of the information that has flowed based upon policy goals (e.g. auditing of downgraded material).

Audit: FDP\_IFF.3, FDP\_IFF.4, FDP\_IFF.6

The following events should be auditable if FAU\_GEN Security audit data generation is included in a PP/ST:

- a) Minimal: Decisions to permit requested information flows.
- b) Basic: All decisions on requests for information flow.
- c) Basic: The use of identified illicit information flow channels.
- d) Detailed: The specific security attributes used in making an information flow enforcement decision.
- e) Detailed: Some specific subsets of the information that has flowed based upon policy goals (e.g. auditing of downgraded material).
- f) Detailed: The use of identified illicit information flow channels with estimated maximum capacity exceeding a specified value.

**FDP\_IFF.1 Simple security attributes**

Hierarchical to: No other components.

- FDP\_IFF.1.1** The TSF shall enforce the [assignment: *information flow control SFP*] based on the following types of subject and information security attributes: [assignment: *the minimum number and type of security attributes*].
- FDP\_IFF.1.2** The TSF shall permit an information flow between a controlled subject and controlled information via a controlled operation if the following rules hold: [assignment: *for each operation, the security attribute-based relationship that must hold between subject and information security attributes*].
- FDP\_IFF.1.3** The TSF shall enforce the [assignment: *additional information flow control SFP rules*].
- FDP\_IFF.1.4** The TSF shall provide the following [assignment: *list of additional SFP capabilities*].
- FDP\_IFF.1.5** The TSF shall explicitly authorise an information flow based on the following rules: [assignment: *rules, based on security attributes, that explicitly authorise information flows*].
- FDP\_IFF.1.6** The TSF shall explicitly deny an information flow based on the following rules: [assignment: *rules, based on security attributes, that explicitly deny information flows*].

Dependencies: **FDP\_IFC.1 Subset information flow control**  
**FMT\_MSA.3 Static attribute initialisation**

**FDP\_IFF.2 Hierarchical security attributes**

Hierarchical to: FDP\_IFF.1

- FDP\_IFF.2.1** The TSF shall enforce the [assignment: *information flow control SFP*] based on the following types of subject and information security attributes: [assignment: *the minimum number and type of security attributes*].
- FDP\_IFF.2.2** The TSF shall permit an information flow between a controlled subject and controlled information via a controlled operation if the following rules, **based on the ordering relationships between security attributes** hold: [assignment: *for each operation, the security attribute-based relationship that must hold between subject and information security attributes*].
- FDP\_IFF.2.3** The TSF shall enforce the [assignment: *additional information flow control SFP rules*].
- FDP\_IFF.2.4** The TSF shall provide the following [assignment: *list of additional SFP capabilities*]

**FDP\_IFF.2.5** The TSF shall explicitly authorise an information flow based on the following rules: [assignment: *rules, based on security attributes, that explicitly authorise information flows*].

**FDP\_IFF.2.6** The TSF shall explicitly deny an information flow based on the following rules: [assignment: *rules, based on security attributes, that explicitly deny information flows*].

**FDP\_IFF.2.7** The TSF shall enforce the following relationships for any two valid information flow control security attributes:

- a) There exists an ordering function that, given two valid security attributes, determines if the security attributes are equal, if one security attribute is greater than the other, or if the security attributes are incomparable; and
- b) There exists a “least upper bound” in the set of security attributes, such that, given any two valid security attributes, there is a valid security attribute that is greater than or equal to the two valid security attributes; and
- c) There exists a “greatest lower bound” in the set of security attributes, such that, given any two valid security attributes, there is a valid security attribute that is not greater than the two valid security attributes.

Dependencies: FDP\_IFC.1 Subset information flow control  
FMT\_MSA.3 Static attribute initialisation

### **FDP\_IFF.3 Limited illicit information flows**

Hierarchical to: No other components.

**FDP\_IFF.3.1** The TSF shall enforce the [assignment: *information flow control SFP*] to limit the capacity of [assignment: *types of illicit information flows*] to a [assignment: *maximum capacity*].

Dependencies: AVA\_CCA.1 Covert channel analysis  
FDP\_IFC.1 Subset information flow control

### **FDP\_IFF.4 Partial elimination of illicit information flows**

Hierarchical to: FDP\_IFF.3

**FDP\_IFF.4.1** The TSF shall enforce the [assignment: *information flow control SFP*] to limit the capacity of [assignment: *types of illicit information flows*] to a [assignment: *maximum capacity*].

**FDP\_IFF.4.2** The TSF shall prevent [assignment: *types of illicit information flows*].

Dependencies: AVA\_CCA.1 Covert channel analysis

FDP\_IFC.1 Subset information flow control

**FDP\_IFF.5** No illicit information flows

Hierarchical to: FDP\_IFF.4

**FDP\_IFF.5.1** The TSF shall ensure that no illicit information flows exist to circumvent [assignment: *name of information flow control SFP*].

Dependencies: AVA\_CCA.3 Exhaustive covert channel analysis

FDP\_IFC.1 Subset information flow control

**FDP\_IFF.6** Illicit information flow monitoring

Hierarchical to: No other components.

**FDP\_IFF.6.1** The TSF shall enforce the [assignment: *information flow control SFP*] to monitor [assignment: *types of illicit information flows*] when it exceeds the [assignment: *maximum capacity*].

Dependencies: AVA\_CCA.1 Covert channel analysis


FDP\_IFC.1 Subset information flow control

## 6.7 Import from outside TSF control (FDP\_ITC)

### Family behaviour

This family defines the mechanisms for introduction of user data into the TOE such that it has appropriate security attributes and is appropriately protected. It is concerned with limitations on importation, determination of desired security attributes, and interpretation of security attributes associated with the user data.

### Component levelling

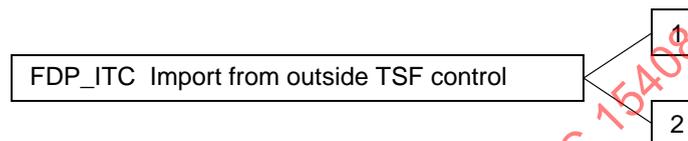

This family contains two components to address the preservation of security attributes of imported user data for access control and information control policies.

Component FDP\_ITC.1 Import of user data without security attributes requires that the security attributes correctly represent the user data and are supplied separately from the object.

Component FDP\_ITC.2 Import of user data with security attributes requires that security attributes correctly represent the user data and are accurately and unambiguously associated with the user data imported from outside the TSC.

Management: FDP\_ITC.1, FDP\_ITC.2

The following actions could be considered for the management functions in FMT Management:

- a) The modification of the additional control rules used for import.

Audit: FDP\_ITC.1, FDP\_ITC.2

The following events should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: Successful import of user data, including any security attributes.
- b) Basic: All attempts to import user data, including any security attributes.
- c) Detailed: The specification of security attributes for imported user data supplied by an authorised user.

**FDP\_ITC.1 Import of user data without security attributes**

Hierarchical to: No other components.

**FDP\_ITC.1.1** The TSF shall enforce the [assignment: *access control SFP and/or information flow control SFP*] when importing user data, controlled under the SFP, from outside of the TSC.

**FDP\_ITC.1.2** The TSF shall ignore any security attributes associated with the user data when imported from outside the TSC.

**FDP\_ITC.1.3** The TSF shall enforce the following rules when importing user data controlled under the SFP from outside the TSC: [assignment: *additional importation control rules*].

Dependencies: [FDP\_ACC.1 Subset access control, or  
FDP\_IFC.1 Subset information flow control]  
FMT\_MSA.3 Static attribute initialisation

**FDP\_ITC.2 Import of user data with security attributes**

Hierarchical to: No other components.

**FDP\_ITC.2.1** The TSF shall enforce the [assignment: *access control SFP and/or information flow control SFP*] when importing user data, controlled under the SFP, from outside of the TSC.

**FDP\_ITC.2.2** The TSF shall use the security attributes associated with the imported user data.

**FDP\_ITC.2.3** The TSF shall ensure that the protocol used provides for the unambiguous association between the security attributes and the user data received.

**FDP\_ITC.2.4** The TSF shall ensure that interpretation of the security attributes of the imported user data is as intended by the source of the user data.

**FDP\_ITC.2.5** The TSF shall enforce the following rules when importing user data controlled under the SFP from outside the TSC: [assignment: *additional importation control rules*].


Dependencies: [FDP\_ACC.1 Subset access control, or  
FDP\_IFC.1 Subset information flow control]  
[FTP\_ITC.1 Inter-TSF trusted channel, or  
FTP\_TRP.1 Trusted path]  
FPT\_TDC.1 Inter-TSF basic TSF data consistency

## 6.8 Internal TOE transfer (FDP\_ITT)

### Family behaviour

This family provides requirements that address protection of user data when it is transferred between parts of a TOE across an internal channel. This may be contrasted with the FDP\_UCT and FDP\_UTI families, which provide protection for user data when it is transferred between distinct TSFs across an external channel, and FDP\_ETC and FDP\_ITC, which address transfer of data to or from outside the TSF's control.

### Component levelling

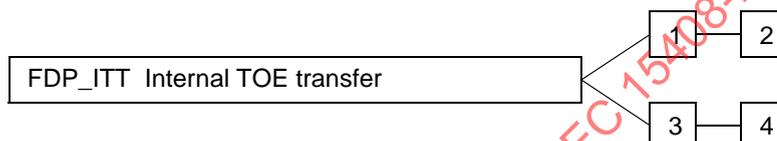

FDP\_ITT.1 Basic internal transfer protection requires that user data be protected when transmitted between parts of the TOE.

FDP\_ITT.2 Transmission separation by attribute requires separation of data based on the value of SFP-relevant attributes in addition to the first component.

FDP\_ITT.3 Integrity monitoring requires that the SF monitor user data transmitted between parts of the TOE for identified integrity errors.

FDP\_ITT.4 Attribute-based integrity monitoring expands on the third component by allowing the form of integrity monitoring to differ by SFP-relevant attribute.

Management: FDP\_ITT.1, FDP\_ITT.2

The following actions could be considered for the management functions in FMT Management:

- a) If the TSF provides multiple methods to protect user data during transmission between physically separated parts of the TOE, the TSF could provide a pre-defined role with the ability to select the method that will be used.

Management: FDP\_ITT.3, FDP\_ITT.4

The following actions could be considered for the management functions in FMT Management:

- a) The specification of the actions to be taken upon detection of an integrity error could be configurable.

Audit: FDP\_ITT.1, FDP\_ITT.2

The following events should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: Successful transfers of user data, including identification of the protection method used.
- b) Basic: All attempts to transfer user data, including the protection method used and any errors that occurred.

Audit: FDP\_ITT.3, FDP\_ITT.4

The following events should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: Successful transfers of user data, including identification of the integrity protection method used.
- b) Basic: All attempts to transfer user data, including the integrity protection method used and any errors that occurred.
- c) Basic: Unauthorised attempts to change the integrity protection method.
- d) Detailed: The action taken upon detection of an integrity error.

### **FDP\_ITT.1 Basic internal transfer protection**

Hierarchical to: No other components.

**FDP\_ITT.1.1** The TSF shall enforce the [assignment: *access control SFP(s) and/or information flow control SFP(s)*] to prevent the [selection: *disclosure, modification, loss of use*] of user data when it is transmitted between physically-separated parts of the TOE.

Dependencies: [FDP\_ACC.1 Subset access control, or  
FDP\_IFC.1 Subset information flow control]

### **FDP\_ITT.2 Transmission separation by attribute**

Hierarchical to: FDP\_ITT.1

**FDP\_ITT.2.1** The TSF shall enforce the [assignment: *access control SFP(s) and/or information flow control SFP(s)*] to prevent the [selection: *disclosure, modification, loss of use*] of user data when it is transmitted between physically-separated parts of the TOE.

**FDP\_ITT.2.2** The TSF shall separate data controlled by the SFP(s) when transmitted between physically-separated parts of the TOE, based on the values of the following: [assignment: *security attributes that require separation*].

Dependencies: [FDP\_ACC.1 Subset access control, or  
FDP\_IFC.1 Subset information flow control]

**FDP\_ITT.3 Integrity monitoring**

Hierarchical to: No other components.

**FDP\_ITT.3.1** The TSF shall enforce the [assignment: *access control SFP(s) and/or information flow control SFP(s)*] to monitor user data transmitted between physically-separated parts of the TOE for the following errors: [assignment: *integrity errors*].

**FDP\_ITT.3.2** Upon detection of a data integrity error, the TSF shall [assignment: *specify the action to be taken upon integrity error*].

Dependencies: [FDP\_ACC.1 Subset access control, or  
FDP\_IFC.1 Subset information flow control]  
FDP\_ITT.1 Basic internal transfer protection

**FDP\_ITT.4 Attribute-based integrity monitoring**

Hierarchical to: FDP\_ITT.3

**FDP\_ITT.4.1** The TSF shall enforce the [assignment: *access control SFP(s) and/or information flow control SFP(s)*] to monitor user data transmitted between physically-separated parts of the TOE for the following errors: [assignment: *integrity errors*], **based on the following attributes:** [assignment: *security attributes that require separate transmission channels*].

**FDP\_ITT.4.2** Upon detection of a data integrity error, the TSF shall [assignment: *specify the action to be taken upon integrity error*].


Dependencies: [FDP\_ACC.1 Subset access control, or  
FDP\_IFC.1 Subset information flow control]  
FDP\_ITT.2 Transmission separation by attribute

## 6.9 Residual information protection (FDP\_RIP)

### Family behaviour

This family addresses the need to ensure that deleted information is no longer accessible, and that newly created objects do not contain information that should not be accessible. This family requires protection for information that has been logically deleted or released, but may still be present within the TOE.

### Component levelling



FDP\_RIP.1 Subset residual information protection requires that the TSF ensure that any residual information content of any resources is unavailable to a defined subset of the objects in the TSC upon the resource's allocation or deallocation.

FDP\_RIP.2 Full residual information protection requires that the TSF ensure that any residual information content of any resources is unavailable to all objects upon the resource's allocation or deallocation.

Management: FDP\_RIP.1, FDP\_RIP.2

The following actions could be considered for the management functions in FMT Management:

- a) The choice of when to perform residual information protection (i.e. upon allocation or deallocation) could be made configurable within the TOE.

Audit: FDP\_RIP.1, FDP\_RIP.2

There are no events identified that should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST.

### FDP\_RIP.1 Subset residual information protection

Hierarchical to: No other components.

**FDP\_RIP.1.1** The TSF shall ensure that any previous information content of a resource is made unavailable upon the [selection: *allocation of the resource to, deallocation of the resource from*] the following objects: [assignment: *list of objects*].

Dependencies: No dependencies.

**FDP\_RIP.2 Full residual information protection**

Hierarchical to: **FDP\_RIP.1**

**FDP\_RIP.2.1** The TSF shall ensure that any previous information content of a resource is made unavailable upon the [selection: *allocation of the resource to, deallocation of the resource from*] **all objects**.

Dependencies: No dependencies.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## 6.10 Rollback (FDP\_ROL)

### Family behaviour

The rollback operation involves undoing the last operation or a series of operations, bounded by some limit, such as a period of time, and return to a previous known state. Rollback provides the ability to undo the effects of an operation or series of operations to preserve the integrity of the user data.

### Component levelling



FDP\_ROL.1 Basic rollback addresses a need to roll back or undo a limited number of operations within the defined bounds.

FDP\_ROL.2 Advanced rollback addresses the need to roll back or undo all operations within the defined bounds.

Management: FDP\_ROL.1, FDP\_ROL.2

The following actions could be considered for the management functions in FMT Management:

- a) The boundary limit to which rollback may be performed could be a configurable item within the TOE.
- b) Permission to perform a rollback operation could be restricted to a well defined role.

Audit: FDP\_ROL.1, FDP\_ROL.2

The following events should be auditable if FAU\_GEN Security audit data generation is specified in the PP/ST:

- a) Minimal: All successful rollback operations.
- b) Basic: All attempts to perform rollback operations.
- c) Detailed: All attempts to perform rollback operations, including identification of the types of operations rolled back.

### FDP\_ROL.1 Basic rollback

Hierarchical to: No other components.

**FDP\_ROL.1.1** The TSF shall enforce [assignment: *access control SFP(s) and/or information flow control SFP(s)*] to permit the rollback of the [assignment: *list of operations*] on the [assignment: *list of objects*].

**FDP\_ROL.1.2** The TSF shall permit operations to be rolled back within the [assignment: *boundary limit to which rollback may be performed*].

Dependencies: [FDP\_ACC.1 Subset access control, or  
FDP\_IFC.1 Subset information flow control]

## **FDP\_ROL.2 Advanced rollback**

Hierarchical to: FDP\_ROL.1

**FDP\_ROL.2.1** The TSF shall enforce [assignment: *access control SFP(s) and/or information flow control SFP(s)*] to permit the rollback of **all the operations** on the [assignment: *list of objects*].

**FDP\_ROL.2.2** The TSF shall permit operations to be rolled back within the [assignment: *boundary limit to which rollback may be performed*].

Dependencies: [FDP\_ACC.1 Subset access control, or  
FDP\_IFC.1 Subset information flow control]


IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## 6.11 Stored data integrity (FDP\_SDI)

### Family behaviour

This family provides requirements that address protection of user data while it is stored within the TSC. Integrity errors may affect user data stored in memory, or in a storage device. This family differs from FDP\_ITT Internal TOE transfer which protects the user data from integrity errors while being transferred within the TOE.

### Component levelling



FDP\_SDI.1 Stored data integrity monitoring requires that the SF monitor user data stored within the TSC for identified integrity errors.

FDP\_SDI.2 Stored data integrity monitoring and action adds the additional capability to the first component by allowing for actions to be taken as a result of an error detection.

#### Management: FDP\_SDI.1

There are no management activities foreseen for this component.

#### Management: FDP\_SDI.2

The following actions could be considered for the management functions in FMT Management:

- a) The actions to be taken upon the detection of an integrity error could be configurable.

#### Audit: FDP\_SDI.1

The following events should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: Successful attempts to check the integrity of user data, including an indication of the results of the check.
- b) Basic: All attempts to check the integrity of user data, including an indication of the results of the check, if performed.
- c) Detailed: The type of integrity error that occurred.

#### Audit: FDP\_SDI.2

The following events should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: Successful attempts to check the integrity of user data, including an indication of the results of the check.
- b) Basic: All attempts to check the integrity of user data, including an indication of the results of the check, if performed.
- c) Detailed: The type of integrity error that occurred.
- d) Detailed: The action taken upon detection of an integrity error.

### **FDP\_SDI.1 Stored data integrity monitoring**

Hierarchical to: No other components.

**FDP\_SDI.1.1** The TSF shall monitor user data stored within the TSC for [assignment: *integrity errors*] on all objects, based on the following attributes: [assignment: *user data attributes*].

Dependencies: No dependencies.

### **FDP\_SDI.2 Stored data integrity monitoring and action**

Hierarchical to: FDP\_SDI.1

**FDP\_SDI.2.1** The TSF shall monitor user data stored within the TSC for [assignment: *integrity errors*] on all objects, based on the following attributes: [assignment: *user data attributes*].

**FDP\_SDI.2.2** Upon detection of a data integrity error, the TSF shall [assignment: *action to be taken*].


Dependencies: No dependencies.

## 6.12 Inter-TSF user data confidentiality transfer protection (FDP\_UCT)

Family behaviour

This family defines the requirements for ensuring the confidentiality of user data when it is transferred using an external channel between distinct TOEs or users on distinct TOEs.

Component levelling



In FDP\_UCT.1 Basic data exchange confidentiality, the goal is to provide protection from disclosure of user data while in transit.

Management: FDP\_UCT.1

There are no management activities foreseen for this component.

Audit: FDP\_UCT.1

The following events should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST.

- a) Minimal: The identity of any user or subject using the data exchange mechanisms.
- b) Basic: The identity of any unauthorised user or subject attempting to use the data exchange mechanisms.
- c) Basic: A reference to the names or other indexing information useful in identifying the user data that was transmitted or received. This could include security attributes associated with the information.

### FDP\_UCT.1 Basic data exchange confidentiality

Hierarchical to: No other components.

**FDP\_UCT.1.1 The TSF shall enforce the [assignment: *access control SFP(s)* and/or *information flow control SFP(s)*] to be able to [selection: *transmit, receive*] objects in a manner protected from unauthorised disclosure.**


Dependencies: [FTP\_ITC.1 Inter-TSF trusted channel, or  
 FTP\_TRP.1 Trusted path]  
 [FDP\_ACC.1 Subset access control, or  
 FDP\_IFC.1 Subset information flow control]

## 6.13 Inter-TSF user data integrity transfer protection (FDP\_UIT)

### Family behaviour

This family defines the requirements for providing integrity for user data in transit between the TSF and another trusted IT product and recovering from detectable errors. At a minimum, this family monitors the integrity of user data for modifications. Furthermore, this family supports different ways of correcting detected integrity errors.

### Component levelling

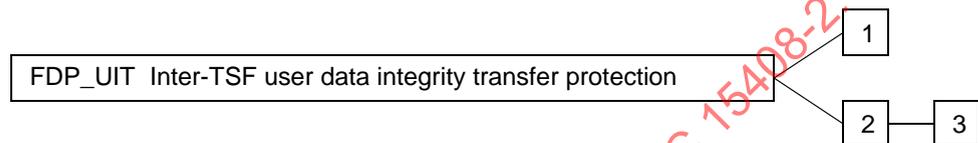

FDP\_UIT.1 Data exchange integrity addresses detection of modifications, deletions, insertions, and replay errors of the user data transmitted.

FDP\_UIT.2 Source data exchange recovery addresses recovery of the original user data by the receiving TSF with help from the source trusted IT product.

FDP\_UIT.3 Destination data exchange recovery addresses recovery of the original user data by the receiving TSF on its own without any help from the source trusted IT product.

Management: FDP\_UIT.1, FDP\_UIT.2, FDP\_UIT.3

There are no management activities foreseen for this component.

Audit: FDP\_UIT.1

The following events should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST.

- a) Minimal: The identity of any user or subject using the data exchange mechanisms.
- b) Basic: The identity of any user or subject attempting to use the user data exchange mechanisms, but who is unauthorised to do so.
- c) Basic: A reference to the names or other indexing information useful in identifying the user data that was transmitted or received. This could include security attributes associated with the user data.
- d) Basic: Any identified attempts to block transmission of user data.
- e) Detailed: The types and/or effects of any detected modifications of transmitted user data.

Audit: FDP\_UIT.2, FDP\_UIT.3

The following events should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST.

- a) Minimal: The identity of any user or subject using the data exchange mechanisms.
- b) Minimal: Successful recovery from errors including the type of error that was detected.
- c) Basic: The identity of any user or subject attempting to use the user data exchange mechanisms, but who is unauthorised to do so.
- d) Basic: A reference to the names or other indexing information useful in identifying the user data that was transmitted or received. This could include security attributes associated with the user data.
- e) Basic: Any identified attempts to block transmission of user data.
- f) Detailed: The types and/or effects of any detected modifications of transmitted user data.

### **FDP\_UIT.1 Data exchange integrity**

Hierarchical to: No other components.

**FDP\_UIT.1.1** The TSF shall enforce the [assignment: *access control SFP(s) and/or information flow control SFP(s)*] to be able to [selection: *transmit, receive*] user data in a manner protected from [selection: *modification, deletion, insertion, replay*] errors.

**FDP\_UIT.1.2** The TSF shall be able to determine on receipt of user data, whether [selection: *modification, deletion, insertion, replay*] has occurred.

Dependencies: [FDP\_ACC.1 Subset access control, or  
FDP\_IFC.1 Subset information flow control]  
[FTP\_ITC.1 Inter-TSF trusted channel, or  
FTP\_TRP.1 Trusted path]

### **FDP\_UIT.2 Source data exchange recovery**

Hierarchical to: No other components.

**FDP\_UIT.2.1** The TSF shall enforce the [assignment: *access control SFP(s) and/or information flow control SFP(s)*] to be able to recover from [assignment: *list of recoverable errors*] with the help of the source trusted IT product.

Dependencies: [FDP\_ACC.1 Subset access control, or  
FDP\_IFC.1 Subset information flow control]  
FDP\_UIT.1 Data exchange integrity  
FTP\_ITC.1 Inter-TSF trusted channel

### FDP\_UIT.3 Destination data exchange recovery

Hierarchical to: FDP\_UIT.2

**FDP\_UIT.3.1** The TSF shall enforce the [assignment: *access control SFP(s) and/or information flow control SFP(s)*] to be able to recover from [assignment: *list of recoverable errors*] **without any help from the source trusted IT product.**

Dependencies: [FDP\_ACC.1 Subset access control, or  
FDP\_IFC.1 Subset information flow control]  
FDP\_UIT.1 Data exchange integrity  
FTP\_ITC.1 Inter-TSF trusted channel

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## 7 Class FIA: Identification and authentication

Families in this class address the requirements for functions to establish and verify a claimed user identity.

Identification and Authentication is required to ensure that users are associated with the proper security attributes (e.g. identity, groups, roles, security or integrity levels).

The unambiguous identification of authorised users and the correct association of security attributes with users and subjects is critical to the enforcement of the intended security policies. The families in this class deal with determining and verifying the identity of users, determining their authority to interact with the TOE, and with the correct association of security attributes for each authorised user. Other classes of requirements (e.g. User Data Protection, Security Audit) are dependent upon correct identification and authentication of users in order to be effective.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

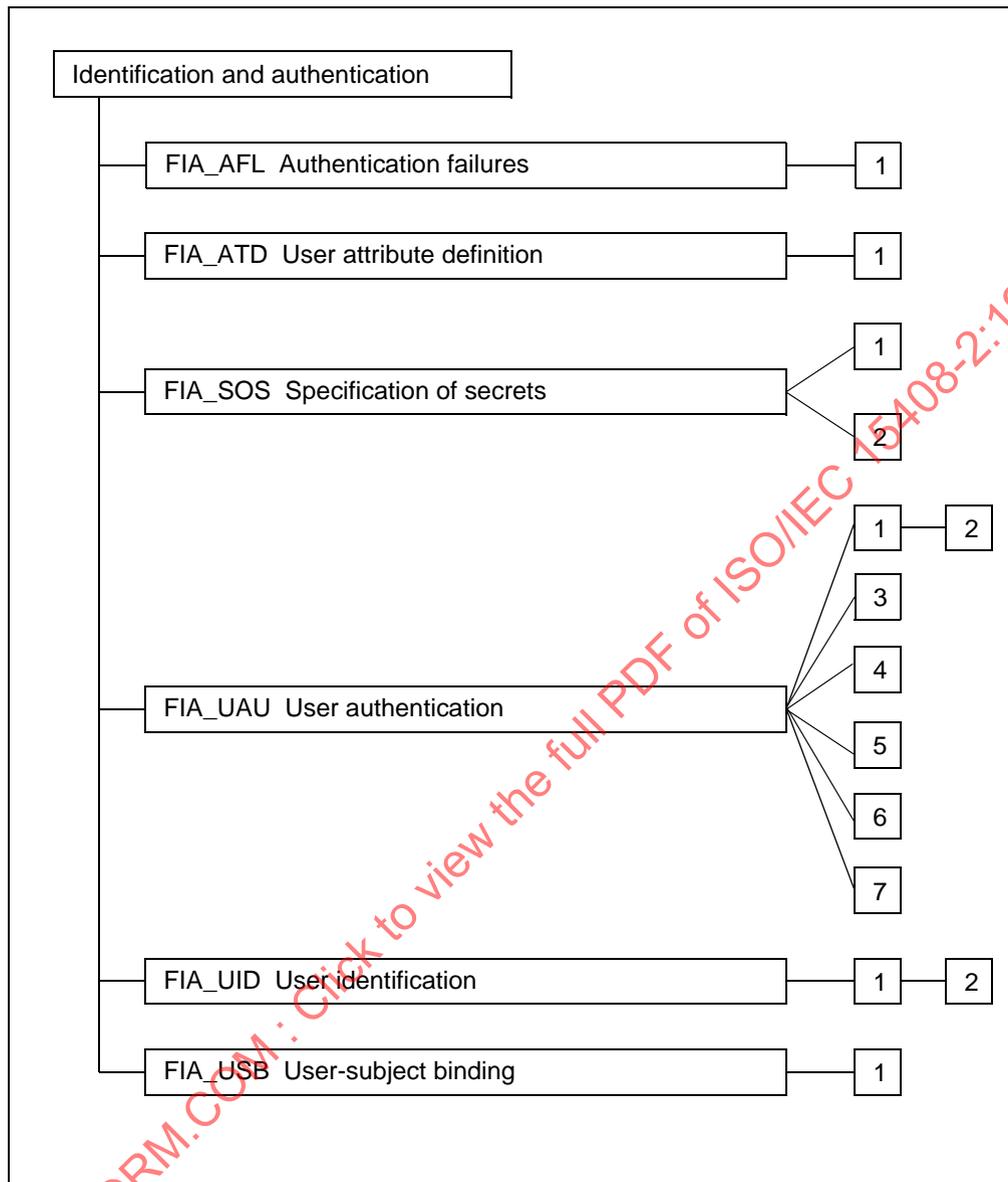



Figure 7.1 - Identification and authentication class decomposition

## 7.1 Authentication failures (FIA\_AFL)

### Family behaviour

This family contains requirements for defining values for some number of unsuccessful authentication attempts and TSF actions in cases of authentication attempt failures. Parameters include, but are not limited to, the number of failed authentication attempts and time thresholds.

### Component levelling



FIA\_AFL.1 requires that the TSF be able to terminate the session establishment process after a specified number of unsuccessful user authentication attempts. It also requires that, after termination of the session establishment process, the TSF be able to disable the user account or the point of entry (e.g. workstation) from which the attempts were made until an administrator-defined condition occurs.

### Management: FIA\_AFL.1

The following actions could be considered for the management functions in FMT:

- a) management of the threshold for unsuccessful authentication attempts;
- b) management of actions to be taken in the event of an authentication failure.

### Audit: FIA\_AFL.1

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: the reaching of the threshold for the unsuccessful authentication attempts and the actions (e.g. disabling of a terminal) taken and the subsequent, if appropriate, restoration to the normal state (e.g. re-enabling of a terminal).

### FIA\_AFL.1 Authentication failure handling

Hierarchical to: No other components.

**FIA\_AFL.1.1** The TSF shall detect when [assignment: *number*] unsuccessful authentication attempts occur related to [assignment: *list of authentication events*].

**FIA\_AFL.1.2** When the defined number of unsuccessful authentication attempts has been met or surpassed, the TSF shall [assignment: *list of actions*].

Dependencies: FIA\_UAU.1 Timing of authentication

## 7.2 User attribute definition (FIA\_ATD)

### Family behaviour

All authorised users may have a set of security attributes, other than the user's identity, that is used to enforce the TSP. This family defines the requirements for associating user security attributes with users as needed to support the TSP.

### Component levelling



FIA\_ATD.1 User attribute definition, allows user security attributes for each user to be maintained individually.

Management: FIA\_ATD.1

The following actions could be considered for the management functions in FMT:

- a) if so indicated in the assignment, the authorised administrator might be able to define additional security attributes for users.

Audit: FIA\_ATD.1

There are no actions identified that should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST.

### FIA\_ATD.1 User attribute definition

Hierarchical to: No other components.

FIA\_ATD.1.1 **The TSP shall maintain the following list of security attributes belonging to individual users: [assignment: *list of security attributes*].**


Dependencies: No dependencies.

### 7.3 Specification of secrets (FIA\_SOS)

#### Family behaviour

This family defines requirements for mechanisms that enforce defined quality metrics on provided secrets and generate secrets to satisfy the defined metric.

#### Component levelling

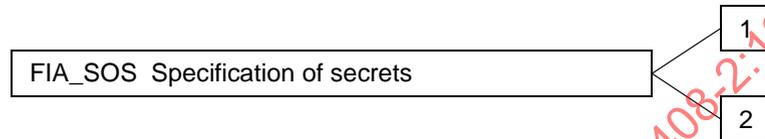

FIA\_SOS.1 Verification of secrets requires the TSF to verify that secrets meet defined quality metrics.

FIA\_SOS.2 TSF Generation of secrets requires the TSF to be able to generate secrets that meet defined quality metrics.

#### Management: FIA\_SOS.1

The following actions could be considered for the management functions in FMT:

- a) the management of the metric used to verify the secrets.

#### Management: FIA\_SOS.2

The following actions could be considered for the management functions in FMT:

- a) the management of the metric used to generate the secrets.

#### Audit: FIA\_SOS.1, FIA\_SOS.2

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: Rejection by the TSF of any tested secret;
- b) Basic: Rejection or acceptance by the TSF of any tested secret;
- c) Detailed: Identification of any changes to the defined quality metrics.

**FIA\_SOS.1 Verification of secrets**

Hierarchical to: No other components.

**FIA\_SOS.1.1** The TSF shall provide a mechanism to verify that secrets meet [assignment: *a defined quality metric*].

Dependencies: No dependencies.

**FIA\_SOS.2 TSF Generation of secrets**

Hierarchical to: No other components.

**FIA\_SOS.2.1** The TSF shall provide a mechanism to generate secrets that meet [assignment: *a defined quality metric*].

**FIA\_SOS.2.2** The TSF shall be able to enforce the use of TSF generated secrets for [assignment: *list of TSF functions*].

Dependencies: No dependencies.


IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## 7.4 User authentication (FIA\_UAU)

### Family behaviour

This family defines the types of user authentication mechanisms supported by the TSF. This family also defines the required attributes on which the user authentication mechanisms must be based.

### Component levelling

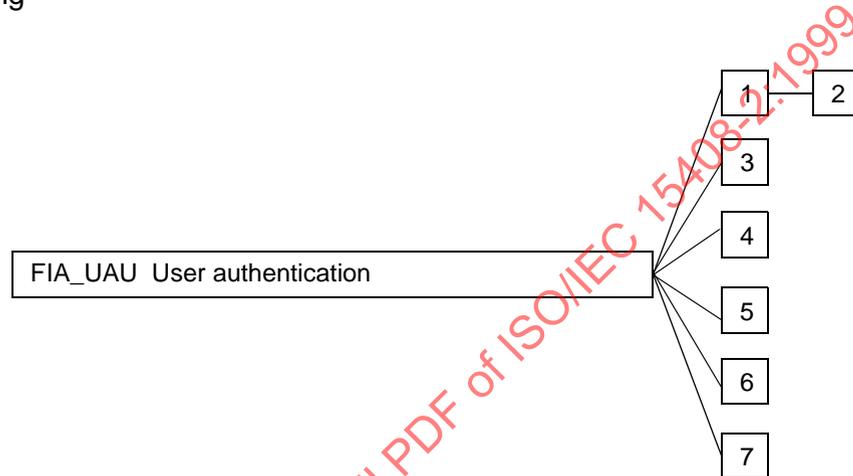

FIA\_UAU.1 Timing of authentication, allows a user to perform certain actions prior to the authentication of the user's identity.

FIA\_UAU.2 User authentication before any action, requires that users authenticate themselves before any action will be allowed by the TSF.

FIA\_UAU.3 Unforgeable authentication, requires the authentication mechanism to be able to detect and prevent the use of authentication data that has been forged or copied.

FIA\_UAU.4 Single-use authentication mechanisms, requires an authentication mechanism that operates with single-use authentication data.

FIA\_UAU.5 Multiple authentication mechanisms, requires that different authentication mechanisms be provided and used to authenticate user identities for specific events.

FIA\_UAU.6 Re-authenticating, requires the ability to specify events for which the user needs to be re-authenticated.

FIA\_UAU.7 Protected authentication feedback, require that only limited feedback information is provided to the user during the authentication.

Management: FIA\_UAU.1

The following actions could be considered for the management functions in FMT:

- a) management of the authentication data by an administrator;

- b) management of the authentication data by the associated user;
- c) managing the list of actions that can be taken before the user is authenticated.

Management: FIA\_UAU.2

The following actions could be considered for the management functions in FMT:

- a) management of the authentication data by an administrator;
- b) management of the authentication data by the user associated with this data.

Management: FIA\_UAU.3, FIA\_UAU.4, FIA\_UAU.7

There are no management activities foreseen.

Management: FIA\_UAU.5

The following actions could be considered for the management functions in FMT:

- a) the management of authentication mechanisms;
- b) the management of the rules for authentication.

Management: FIA\_UAU.6

The following actions could be considered for the management functions in FMT:

- a) if an authorised administrator could request re-authentication, the management includes a re-authentication request.

Audit: FIA\_UAU.1

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: Unsuccessful use of the authentication mechanism;
- b) Basic: All use of the authentication mechanism;
- c) Detailed: All TSF mediated actions performed before authentication of the user.

Audit: FIA\_UAU.2

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: Unsuccessful use of the authentication mechanism;
- b) Basic: All use of the authentication mechanism.

Audit: FIA\_UAU.3

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: Detection of fraudulent authentication data;
- b) Basic: All immediate measures taken and results of checks on the fraudulent data.

Audit: FIA\_UAU.4

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: Attempts to reuse authentication data.

Audit: FIA\_UAU.5

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: The final decision on authentication;
- b) Basic: The result of each activated mechanism together with the final decision.

Audit: FIA\_UAU.6

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: Failure of reauthentication;
- b) Basic: All reauthentication attempts.

Audit: FIA\_UAU.7

There are no auditable events foreseen.

#### **FIA\_UAU.1 Timing of authentication**

Hierarchical to: No other components.

**FIA\_UAU.1.1 The TSF shall allow [assignment: *list of TSF mediated actions*] on behalf of the user to be performed before the user is authenticated.**

**FIA\_UAU.1.2 The TSF shall require each user to be successfully authenticated before allowing any other TSF-mediated actions on behalf of that user.**

Dependencies: **FIA\_UID.1 Timing of identification**

**FIA\_UAU.2 User authentication before any action**

Hierarchical to: FIA\_UAU.1

**FIA\_UAU.2.1** The TSF shall require each user to be successfully authenticated before allowing **any other TSF-mediated actions** on behalf of that user.

Dependencies: FIA\_UID.1 Timing of identification

**FIA\_UAU.3 Unforgeable authentication**

Hierarchical to: No other components.

**FIA\_UAU.3.1** The TSF shall [selection: *detect, prevent*] use of authentication data that has been forged by any user of the TSF.

**FIA\_UAU.3.2** The TSF shall [selection: *detect, prevent*] use of authentication data that has been copied from any other user of the TSF.

Dependencies: No dependencies.

**FIA\_UAU.4 Single-use authentication mechanisms**

Hierarchical to: No other components.

**FIA\_UAU.4.1** The TSF shall prevent reuse of authentication data related to [assignment: *identified authentication mechanism(s)*].

Dependencies: No dependencies.

**FIA\_UAU.5 Multiple authentication mechanisms**

Hierarchical to: No other components.

**FIA\_UAU.5.1** The TSF shall provide [assignment: *list of multiple authentication mechanisms*] to support user authentication.

**FIA\_UAU.5.2** The TSF shall authenticate any user's claimed identity according to the [assignment: *rules describing how the multiple authentication mechanisms provide authentication*].

Dependencies: No dependencies.

**FIA\_UAU.6 Re-authenticating**

Hierarchical to: No other components.

**FIA\_UAU.6.1** The TSF shall re-authenticate the user under the conditions [assignment: *list of conditions under which re-authentication is required*].

Dependencies: No dependencies.

**FIA\_UAU.7 Protected authentication feedback**

Hierarchical to: No other components.

**FIA\_UAU.7.1** The TSF shall provide only [assignment: *list of feedback*] to the user while the authentication is in progress.

Dependencies: **FIA\_UAU.1** Timing of authentication

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## 7.5 User identification (FIA\_UID)

### Family behaviour

This family defines the conditions under which users shall be required to identify themselves before performing any other actions that are to be mediated by the TSF and which require user identification.

### Component levelling



FIA\_UID.1 Timing of identification, allows users to perform certain actions before being identified by the TSF.

FIA\_UID.2 User identification before any action, require that users identify themselves before any action will be allowed by the TSF.

#### Management: FIA\_UID.1

The following actions could be considered for the management functions in FMT:

- a) the management of the user identities;
- b) if an authorised administrator can change the actions allowed before identification, the managing of the action lists.

#### Management: FIA\_UID.2

The following actions could be considered for the management functions in FMT:

- a) the management of the user identities.

#### Audit: FIA\_UID.1, FIA\_UID.2

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: Unsuccessful use of the user identification mechanism, including the user identity provided;
- b) Basic: All use of the user identification mechanism, including the user identity provided.

**FIA\_UID.1 Timing of identification**

Hierarchical to: No other components.

**FIA\_UID.1.1** The TSF shall allow [assignment: *list of TSF-mediated actions*] on behalf of the user to be performed before the user is identified.

**FIA\_UID.1.2** The TSF shall require each user to be successfully identified before allowing any other TSF-mediated actions on behalf of that user.

Dependencies: No dependencies.

**FIA\_UID.2 User identification before any action**

Hierarchical to: FIA\_UID.1

**FIA\_UID.2.1** The TSF shall require each user to identify itself before allowing any other TSF-mediated actions on behalf of that user.

Dependencies: No dependencies.


IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## 7.6 User-subject binding (FIA\_USB)

### Family behaviour

An authenticated user, in order to use the TOE, typically activates a subject. The user's security attributes are associated (totally or partially) with this subject. This family defines requirements to create and maintain the association of the user's security attributes to a subject acting on the user's behalf.

### Component levelling



FIA\_USB.1 User-subject binding requires the maintenance of an association between the user's security attributes and a subject acting on the user's behalf.

Management: FIA\_USB.1

The following actions could be considered for the management functions in FMT:

- a) an authorised administrator can define default subject security attributes.

Audit: FIA\_USB.1

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: Unsuccessful binding of user security attributes to a subject (e.g. creation of a subject).
- b) Basic: Success and failure of binding of user security attributes to a subject (e.g. success and failure to create a subject).

### FIA\_USB.1 User-subject binding

Hierarchical to: No other components.

**FIA\_USB.1.1 The TSF shall associate the appropriate user security attributes with subjects acting on behalf of that user.**

Dependencies: FIA\_ATD.1 User attribute definition

## 8 Class FMT: Security management

This class is intended to specify the management of several aspects of the TSF: security attributes, TSF data and functions. The different management roles and their interaction, such as separation of capability, can be specified.

This class has several objectives:

- a) management of TSF data, which include, for example, banners;
- b) management of security attributes, which include, for example, the Access Control Lists, and Capability Lists;
- c) management of functions of the TSF, which includes, for example, the selection of functions, and rules or conditions influencing the behaviour of the TSF;
- d) definition of security roles.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

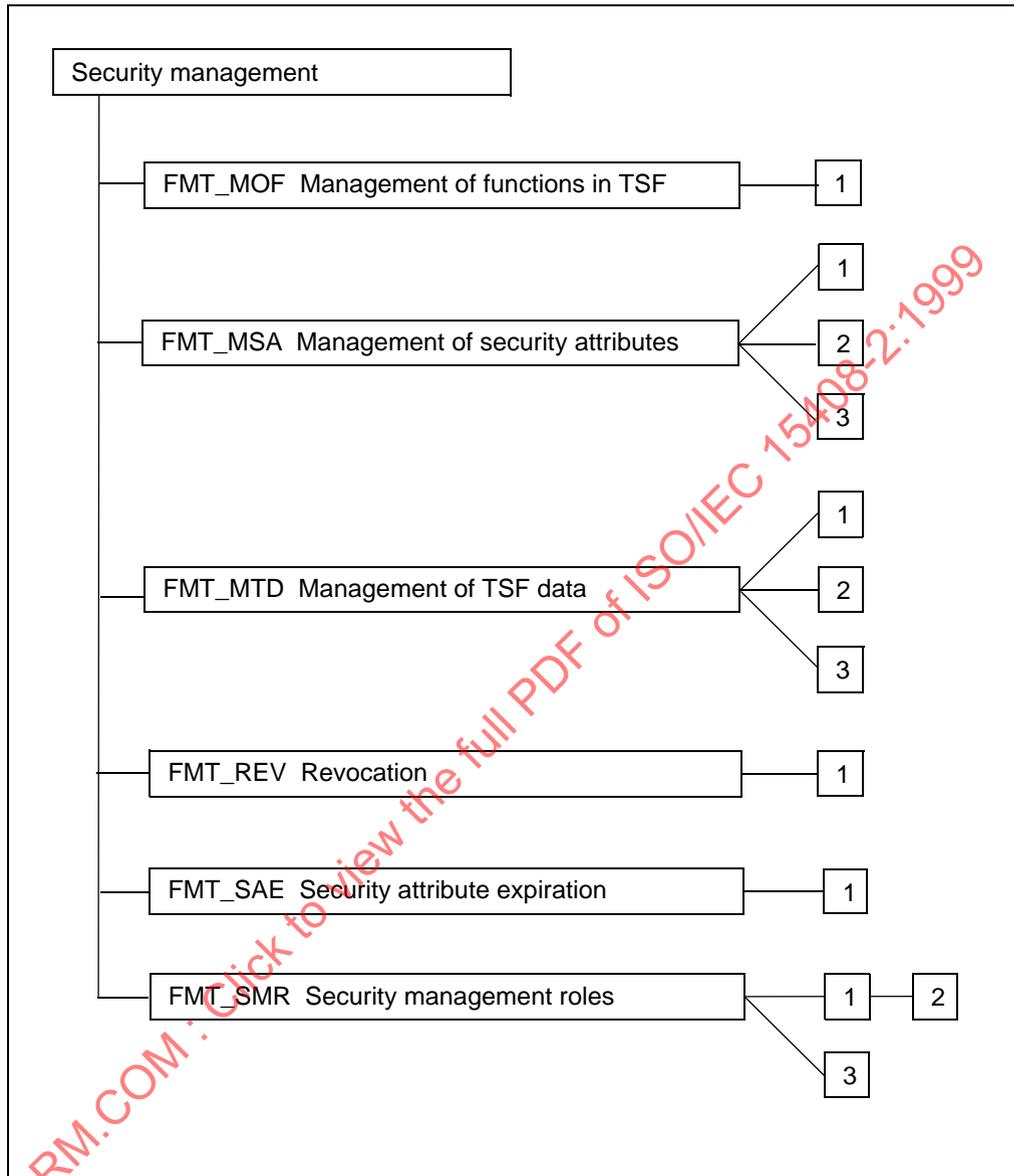



Figure 8.1 - Security management class decomposition

## 8.1 Management of functions in TSF (FMT\_MOF)

### Family behaviour

This family allows authorised users control over the management of functions in the TSF. Examples of functions in the TSF include the audit functions and the multiple authentication functions.

### Component levelling



FMT\_MOF.1 Management of security functions behaviour allows the authorised users (roles) to manage the behaviour of functions in the TSF that use rules or have specified conditions that may be manageable.

Management: FMT\_MOF.1

The following actions could be considered for the management functions in FMT Management:

- a) managing the group of roles that can interact with the functions in the TSF;

Audit: FMT\_MOF.1

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP / ST:

- a) Basic: All modifications in the behaviour of the functions in the TSF.

### FMT\_MOF.1 Management of security functions behaviour

Hierarchical to: No other components.

**FMT\_MOF.1** The TSF shall restrict the ability to [selection: *determine the behaviour of, disable, enable, modify the behaviour of*] the functions [assignment: *list of functions*] to [assignment: *the authorised identified roles*].


Dependencies: FMT\_SMR.1 Security roles

## 8.2 Management of security attributes (FMT\_MSA)

### Family behaviour

This family allows authorised users control over the management of security attributes. This management might include capabilities for viewing and modifying of security attributes.

### Component levelling

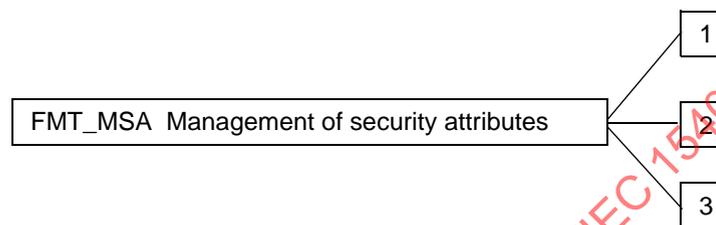

FMT\_MSA.1 Management of security attributes allows authorised users (roles) to manage the specified security attributes.

FMT\_MSA.2 Secure security attributes ensures that values assigned to security attributes are valid with respect to the secure state.

FMT\_MSA.3 Static attribute initialisation ensures that the default values of security attributes are appropriately either permissive or restrictive in nature.

#### Management: FMT\_MSA.1

The following actions could be considered for the management functions in FMT Management:

- a) managing the group of roles that can interact with the security attributes.

#### Management: FMT\_MSA.2

There are no additional management activities foreseen for this component.

#### Management: FMT\_MSA.3

The following actions could be considered for the management functions in FMT Management:

- a) managing the group of roles that can specify initial values;
- b) managing the permissive or restrictive setting of default values for a given access control SFP.

#### Audit: FMT\_MSA.1

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP / ST:

- a) Basic: All modifications of the values of security attributes.

Audit: FMT\_MSA.2

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP / ST:

- a) Minimal: All offered and rejected values for a security attribute;
- b) Detailed: All offered and accepted secure values for a security attribute.

Audit: FMT\_MSA.3

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP / ST:

- a) Basic: Modifications of the default setting of permissive or restrictive rules.
- b) Basic: All modifications of the initial values of security attributes.

### **FMT\_MSA.1 Management of security attributes**

Hierarchical to: No other components.

**FMT\_MSA.1.1** The TSF shall enforce the [assignment: *access control SFP, information flow control SFP*] to restrict the ability to [selection: *change\_default, query, modify, delete, [assignment: other operations]*] the security attributes [assignment: *list of security attributes*] to [assignment: *the authorised identified roles*].

Dependencies: [FDP\_ACC.1 Subset access control or  
FDP\_IFC.1 Subset information flow control]  
FMT\_SMR.1 Security roles

### **FMT\_MSA.2 Secure security attributes**

Hierarchical to: No other components.

**FMT\_MSA.2.1** The TSF shall ensure that only secure values are accepted for security attributes.

Dependencies: ADV\_SPM.1 Informal TOE security policy model  
[FDP\_ACC.1 Subset access control or  
FDP\_IFC.1 Subset information flow control]  
FMT\_MSA.1 Management of security attributes  
FMT\_SMR.1 Security roles

**FMT\_MSA.3 Static attribute initialisation**

Hierarchical to: No other components.

**FMT\_MSA.3.1** The TSF shall enforce the [assignment: *access control SFP, information flow control SFP*] to provide [selection: *restrictive, permissive, other property*] default values for security attributes that are used to enforce the *SFP*.

**FMT\_MSA.3.2** The TSF shall allow the [assignment: *the authorised identified roles*] to specify alternative initial values to override the default values when an object or information is created.

Dependencies: **FMT\_MSA.1** Management of security attributes

**FMT\_SMR.1** Security roles

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

### 8.3 Management of TSF data (FMT\_MTD)

#### Family behaviour

This family allows authorised users (roles) control over the management of TSF data. Examples of TSF data include audit information, clock, system configuration and other TSF configuration parameters.

#### Component levelling



FMT\_MTD.1 Management of TSF data allows authorised users to manage TSF data.

FMT\_MTD.2 Management of limits on TSF data specifies the action to be taken if limits on TSF data are reached or exceeded.

FMT\_MTD.3 Secure TSF data ensures that values assigned to TSF data are valid with respect to the secure state.

#### Management: FMT\_MTD.1

The following actions could be considered for the management functions in FMT Management:

- a) managing the group of roles that can interact with the TSF data.

#### Management: FMT\_MTD.2

The following actions could be considered for the management functions in FMT Management:

- a) managing the group of roles that can interact with the limits on the TSF data.

#### Management: FMT\_MTD.3

There are no additional management activities foreseen for this component.

#### Audit: FMT\_MTD.1

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP / ST:

- a) Basic: All modifications to the values of TSF data.

Audit: FMT\_MTD.2

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP / ST:

- a) Basic: All modifications to the limits on TSF data;
- b) Basic: All modifications in the actions to be taken in case of violation of the limits.

Audit: FMT\_MTD.3

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP / ST:

- a) Minimal: All rejected values of TSF data.

### **FMT\_MTD.1 Management of TSF data**

Hierarchical to: No other components.

**FMT\_MTD.1.1** The TSF shall restrict the ability to [selection: *change\_default, query, modify, delete, clear*, [assignment: *other operations*]] the [assignment: *list of TSF data*] to [assignment: *the authorised identified roles*].

Dependencies: FMT\_SMR.1 Security roles

### **FMT\_MTD.2 Management of limits on TSF data**

Hierarchical to: No other components.

**FMT\_MTD.2.1** The TSF shall restrict the specification of the limits for [assignment: *list of TSF data*] to [assignment: *the authorised identified roles*].

**FMT\_MTD.2.2** The TSF shall take the following actions, if the TSF data are at, or exceed, the indicated limits: [assignment: *actions to be taken*].

Dependencies: FMT\_MTD.1 Management of TSF data  
FMT\_SMR.1 Security roles

### **FMT\_MTD.3 Secure TSF data**

Hierarchical to: No other components.

**FMT\_MTD.3.1** The TSF shall ensure that only secure values are accepted for TSF data.

Dependencies: ADV\_SPM.1 Informal TOE security policy model  
FMT\_MTD.1 Management of TSF data

## 8.4 Revocation (FMT\_REV)

Family behaviour

This family addresses revocation of security attributes for a variety of entities within a TOE.

Component levelling



FMT\_REV.1 Revocation provides for revocation of security attributes to be enforced at some point in time.

Management: FMT\_REV.1

The following actions could be considered for the management functions in FMT Management:

- a) managing the group of roles that can invoke revocation of security attributes;
- b) managing the lists of users, subjects, objects and other resources for which revocation is possible;
- c) managing the revocation rules.

Audit: FMT\_REV.1

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP / ST:

- a) Minimal: Unsuccessful revocation of security attributes;
- b) Basic: All attempts to revoke security attributes.

### FMT\_REV.1 Revocation

Hierarchical to: No other components.

**FMT\_REV.1.1** The TSF shall restrict the ability to revoke security attributes associated with the [selection: *users, subjects, objects, other additional resources*] within the TSC to [assignment: *the authorised identified roles*].

**FMT\_REV.1.2** The TSF shall enforce the rules [assignment: *specification of revocation rules*].


Dependencies: FMT\_SMR.1 Security roles

## 8.5 Security attribute expiration (FMT\_SAE)

Family behaviour

This family addresses the capability to enforce time limits for the validity of security attributes.

Component levelling



FMT\_SAE.1 Time-limited authorisation provides the capability for an authorised user to specify an expiration time on specified security attributes.

Management: FMT\_SAE.1

The following actions could be considered for the management functions in FMT Management:

- a) managing the list of security attributes for which expiration is to be supported;
- b) the actions to be taken if the expiration time has passed.

Audit: FMT\_SAE.1

The following actions should be audited if FAU Security Audit is included in the PP/ST:

- a) Basic: Specification of the expiration time for an attribute;
- b) Basic: Action taken due to attribute expiration.

### FMT\_SAE.1 Time-limited authorisation

Hierarchical to: No other components.

**FMT\_SAE.1.1** The TSF shall restrict the capability to specify an expiration time for [assignment: *list of security attributes for which expiration is to be supported*] to [assignment: *the authorised identified roles*].

**FMT\_SAE.1.2** For each of these security attributes, the TSF shall be able to [assignment: *list of actions to be taken for each security attribute*] after the expiration time for the indicated security attribute has passed.

Dependencies: FMT\_SMR.1 Security roles


FPT\_STM.1 Reliable time stamps

## 8.6 Security management roles (FMT\_SMR)

### Family behaviour

This family is intended to control the assignment of different roles to users. The capabilities of these roles with respect to security management are described in the other families in this class.

### Component levelling

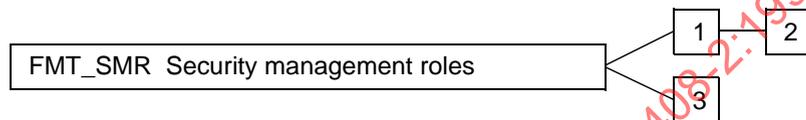

FMT\_SMR.1 Security roles specifies the roles with respect to security that the TSF recognises.

FMT\_SMR.2 Restrictions on security roles specifies that in addition to the specification of the roles, there are rules that control the relationship between the roles.

FMT\_SMR.3 Assuming roles requires that an explicit request is given to the TSF to assume a role.

#### Management: FMT\_SMR.1

The following actions could be considered for the management functions in FMT Management:

- a) managing the group of users that are part of a role.

#### Management: FMT\_SMR.2

The following actions could be considered for the management functions in FMT Management:

- a) managing the group of users that are part of a role;
- b) managing the conditions that the roles must satisfy.

#### Management: FMT\_SMR.3

There are no additional management activities foreseen for this component.

#### Audit: FMT\_SMR.1

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP / ST:

- a) Minimal: modifications to the group of users that are part of a role;
- b) Detailed: every use of the rights of a role.

Audit: FMT\_SMR.2

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP / ST:

- a) Minimal: modifications to the group of users that are part of a role;
- b) Minimal: unsuccessful attempts to use a role due to the given conditions on the roles;
- c) Detailed: every use of the rights of a role.

Audit: FMT\_SMR.3

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP / ST:

- a) Minimal: explicit request to assume a role.

### **FMT\_SMR.1 Security roles**

Hierarchical to: No other components.

**FMT\_SMR.1.1** The TSF shall maintain the roles [assignment: *the authorised identified roles*].

**FMT\_SMR.1.2** The TSF shall be able to associate users with roles.

Dependencies: FIA\_UID.1 Timing of identification

### **FMT\_SMR.2 Restrictions on security roles**

Hierarchical to: FMT\_SMR.1

**FMT\_SMR.2.1** The TSF shall maintain the roles: [assignment: *the authorised identified roles*].

**FMT\_SMR.2.2** The TSF shall be able to associate users with roles.

**FMT\_SMR.2.3** The TSF shall ensure that the conditions [assignment: *conditions for the different roles*] are satisfied.

Dependencies: FIA\_UID.1 Timing of identification

### **FMT\_SMR.3 Assuming roles**

Hierarchical to: No other components.

**FMT\_SMR.3.1** The TSF shall require an explicit request to assume the following roles: [assignment: *the roles*].

Dependencies: **FMT\_SMR.1 Security roles**

[IECNORM.COM](http://IECNORM.COM) : Click to view the full PDF of ISO/IEC 15408-2:1999

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## 9 Class FPR: Privacy

This class contains privacy requirements. These requirements provide a user protection against discovery and misuse of identity by other users.

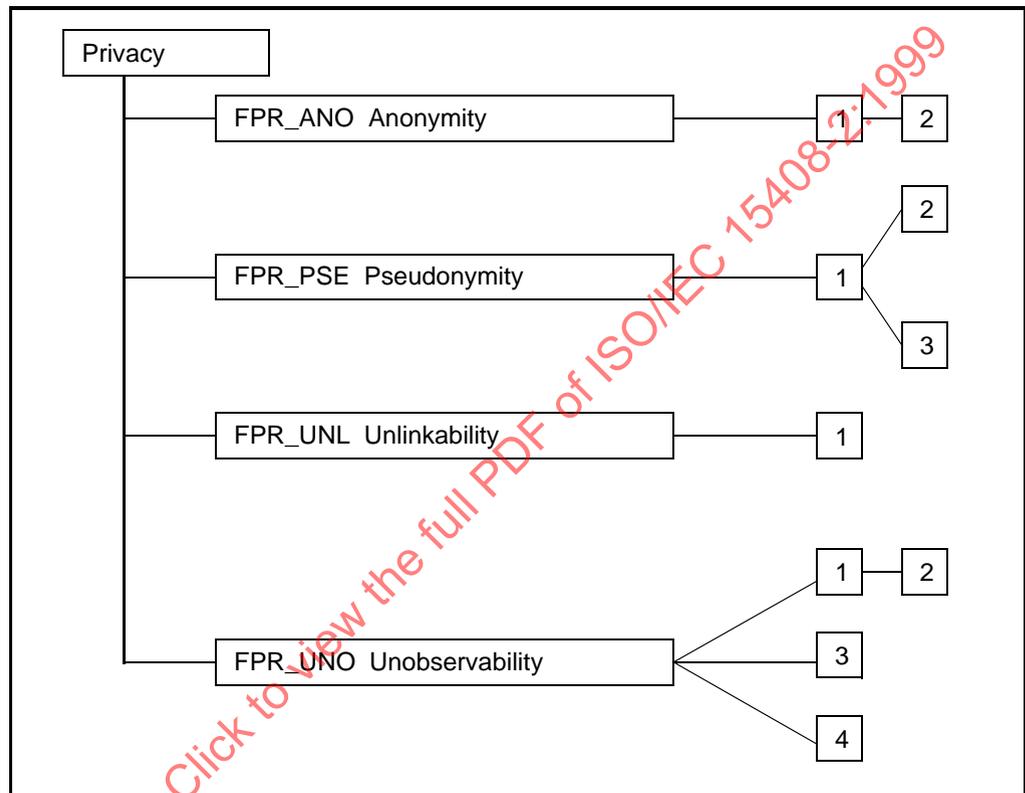


Figure 9.1 - Privacy class decomposition

## 9.1 Anonymity (FPR\_ANO)

### Family behaviour

This family ensures that a user may use a resource or service without disclosing the user's identity. The requirements for Anonymity provide protection of the user identity. Anonymity is not intended to protect the subject identity.

### Component levelling



FPR\_ANO.1 Anonymity requires that other users or subjects are unable to determine the identity of a user bound to a subject or operation.

FPR\_ANO.2 Anonymity without soliciting information enhances the requirements of FPR\_ANO.1 by ensuring that the TSF does not ask for the user identity.

Management: FPR\_ANO.1, FPR\_ANO.2

There are no management activities foreseen for these components.

Audit: FPR\_ANO.1, FPR\_ANO.2

The following actions shall be auditable if FAU\_GEN Security audit data generation is included in the PP / ST:

- a) Minimal: The invocation of the anonymity mechanism.

### FPR\_ANO.1 Anonymity

Hierarchical to: No other components.

**FPR\_ANO.1.1** The TSF shall ensure that [assignment: *set of users and/or subjects*] are unable to determine the real user name bound to [assignment: *list of subjects and/or operations and/or objects*].

Dependencies: No dependencies.

**FPR\_ANO.2 Anonymity without soliciting information**

Hierarchical to: FPR\_ANO.1

**FPR\_ANO.2.1** The TSF shall ensure that [assignment: *set of users and/or subjects*] are unable to determine the real user name bound to [assignment: *list of subjects and/or operations and/or objects*].

**FPR\_ANO.2.2** **The TSF shall provide [assignment: *list of services*] to [assignment: *list of subjects*] without soliciting any reference to the real user name.**

Dependencies: No dependencies.


IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## 9.2 Pseudonymity (FPR\_PSE)

### Family behaviour

This family ensures that a user may use a resource or service without disclosing its user identity, but can still be accountable for that use.

### Component levelling

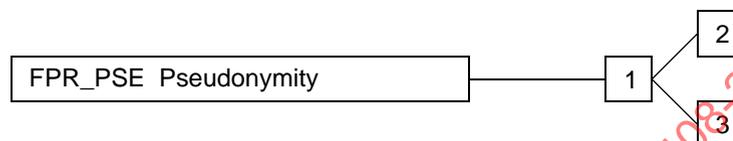

FPR\_PSE.1 Pseudonymity requires that a set of users and/or subjects are unable to determine the identity of a user bound to a subject or operation, but that this user is still accountable for its actions.

FPR\_PSE.2 Reversible pseudonymity requires the TSF to provide a capability to determine the original user identity based on a provided alias.

FPR\_PSE.3 Alias pseudonymity requires the TSF to follow certain construction rules for the alias to the user identity.

Management: FPR\_PSE.1, FPR\_PSE.2, FPR\_PSE.3

There are no management activities foreseen for these components.

Audit: FPR\_PSE.1, FPR\_PSE.2, FPR\_PSE.3

The following actions shall be auditable if FAU\_GEN Security audit data generation is included in the PP / ST:

- a) Minimal: The subject/user that requested resolution of the user identity should be audited.

### FPR\_PSE.1 Pseudonymity

Hierarchical to: No other components.

**FPR\_PSE.1.1** The TSF shall ensure that [assignment: *set of users and/or subjects*] are unable to determine the real user name bound to [assignment: *list of subjects and/or operations and/or objects*].

**FPR\_PSE.1.2** The TSF shall be able to provide [assignment: *number of aliases*] aliases of the real user name to [assignment: *list of subjects*].

**FPR\_PSE.1.3** The TSF shall [selection: *determine an alias for a user, accept the alias from the user*] and verify that it conforms to the [assignment: *alias metric*].

Dependencies: No dependencies.

## **FPR\_PSE.2 Reversible pseudonymity**

Hierarchical to: FPR\_PSE.1

- FPR\_PSE.2.1** The TSF shall ensure that [assignment: *set of users and/or subjects*] are unable to determine the real user name bound to [assignment: *list of subjects and/or operations and/or objects*].
- FPR\_PSE.2.2** The TSF shall be able to provide [assignment: *number of aliases*] aliases of the real user name to [assignment: *list of subjects*].
- FPR\_PSE.2.3** The TSF shall [selection: *determine an alias for a user, accept the alias from the user*] and verify that it conforms to the [assignment: *alias metric*].
- FPR\_PSE.2.4** **The TSF shall provide [selection: *an authorised user*, [assignment: *list of trusted subjects*]] a capability to determine the user identity based on the provided alias only under the following [assignment: *list of conditions*].**

Dependencies: **FIA\_UID.1 Timing of identification**

## **FPR\_PSE.3 Alias pseudonymity**

Hierarchical to: FPR\_PSE.1

- FPR\_PSE.3.1** The TSF shall ensure that [assignment: *set of users and/or subjects*] are unable to determine the real user name bound to [assignment: *list of subjects and/or operations and/or objects*].
- FPR\_PSE.3.2** The TSF shall be able to provide [assignment: *number of aliases*] aliases of the real user name to [assignment: *list of subjects*].
- FPR\_PSE.3.3** The TSF shall [selection: *determine an alias for a user, accept the alias from the user*] and verify that it conforms to the [assignment: *alias metric*].
- FPR\_PSE.3.4** **The TSF shall provide an alias to the real user name which shall be identical to an alias provided previously under the following [assignment: *list of conditions*] otherwise the alias provided shall be unrelated to previously provided aliases.**

Dependencies: No dependencies.

### 9.3 Unlinkability (FPR\_UNL)

Family behaviour

This family ensures that a user may make multiple uses of resources or services without others being able to link these uses together.

Component levelling



FPR\_UNL.1 Unlinkability requires that users and/or subjects are unable to determine whether the same user caused certain specific operations in the system.

Management: FPR\_UNL.1

The following actions could be considered for the management functions in FMT:

- a) the management of the unlinkability function.

Audit: FPR\_UNL.1

The following actions shall be auditable if FAU\_GEN Security audit data generation is included in the PP / ST:

- a) Minimal: The invocation of the unlinkability mechanism.

#### FPR\_UNL.1 Unlinkability

Hierarchical to: No other components.

**FPR\_UNL.1.1** The TSF shall ensure that [assignment: *set of users and/or subjects*] are unable to determine whether [assignment: *list of operations*] [selection: *were caused by the same user, are related as follows*] [assignment: *list of relations*].


Dependencies: No dependencies.

## 9.4 Unobservability (FPR\_UNO)

### Family behaviour

This family ensures that a user may use a resource or service without others, especially third parties, being able to observe that the resource or service is being used.

### Component levelling

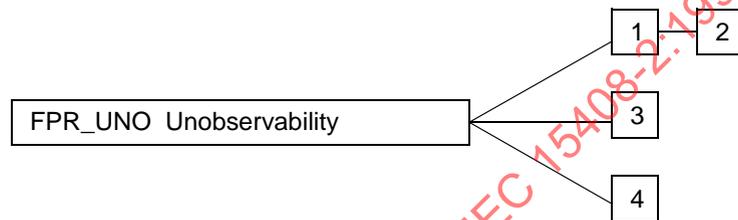

FPR\_UNO.1 Unobservability requires that users and/or subjects cannot determine whether an operation is being performed.

FPR\_UNO.2 Allocation of information impacting unobservability requires that the TSF provide specific mechanisms to avoid the concentration of privacy related information within the TOE. Such concentrations might impact unobservability if a security compromise occurs.

FPR\_UNO.3 Unobservability without soliciting information requires that the TSF does not try to obtain privacy related information that might be used to compromise unobservability.

FPR\_UNO.4 Authorised user observability requires the TSF to provide one or more authorised users with a capability to observe the usage of resources and/or services.

Management: FPR\_UNO.1, FPR\_UNO.2

The following actions could be considered for the management functions in FMT:

- a) the management of the behaviour of the unobservability function.

Management: FPR\_UNO.3

There are no management activities foreseen for these components.

Management: FPR\_UNO.4

The following actions could be considered for the management functions in FMT:

- a) the list of authorised users that are capable of determining the occurrence of operations.

Audit: FPR\_UNO.1, FPR\_UNO.2

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP / ST:

- a) Minimal: The invocation of the unobservability mechanism.

Audit: FPR\_UNO.3

There are no actions identified that should be auditable if FAU\_GEN Security Audit Data Generation is included in the PP/ST.

Audit: FPR\_UNO.4

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP / ST:

- a) Minimal: The observation of the use of a resource or service by a user or subject.

### **FPR\_UNO.1 Unobservability**

Hierarchical to: No other components.

**FPR\_UNO.1.1** The TSF shall ensure that [assignment: *list of users and/or subjects*] are unable to observe the operation [assignment: *list of operations*] on [assignment: *list of objects*] by [assignment: *list of protected users and/or subjects*].

Dependencies: No dependencies.

### **FPR\_UNO.2 Allocation of information impacting unobservability**

Hierarchical to: FPR\_UNO.1

**FPR\_UNO.2.1** The TSF shall ensure that [assignment: *list of users and/or subjects*] are unable to observe the operation [assignment: *list of operations*] on [assignment: *list of objects*] by [assignment: *list of protected users and/or subjects*].

**FPR\_UNO.2.2** The TSF shall allocate the [assignment: *unobservability related information*] among different parts of the TOE such that the following conditions hold during the lifetime of the information: [assignment: *list of conditions*].

Dependencies: No dependencies.

### **FPR\_UNO.3 Unobservability without soliciting information**

Hierarchical to: No other components.

**FPR\_UNO.3.1** The TSF shall provide [assignment: *list of services*] to [assignment: *list of subjects*] without soliciting any reference to [assignment: *privacy related information*].

Dependencies: **FPR\_UNO.1 Unobservability**

**FPR\_UNO.4 Authorised user observability**

Hierarchical to: No other components.

**FPR\_UNO.4.1** The TSF shall provide [assignment: *set of authorised users*] with the capability to observe the usage of [assignment: *list of resources and/or services*].

Dependencies: No dependencies.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## 10 Class FPT: Protection of the TSF

This class contains families of functional requirements that relate to the integrity and management of the mechanisms that provide the TSF (independent of TSP-specifics) and to the integrity of TSF data (independent of the specific contents of the TSP data). In some sense, families in this class may appear to duplicate components in the FDP (User data protection) class; they may even be implemented using the same mechanisms. However, FDP focuses on user data protection, while FPT focuses on TSF data protection. In fact, components from the FPT class are necessary to provide requirements that the SFPs in the TOE cannot be tampered with or bypassed.

From the point of view of this class, there are three significant portions for the TSF:

- a) The TSF's *abstract machine*, which is the virtual or physical machine upon which the specific TSF implementation under evaluation executes.
- b) The TSF's *implementation*, which executes on the abstract machine and implements the mechanisms that enforce the TSP.
- c) The TSF's *data*, which are the administrative databases that guide the enforcement of the TSP.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

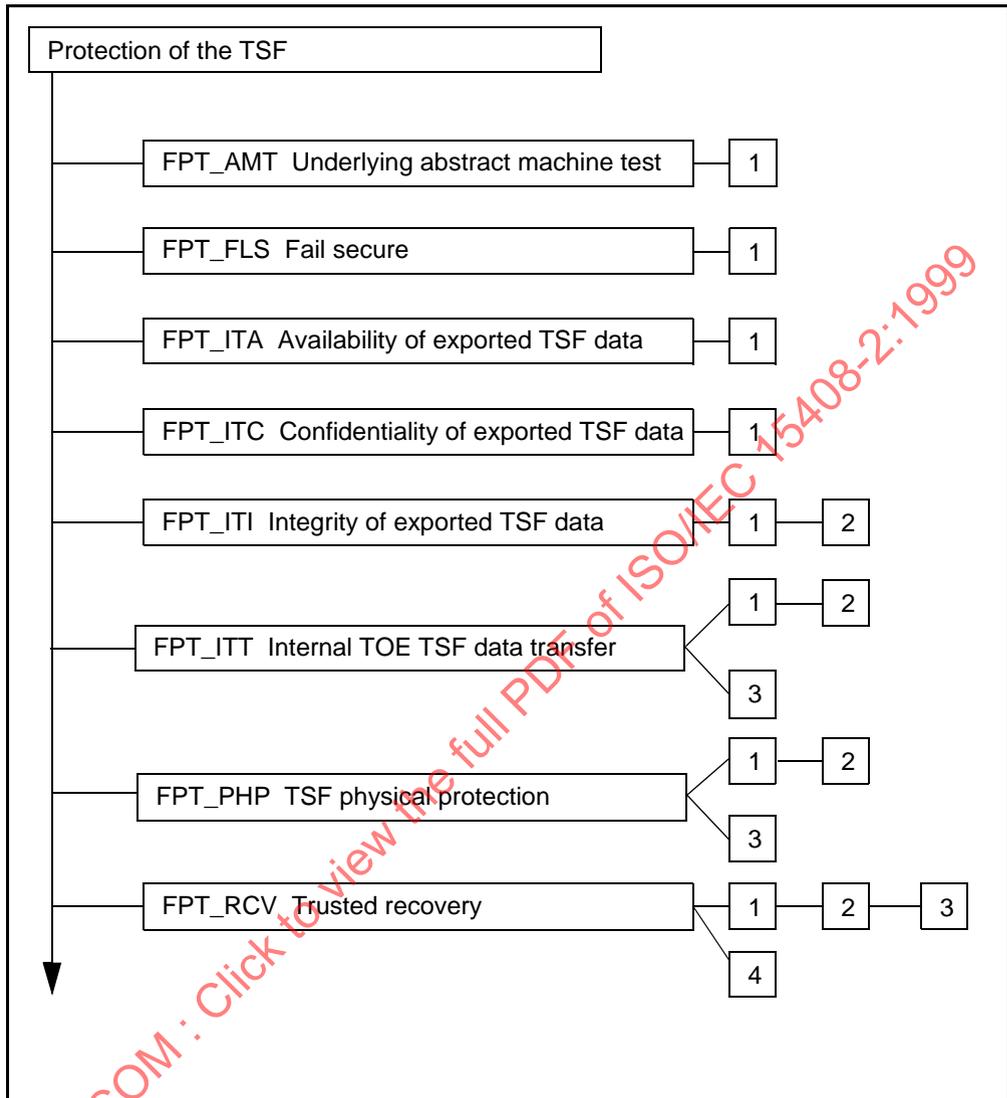


Figure 10.1 - Protection of the TSF class decomposition

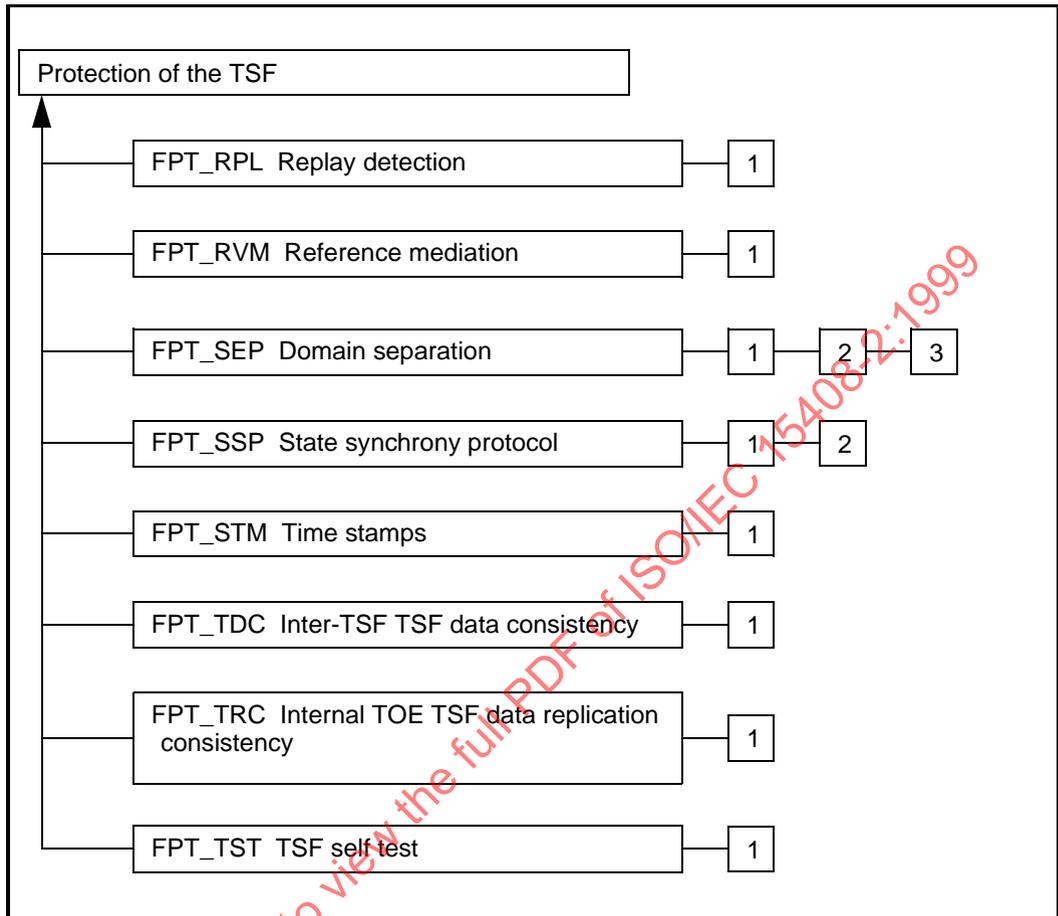


Figure 10.2 - Protection of the TSF class decomposition (Cont.)


IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## 10.1 Underlying abstract machine test (FPT\_AMT)

### Family behaviour

This family defines requirements for the TSF to perform testing to demonstrate the security assumptions made about the underlying abstract machine upon which the TSF relies. This “abstract” machine could be a hardware/firmware platform, or it could be some known and assessed hardware/software combination acting as a virtual machine.

### Component levelling



FPT\_AMT.1 Abstract machine testing, provides for testing of the underlying abstract machine.

Management: FPT\_AMT.1

The following actions could be considered for the management functions in FMT:

- a) management of the conditions under which abstract machine test occurs, such as during initial start-up, regular interval, or under specified conditions;
- b) management of the time interval if appropriate.

Audit: FPT\_AMT.1

The following actions should be audited if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Basic: Execution of the tests of the underlying machine and the results of the tests.

### FPT\_AMT.1 Abstract machine testing

Hierarchical to: No other components.

**FPT\_AMT.1.1 The TSF shall run a suite of tests [selection: *during initial start-up, periodically during normal operation, at the request of an authorised user, other conditions*] to demonstrate the correct operation of the security assumptions provided by the abstract machine that underlies the TSF.**

Dependencies: No dependencies.

## 10.2 Fail secure (FPT\_FLS)

Family behaviour

The requirements of this family ensure that the TOE will not violate its TSP in the event of identified categories of failures in the TSF.

Component levelling



This family consists of only one component, FPT\_FLS.1 Failure with preservation of secure state, which requires that the TSF preserve a secure state in the face of the identified failures.

Management: FPT\_FLS.1

There are no management activities foreseen.

Audit: FPT\_FLS.1

The following actions should be audited if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Basic: Failure of the TSF.

### FPT\_FLS.1 Failure with preservation of secure state

Hierarchical to: No other components.

**FPT\_FLS.1.1 The TSF shall preserve a secure state when the following types of failures occur:** [assignment: *list of types of failures in the TSF*].

Dependencies: **ADV\_SPM.1 Informal TOE security policy model**

### 10.3 Availability of exported TSF data (FPT\_ITA)

#### Family behaviour

This family defines the rules for the prevention of loss of availability of TSF data moving between the TSF and a remote trusted IT product. This data could, for example, be TSF critical data such as passwords, keys, audit data, or TSF executable code.

#### Component levelling



This family consists of only one component, FPT\_ITA.1 Inter-TSF availability within a defined availability metric. This component requires that the TSF ensure, to an identified degree of probability, the availability of TSF data provided to a remote trusted IT product.

Management: FPT\_ITA.1

The following actions could be considered for the management functions in FMT:

- a) management of the list of types of TSF data that must be available to a remote trusted IT product.

Audit: FPT\_ITA.1

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP / ST:

- a) Minimal: the absence of TSF data when required by a TOE.

#### **FPT\_ITA.1 Inter-TSF availability within a defined availability metric**

Hierarchical to: No other components.

**FPT\_ITA.1.1 The TSF shall ensure the availability of [assignment: *list of types of TSF data*] provided to a remote trusted IT product within [assignment: *a defined availability metric*] given the following conditions [assignment: *conditions to ensure availability*].**


Dependencies: No dependencies.

## 10.4 Confidentiality of exported TSF data (FPT\_ITC)

### Family behaviour

This family defines the rules for the protection from unauthorised disclosure of TSF data during transmission between the TSF and a remote trusted IT product. This data could, for example, be TSF critical data such as passwords, keys, audit data, or TSF executable code.

### Component levelling



This family consists of only one component, FPT\_ITC.1 Inter-TSF confidentiality during transmission, which requires that the TSF ensure that data transmitted between the TSF and a remote trusted IT product is protected from disclosure while in transit.

Management: FPT\_ITC.1

There are no management activities foreseen.

Audit: FPT\_ITC.1

There are no actions identified that should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST.

### **FPT\_ITC.1 Inter-TSF confidentiality during transmission**

Hierarchical to: No other components.

**FPT\_ITC.1.1 The TSF shall protect all TSF data transmitted from the TSF to a remote trusted IT product from unauthorised disclosure during transmission.**


Dependencies: No dependencies.

## 10.5 Integrity of exported TSF data (FPT\_ITI)

### Family behaviour

This family defines the rules for the protection, from unauthorised modification, of TSF data during transmission between the TSF and a remote trusted IT product. This data could, for example, be TSF critical data such as passwords, keys, audit data, or TSF executable code.

### Component levelling



FPT\_ITI.1 Inter-TSF detection of modification, provides the ability to detect modification of TSF data during transmission between the TSF and a remote trusted IT product, under the assumption that the remote trusted IT product is cognisant of the mechanism used.

FPT\_ITI.2 Inter-TSF detection and correction of modification, provides the ability for the remote trusted IT product not only to detect modification, but to correct modified TSF data under the assumption that the remote trusted IT product is cognisant of the mechanism used.

### Management: FPT\_ITI.1

There are no management activities foreseen.

### Management: FPT\_ITI.2

The following actions could be considered for the management functions in FMT:

- a) management of the types of TSF data that the TSF should try to correct if modified in transit;
- b) management of the types of action that the TSF could take if TSF data is modified in transit.

### Audit: FPT\_ITI.1

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP / ST:

- a) Minimal: the detection of modification of transmitted TSF data.
- b) Basic: the action taken upon detection of modification of transmitted TSF data.

### Audit: FPT\_ITI.2

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP / ST:

- a) Minimal: the detection of modification of transmitted TSF data;

- b) Basic: the action taken upon detection of modification of transmitted TSF data.
- c) Basic: the use of the correction mechanism.

#### **FPT\_ITI.1 Inter-TSF detection of modification**

Hierarchical to: No other components.

**FPT\_ITI.1.1** The TSF shall provide the capability to detect modification of all TSF data during transmission between the TSF and a remote trusted IT product within the following metric: [assignment: *a defined modification metric*].

**FPT\_ITI.1.2** The TSF shall provide the capability to verify the integrity of all TSF data transmitted between the TSF and a remote trusted IT product and perform [assignment: *action to be taken*] if modifications are detected.

Dependencies: No dependencies.

#### **FPT\_ITI.2 Inter-TSF detection and correction of modification**

Hierarchical to: FPT\_ITI.1

**FPT\_ITI.2.1** The TSF shall provide the capability to detect modification of all TSF data during transmission between the TSF and a remote trusted IT product within the following metric: [assignment: *a defined modification metric*].

**FPT\_ITI.2.2** The TSF shall provide the capability to verify the integrity of all TSF data transmitted between the TSF and a remote trusted IT product and perform [assignment: *action to be taken*] if modifications are detected.

**FPT\_ITI.2.3** The TSF shall provide the capability to correct [assignment: *type of modification*] of all TSF data transmitted between the TSF and a remote trusted IT product.


Dependencies: No dependencies.

## 10.6 Internal TOE TSF data transfer (FPT\_ITT)

### Family behaviour

This family provides requirements that address protection of TSF data when it is transferred between separate parts of a TOE across an internal channel.

### Component levelling

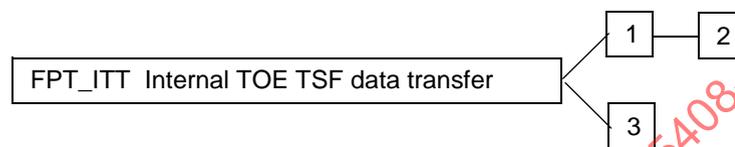

FPT\_ITT.1 Basic internal TSF data transfer protection, requires that TSF data be protected when transmitted between separate parts of the TOE.

FPT\_ITT.2 TSF data transfer separation, requires that the TSF separate user data from TSF data during transmission.

FPT\_ITT.3 TSF data integrity monitoring, requires that the TSF data transmitted between separate parts of the TOE is monitored for identified integrity errors.

#### Management: FPT\_ITT.1

The following actions could be considered for the management functions in FMT:

- a) management of the types of modification against which the TSF should protect;
- b) management of the mechanism used to provide the protection of the data in transit between different parts of the TSF.

#### Management: FPT\_ITT.2

The following actions could be considered for the management functions in FMT:

- a) management of the types of modification against which the TSF should protect;
- b) management of the mechanism used to provide the protection of the data in transit between different parts of the TSF;
- c) management of the separation mechanism.

#### Management: FPT\_ITT.3

The following actions could be considered for the management functions in FMT:

- a) management of the types of modification against which the TSF should protect;

- b) management of the mechanism used to provide the protection of the data in transit between different parts of the TSF;
- c) management of the types of modification of TSF data the TSF should try to detect;
- d) management of the actions that will be taken.

Audit: FPT\_ITT.1, FPT\_ITT.2

There are no actions identified that should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST.

Audit: FPT\_ITT.3

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP / ST:

- a) Minimal: the detection of modification of TSF data;
- b) Basic: the action taken following detection of an integrity error.

#### **FPT\_ITT.1 Basic internal TSF data transfer protection**

Hierarchical to: No other components.

**FPT\_ITT.1.1 The TSF shall protect TSF data from [selection: *disclosure, modification*] when it is transmitted between separate parts of the TOE.**

Dependencies: No dependencies.

#### **FPT\_ITT.2 TSF data transfer separation**

Hierarchical to: FPT\_ITT.1

**FPT\_ITT.2.1 The TSF shall protect TSF data from [selection: *disclosure, modification*] when it is transmitted between separate parts of the TOE.**

**FPT\_ITT.2.2 The TSF shall separate user data from TSF data when such data is transmitted between separate parts of the TOE.**

Dependencies: No dependencies.

**FPT\_ITT.3 TSF data integrity monitoring**

Hierarchical to: No other components.

**FPT\_ITT.3.1** The TSF shall be able to detect [selection: *modification of data, substitution of data, re-ordering of data, deletion of data*, [assignment: *other integrity errors*]] for TSF data transmitted between separate parts of the TOE.

**FPT\_ITT.3.2** Upon detection of a data integrity error, the TSF shall take the following actions: [assignment: *specify the action to be taken*].

Dependencies: **FPT\_ITT.1 Basic internal TSF data transfer protection**

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## 10.7 TSF physical protection (FPT\_PHP)

### Family behaviour

TSF physical protection components refer to restrictions on unauthorised physical access to the TSF, and to the deterrence of, and resistance to, unauthorised physical modification, or substitution of the TSF.

The requirements of components in this family ensure that the TSF is protected from physical tampering and interference. Satisfying the requirements of these components results in the TSF being packaged and used in such a manner that physical tampering is detectable, or resistance to physical tampering is enforced. Without these components, the protection functions of a TSF lose their effectiveness in environments where physical damage cannot be prevented. This family also provides requirements regarding how the TSF shall respond to physical tampering attempts.

### Component levelling



FPT\_PHP.1 Passive detection of physical attack, provides for features that indicate when a TSF device or TSF element is subject to tampering. However, notification of tampering is not automatic; an authorised user must invoke a security administrative function or perform manual inspection to determine if tampering has occurred.

FPT\_PHP.2 Notification of physical attack, provides for automatic notification of tampering for an identified subset of physical penetrations.

FPT\_PHP.3 Resistance to physical attack, provides for features that prevent or resist physical tampering with TSF devices and TSF elements.

Management: FPT\_PHP.1

There are no management activities foreseen.

Management: FPT\_PHP.2

The following actions could be considered for the management functions in FMT:

- a) management of the user or role that gets informed about intrusions;
- b) management of the list of devices that should inform the indicated user or role about the intrusion.

Management: FPT\_PHP.3

The following actions could be considered for the management functions in FMT:

- a) management of the automatic responses to physical tampering.

Audit: FPT\_PHP.1

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP / ST:

- a) Minimal: if detection by IT means, detection of intrusion.

Audit: FPT\_PHP.2,

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP / ST:

- a) Minimal: detection of intrusion.

Audit: FPT\_PHP.3

There are no actions identified that should be auditable if FAU\_GEN Security audit data generation is included in the PP / ST.

### **FPT\_PHP.1 Passive detection of physical attack**

Hierarchical to: No other components.

**FPT\_PHP.1.1 The TSF shall provide unambiguous detection of physical tampering that might compromise the TSF.**

**FPT\_PHP.1.2 The TSF shall provide the capability to determine whether physical tampering with the TSF's devices or TSF's elements has occurred.**

Dependencies: **FMT\_MOF.1 Management of security functions behaviour**

### **FPT\_PHP.2 Notification of physical attack**

Hierarchical to: FPT\_PHP.1

**FPT\_PHP.2.1 The TSF shall provide unambiguous detection of physical tampering that might compromise the TSF.**

**FPT\_PHP.2.2 The TSF shall provide the capability to determine whether physical tampering with the TSF's devices or TSF's elements has occurred.**

**FPT\_PHP.2.3 For [assignment: *list of TSF devices/elements for which active detection is required*], the TSF shall monitor the devices and elements and notify**

**[assignment: a designated user or role] when physical tampering with the TSF's devices or TSF's elements has occurred.**

Dependencies: FMT\_MOF.1 Management of security functions behaviour

### **FPT\_PHP.3 Resistance to physical attack**

Hierarchical to: No other components.

**FPT\_PHP.3.1 The TSF shall resist [assignment: physical tampering scenarios] to the [assignment: list of TSF devices/elements] by responding automatically such that the TSP is not violated.**

Dependencies: No dependencies.


IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## 10.8 Trusted recovery (FPT\_RCV)

### Family behaviour

The requirements of this family ensure that the TSF can determine that the TOE is started up without protection compromise and can recover without protection compromise after discontinuity of operations. This family is important because the start-up state of the TSF determines the protection of subsequent states.

### Component levelling

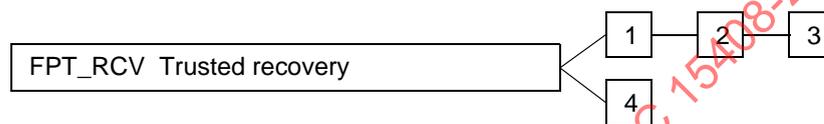

FPT\_RCV.1 Manual recovery, allows a TOE to only provide mechanisms that involve human intervention to return to a secure state.

FPT\_RCV.2 Automated recovery, provides, for at least one type of service discontinuity, recovery to a secure state without human intervention; recovery for other discontinuities may require human intervention.

FPT\_RCV.3 Automated recovery without undue loss, also provides for automated recovery, but strengthens the requirements by disallowing undue loss of protected objects.

FPT\_RCV.4 Function recovery, provides for recovery at the level of particular SFs, ensuring either successful completion or rollback of TSF data to a secure state.

#### Management: FPT\_RCV.1

The following actions could be considered for the management functions in FMT:

- a) management of who can access the restore capability within the maintenance mode.

#### Management: FPT\_RCV.2, FPT\_RCV.3

The following actions could be considered for the management functions in FMT:

- a) management of who can access the restore capability within the maintenance mode;
- b) management of the list of failures/service discontinuities that will be handled through the automatic procedures.

#### Management: FPT\_RCV.4

There are no management activities foreseen.

Audit: FPT\_RCV.1, FPT\_RCV.2, FPT\_RCV.3

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP / ST:

- a) Minimal: the fact that a failure or service discontinuity occurred;
- b) Minimal: resumption of the regular operation;
- c) Basic: type of failure or service discontinuity.

Audit: FPT\_RCV.4

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP / ST:

- a) Minimal: if possible, the impossibility to return to a secure state after failure of a security function;
- b) Basic: if possible, the detection of a failure of a security function.

### **FPT\_RCV.1 Manual recovery**

Hierarchical to: No other components.

**FPT\_RCV.1.1 After a failure or service discontinuity, the TSF shall enter a maintenance mode where the ability to return the TOE to a secure state is provided.**

Dependencies: FPT\_TST.1 TSF testing

AGD\_ADM.1 Administrator guidance

ADV\_SPM.1 Informal TOE security policy model

### **FPT\_RCV.2 Automated recovery**

Hierarchical to: FPT\_RCV.1

**FPT\_RCV.2.1 When automated recovery from a failure or service discontinuity is not possible, the TSF shall enter a maintenance mode where the ability to return the TOE to a secure state is provided.**

**FPT\_RCV.2.2 For [assignment: *list of failures/service discontinuities*], the TSF shall ensure the return of the TOE to a secure state using automated procedures.**

Dependencies: FPT\_TST.1 TSF testing

AGD\_ADM.1 Administrator guidance

ADV\_SPM.1 Informal TOE security policy model

**FPT\_RCV.3 Automated recovery without undue loss**

Hierarchical to: FPT\_RCV.2

- FPT\_RCV.3.1** When automated recovery from a failure or service discontinuity is not possible, the TSF shall enter a maintenance mode where the ability to return the TOE to a secure state is provided.
- FPT\_RCV.3.2** For [assignment: *list of failures/service discontinuities*], the TSF shall ensure the return of the TOE to a secure state using automated procedures.
- FPT\_RCV.3.3** **The functions provided by the TSF to recover from failure or service discontinuity shall ensure that the secure initial state is restored without exceeding [assignment: *quantification*] for loss of TSF data or objects within the TSC.**
- FPT\_RCV.3.4** **The TSF shall provide the capability to determine the objects that were or were not capable of being recovered.**

Dependencies: FPT\_TST.1 TSF testing

AGD\_ADM.1 Administrator guidance

ADV\_SPM.1 Informal TOE security policy model

**FPT\_RCV.4 Function recovery**

Hierarchical to: No other components.

- FPT\_RCV.4.1** **The TSF shall ensure that [assignment: *list of SFs and failure scenarios*] have the property that the SF either completes successfully, or for the indicated failure scenarios, recovers to a consistent and secure state.**


Dependencies: **ADV\_SPM.1 Informal TOE security policy model**

## 10.9 Replay detection (FPT\_RPL)

### Family behaviour

This family addresses detection of replay for various types of entities (e.g. messages, service requests, service responses) and subsequent actions to correct. In the case where replay may be detected, this effectively prevents it.

### Component levelling



The family consists of only one component, FPT\_RPL.1 Replay detection, which requires that the TSF shall be able to detect the replay of identified entities.

### Management: FPT\_RPL.1

The following actions could be considered for the management functions in FMT:

- a) management of the list of identified entities for which replay shall be detected;
- b) management of the list of actions that need to be taken in case of replay.

### Audit: FPT\_RPL.1

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP / ST:

- a) Basic: Detected replay attacks.
- b) Detailed: Action to be taken based on the specific actions.

### FPT\_RPL.1 **Replay detection**

Hierarchical to: No other components.

**FPT\_RPL.1.1 The TSF shall detect replay for the following entities: [assignment: *list of identified entities*].**

**FPT\_RPL.1.2 The TSF shall perform [assignment: *list of specific actions*] when replay is detected.**

Dependencies: No dependencies.

## 10.10 Reference mediation (FPT\_RVM)

### Family behaviour

The requirements of this family address the “always invoked” aspect of a traditional reference monitor. The goal of this family is to ensure, with respect to a given SFP, that all actions requiring policy enforcement are validated by the TSF against the SFP. If the portion of the TSF that enforces the SFP also meets the requirements of appropriate components from FPT\_SEP (Domain separation) and ADV\_INT (TSF internals), then that portion of the TSF provides a “reference monitor” for that SFP.

A TSF that implements a SFP provides effective protection against unauthorised operation if and only if all enforceable actions (e.g. accesses to objects) requested by untrusted subjects with respect to any or all of that SFP are validated by the TSF before succeeding. If an action that could be enforceable by the TSF, is incorrectly enforced or incorrectly bypassed, the overall enforcement of the SFP could be compromised. Subjects could then bypass the SFP in a variety of unauthorised ways (e.g. circumvent access checks for some subjects or objects, bypass checks for objects whose protection was assumed by applications, retain access rights beyond their intended lifetime, bypass auditing of audited actions, or bypass authentication). Note that some subjects, the so called “trusted subjects” with respect to a specific SFP, might be trusted to enforce the SFP by themselves, and bypass the mediation of the SFP.

### Component levelling



This family consists of only one component, FPT\_RVM.1 Non-bypassability of the TSP, which requires non-bypassability for all SFPs in the TSP.

Management: FPT\_RVM.1

There are no management activities foreseen.

Audit: FPT\_RVM.1

There are no actions identified that should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST.

### FPT\_RVM.1 Non-bypassability of the TSP

Hierarchical to: No other components.

**FPT\_RVM.1.1 The TSF shall ensure that TSP enforcement functions are invoked and succeed before each function within the TSC is allowed to proceed.**

Dependencies: No dependencies.

## 10.11 Domain separation (FPT\_SEP)

### Family behaviour

The components of this family ensure that at least one security domain is available for the TSF's own execution and that the TSF is protected from external interference and tampering (e.g. by modification of TSF code or data structures) by untrusted subjects. Satisfying the requirements of this family makes the TSF self-protecting, meaning that an untrusted subject cannot modify or damage the TSF.

This family requires the following:

- a) The resources of the TSF's security domain ("protected domain") and those of subjects and unconstrained entities external to the domain are separated such that the entities external to the protected domain cannot observe or modify TSF data or TSF code internal to the protected domain.
- b) The transfers between domains are controlled such that arbitrary entry to, or return from, the protected domain is not possible.
- c) The user or application parameters passed to the protected domain by addresses are validated with respect to the protected domain's address space, and those passed by value are validated with respect to the values expected by the protected domain.
- d) The security domains of subjects are distinct except for controlled sharing via the TSF.

### Component levelling



FPT\_SEP.1 TSF domain separation, provides a distinct protected domain for the TSF and provides separation between subjects within the TSC.

FPT\_SEP.2 SFP domain separation, requires that the TSF be further subdivided, with distinct domain(s) for an identified set of SFPs that act as reference monitors for their policies, and a domain for the remainder of the TSF, as well as domains for the non-TSF portions of the TOE.

FPT\_SEP.3 Complete reference monitor, requires that there be distinct domain(s) for TSP enforcement, a domain for the remainder of the TSF, as well as domains for the non-TSF portions of the TOE.

Management: FPT\_SEP.1, FPT\_SEP.2, FPT\_SEP.3

There are no management activities foreseen.

Audit: FPT\_SEP.1, FPT\_SEP.2, FPT\_SEP.3

There are no actions identified that should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST.

**FPT\_SEP.1 TSF domain separation**

Hierarchical to: No other components.

**FPT\_SEP.1.1** The TSF shall maintain a security domain for its own execution that protects it from interference and tampering by untrusted subjects.

**FPT\_SEP.1.2** The TSF shall enforce separation between the security domains of subjects in the TSC.

Dependencies: No dependencies.

**FPT\_SEP.2 SFP domain separation**

Hierarchical to: FPT\_SEP.1

**FPT\_SEP.2.1** The **unisolated portion of the** TSF shall maintain a security domain for its own execution that protects it from interference and tampering by untrusted subjects.

**FPT\_SEP.2.2** The TSF shall enforce separation between the security domains of subjects in the TSC.

**FPT\_SEP.2.3** The TSF shall maintain the part of the TSF related to [assignment: *list of access control and/or information flow control SFPs*] in a security domain for their own execution that protects them from interference and tampering by the remainder of the TSF and by subjects untrusted with respect to those SFPs.

Dependencies: No dependencies.

**FPT\_SEP.3 Complete reference monitor**

Hierarchical to: FPT\_SEP.2

**FPT\_SEP.3.1** The unisolated portion of the TSF shall maintain a security domain for its own execution that protects it from interference and tampering by untrusted subjects.

**FPT\_SEP.3.2** The TSF shall enforce separation between the security domains of subjects in the TSC.

**FPT\_SEP.3.3** The TSF shall maintain **the part of the TSF that enforces the access control and/or information flow control SFPs** in a security domain for its own execution that protects **them** from interference and tampering by the remainder of the TSF and by subjects untrusted with respect to **the TSP**.

Dependencies: No dependencies.


## 10.12 State synchrony protocol (FPT\_SSP)

### Family behaviour

Distributed systems may give rise to greater complexity than monolithic systems through the potential for differences in state between parts of the system, and through delays in communication. In most cases synchronisation of state between distributed functions involves an exchange protocol, not a simple action. When malice exists in the distributed environment of these protocols, more complex defensive protocols are required.

FPT\_SSP establishes the requirement for certain critical security functions of the TSF to use this trusted protocol. FPT\_SSP ensures that two distributed parts of the TOE (e.g. hosts) have synchronised their states after a security-relevant action.

### Component levelling



FPT\_SSP.1 Simple trusted acknowledgement requires only a simple acknowledgment by the data recipient.

FPT\_SSP.2 Mutual trusted acknowledgement requires mutual acknowledgment of the data exchange.

Management: FPT\_SSP.1, FPT\_SSP.2

There are no management activities foreseen.

Audit: FPT\_SSP.1, FPT\_SSP.2

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP / ST:

- a) Minimal: failure to receive an acknowledgement when expected.

### **FPT\_SSP.1 Simple trusted acknowledgement**

Hierarchical to: No other components.

**FPT\_SSP.1.1 The TSF shall acknowledge, when requested by another part of the TSF, the receipt of an unmodified TSF data transmission.**

Dependencies: **FPT\_ITT.1 Basic internal TSF data transfer protection**

**FPT\_SSP.2 Mutual trusted acknowledgement**

Hierarchical to: FPT\_SSP.1

**FPT\_SSP.2.1** The TSF shall acknowledge, when requested by another part of the TSF, the receipt of an unmodified TSF data transmission.

**FPT\_SSP.2.2** **The TSF shall ensure that the relevant parts of the TSF know the correct status of transmitted data among its different parts, using acknowledgements.**

Dependencies: FPT\_ITT.1 Basic internal TSF data transfer protection

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## 10.13 Time stamps (FPT\_STM)

Family behaviour

This family addresses requirements for a reliable time stamp function within a TOE.

Component levelling



This family consists of only one component, FPT\_STM.1 Reliable time stamps, which requires that the TSF provide reliable time stamps for TSF functions.

Management: FPT\_STM.1

The following actions could be considered for the management functions in FMT:

- a) management of the time.

Audit: FPT\_STM.1

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP / ST:

- a) Minimal: changes to the time.
- b) Detailed: providing a timestamp.

### FPT\_STM.1 Reliable time stamps

Hierarchical to: No other components.

**FPT\_STM.1.1 The TSF shall be able to provide reliable time stamps for its own use.**


Dependencies: No dependencies.

## 10.14 Inter-TSF TSF data consistency (FPT\_TDC)

### Family behaviour

In a distributed or composite system environment, a TOE may need to exchange TSF data (e.g. the SFP-attributes associated with data, audit information, identification information) with another trusted IT product. This family defines the requirements for sharing and consistent interpretation of these attributes between the TSF of the TOE and a different trusted IT product.

### Component levelling



FPT\_TDC.1 Inter-TSF basic TSF data consistency requires that the TSF provide the capability to ensure consistency of attributes between TSFs.

Management: FPT\_TDC.1

There are no management activities foreseen.

Audit: FPT\_TDC.1

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP / ST:

- a) Minimal: Successful use of TSF data consistency mechanisms.
- b) Basic: Use of the TSF data consistency mechanisms.
- c) Basic: Identification of which TSF data have been interpreted.
- d) Basic: Detection of modified TSF data.

### FPT\_TDC.1 Inter-TSF basic TSF data consistency

Hierarchical to: No other components.

**FPT\_TDC.1.1 The TSF shall provide the capability to consistently interpret [assignment: *list of TSF data types*] when shared between the TSF and another trusted IT product.**

**FPT\_TDC.1.2 The TSF shall use [assignment: *list of interpretation rules to be applied by the TSF*] when interpreting the TSF data from another trusted IT product.**

Dependencies: No dependencies.

## 10.15 Internal TOE TSF data replication consistency (FPT\_TRC)

### Family behaviour

The requirements of this family are needed to ensure the consistency of TSF data when such data is replicated internal to the TOE. Such data may become inconsistent if the internal channel between parts of the TOE becomes inoperative. If the TOE is internally structured as a network and parts of the TOE network connections are broken, this may occur when parts become disabled.

### Component levelling



This family consists of only one component, FPT\_TRC.1 Internal TSF consistency, which requires that the TSF ensure the consistency of TSF data that is replicated in multiple locations.

Management: for FPT\_TRC.1

There are no management activities foreseen.

Audit: for FPT\_TRC.1

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP / ST:

- a) Minimal: restoring consistency upon reconnection.
- b) Basic: Detected inconsistency between TSF data.

### FPT\_TRC.1 Internal TSF consistency

Hierarchical to: No other components.

**FPT\_TRC.1.1** The TSF shall ensure that TSF data is consistent when replicated between parts of the TOE.

**FPT\_TRC.1.2** When parts of the TOE containing replicated TSF data are disconnected, the TSF shall ensure the consistency of the replicated TSF data upon reconnection before processing any requests for [assignment: *list of SFs dependent on TSF data replication consistency*].

Dependencies: FPT\_ITT.1 Basic internal TSF data transfer protection


## 10.16 TSF self test (FPT\_TST)

### Family behaviour

The family defines the requirements for the self-testing of the TSF with respect to some expected correct operation. Examples are interfaces to enforcement functions, and sample arithmetical operations on critical parts of the TOE. These tests can be carried out at start-up, periodically, at the request of the authorised user, or when other conditions are met. The actions to be taken by the TOE as the result of self testing are defined in other families.

The requirements of this family are also needed to detect the corruption of TSF executable code (i.e. TSF software) and TSF data by various failures that do not necessarily stop the TOE's operation (which would be handled by other families). These checks must be performed because these failures may not necessarily be prevented. Such failures can occur either because of unforeseen failure modes or associated oversights in the design of hardware, firmware, or software, or because of malicious corruption of the TSF due to inadequate logical and/or physical protection.

### Component levelling



FPT\_TST.1 TSF testing, provides the ability to test the TSF's correct operation. These tests may be performed at start-up, periodically, at the request of the authorised user, or when other conditions are met. It also provides the ability to verify the integrity of TSF data and executable code.

Management: for FPT\_TST.1

The following actions could be considered for the management functions in FMT:

- a) management of the conditions under which TSF self testing occurs, such as during initial start-up, regular interval, or under specified conditions;
- b) management of the time interval if appropriate.

Audit: for FPT\_TST.1

The following actions should be audited if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Basic: Execution of the TSF self tests and the results of the tests.

**FPT\_TST.1 TSF testing**

Hierarchical to: No other components.

**FPT\_TST.1.1** The TSF shall run a suite of self tests [selection: *during initial start-up, periodically during normal operation, at the request of the authorised user, at the conditions* [assignment: *conditions under which self test should occur*]] to demonstrate the correct operation of the TSF.

**FPT\_TST.1.2** The TSF shall provide authorised users with the capability to verify the integrity of TSF data.

**FPT\_TST.1.3** The TSF shall provide authorised users with the capability to verify the integrity of stored TSF executable code.

Dependencies: **FPT\_AMT.1** Abstract machine testing

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## 11 Class FRU: Resource utilisation

This class provides three families that support the availability of required resources such as processing capability and/or storage capacity. The family Fault Tolerance provides protection against unavailability of capabilities caused by failure of the TOE. The family Priority of Service ensures that the resources will be allocated to the more important or time-critical tasks and cannot be monopolised by lower priority tasks. The family Resource Allocation provides limits on the use of available resources, therefore preventing users from monopolising the resources.

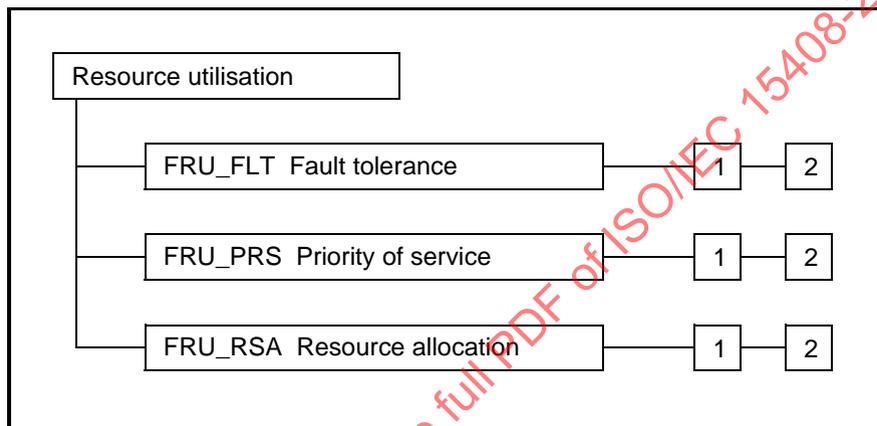



Figure 11.1 - Resource utilisation class decomposition

## 11.1 Fault tolerance (FRU\_FLT)

### Family behaviour

The requirements of this family ensure that the TOE will maintain correct operation even in the event of failures.

### Component levelling



FRU\_FLT.1 Degraded fault tolerance requires the TOE to continue correct operation of identified capabilities in the event of identified failures.

FRU\_FLT.2 Limited fault tolerance requires the TOE to continue correct operation of all capabilities in the event of identified failures.

Management: FRU\_FLT.1, FRU\_FLT.2

There are no management activities foreseen.

Audit: FRU\_FLT.1

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: Any failure detected by the TSF.
- b) Basic: All TOE capabilities being discontinued due to a failure.

Audit: FRU\_FLT.2

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: Any failure detected by the TSF.

### FRU\_FLT.1 Degraded fault tolerance

Hierarchical to: No other components.

**FRU\_FLT.1.1 The TSF shall ensure the operation of [assignment: list of TOE capabilities] when the following failures occur: [assignment: list of type of failures].**

Dependencies: **FPT\_FLS.1 Failure with preservation of secure state**

**FRU\_FLT.2 Limited fault tolerance**

Hierarchical to: FRU\_FLT.1

**FRU\_FLT.2.1** The TSF shall ensure the operation of **all the TOE's capabilities** when the following failures occur :[assignment: *list of type of failures*].

Dependencies: FPT\_FLS.1 Failure with preservation of secure state

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## 11.2 Priority of service (FRU\_PRS)

### Family behaviour

The requirements of this family allow the TSF to control the use of resources within the TSC by users and subjects such that high priority activities within the TSC will always be accomplished without undue interference or delay caused by low priority activities.

### Component levelling



FRU\_PRS.1 Limited priority of service provides priorities for a subject's use of a subset of the resources within the TSC.

FRU\_PRS.2 Full priority of service provides priorities for a subject's use of all of the resources within the TSC.

Management: FRU\_PRS.1, FRU\_PRS.2

The following actions could be considered for the management activities in FMT:

- a) assignment of priorities to each subject in the TSF.

Audit: FRU\_PRS.1, FRU\_PRS.2

The following actions shall be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: Rejection of operation based on the use of priority within an allocation.
- b) Basic: All attempted uses of the allocation function which involves the priority of the service functions.

### FRU\_PRS.1 Limited priority of service

Hierarchical to: No other components.

**FRU\_PRS.1.1 The TSF shall assign a priority to each subject in the TSF.**

**FRU\_PRS.1.2 The TSF shall ensure that each access to [assignment: *controlled resources*] shall be mediated on the basis of the subjects assigned priority.**

Dependencies: No dependencies.

**FRU\_PRS.2 Full priority of service**

Hierarchical to: FRU\_PRS.1

**FRU\_PRS.2.1** The TSF shall assign a priority to each subject in the TSF.

**FRU\_PRS.2.2** The TSF shall ensure that each access to **all shareable resources** shall be mediated on the basis of the subjects assigned priority.

Dependencies: No dependencies.


IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

### 11.3 Resource allocation (FRU\_RSA)

#### Family behaviour

The requirements of this family allow the TSF to control the use of resources by users and subjects such that denial of service will not occur because of unauthorised monopolisation of resources.

#### Component levelling



FRU\_RSA.1 Maximum quotas provides requirements for quota mechanisms that ensure that users and subjects will not monopolise a controlled resource.

FRU\_RSA.2 Minimum and maximum quotas provides requirements for quota mechanisms that ensure that users and subjects will always have at least a minimum of a specified resource and that they will not be able to monopolise a controlled resource.

Management: FRU\_RSA.1

The following actions could be considered for the management activities in FMT:

- a) specifying maximum limits for a resource for groups and/or individual users and/or subjects by an administrator.

Management: FRU\_RSA.2

The following actions could be considered for the management activities in FMT:

- a) specifying minimum and maximum limits for a resource for groups and/or individual users and/or subjects by an administrator.

Audit: FRU\_RSA.1, FRU\_RSA.2

The following actions shall be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: Rejection of allocation operation due to resource limits.
- b) Basic: All attempted uses of the resource allocation functions for resources that are under control of the TSF.

**FRU\_RSA.1 Maximum quotas**

Hierarchical to: No other components.

**FRU\_RSA.1.1** The TSF shall enforce maximum quotas of the following resources: [assignment: *controlled resources*] that [selection: *individual user, defined group of users, subjects*] can use [selection: *simultaneously, over a specified period of time*].

Dependencies: No dependencies.

**FRU\_RSA.2 Minimum and maximum quotas**

Hierarchical to: FRU\_RSA.1

**FRU\_RSA.2.1** The TSF shall enforce maximum quotas of the following resources [assignment: *controlled resources*] that [selection: *individual user, defined group of users*] can use [selection: *simultaneously, over a specified period of time*].

**FRU\_RSA.2.2** The TSF shall ensure the provision of minimum quantity of each [assignment: *controlled resource*] that is available for [selection: *an individual user, defined group of users, subjects*] to use [selection: *simultaneously, over a specified period of time*]

Dependencies: No dependencies.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## 12 Class FTA: TOE access

This family specifies functional requirements for controlling the establishment of a user's session.

Figure 12.1 shows the decomposition of this class into its constituent components.

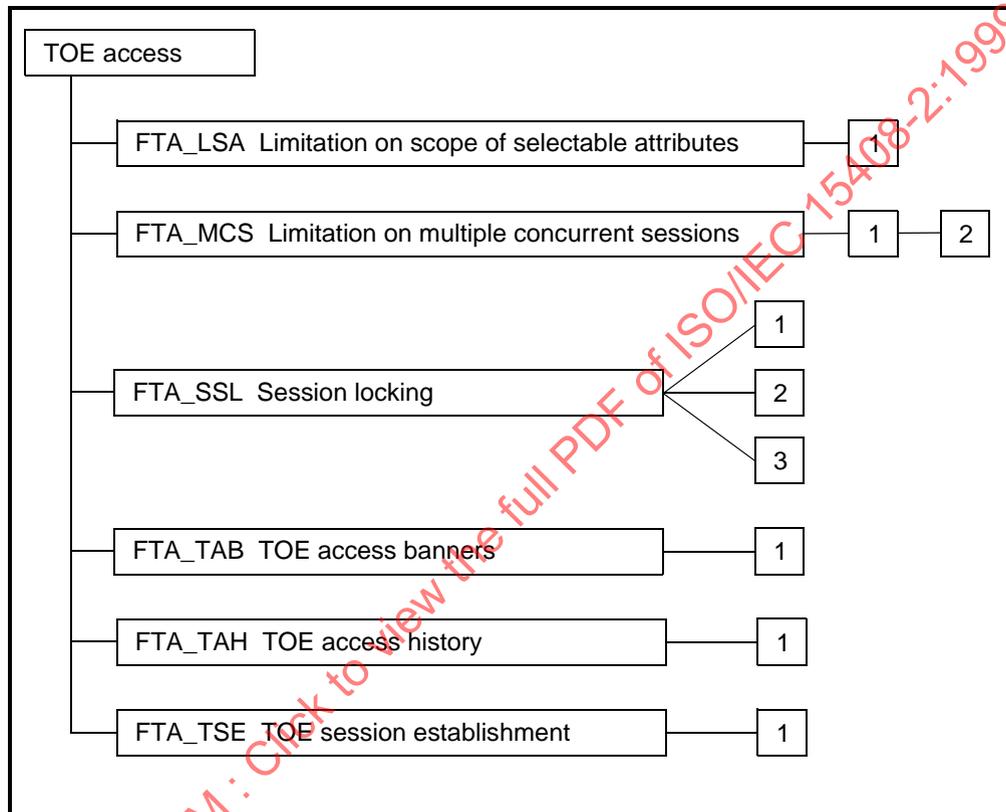



Figure 12.1 - TOE access class decomposition

## 12.1 Limitation on scope of selectable attributes (FTA\_LSA)

Family behaviour

This family defines requirements to limit the scope of session security attributes that a user may select for a session.

Component levelling



FTA\_LSA.1 Limitation on scope of selectable attributes provides the requirement for a TOE to limit the scope of the session security attributes during session establishment.

Management: FTA\_LSA.1

The following actions could be considered for the management activities in FMT:

- a) management of the scope of the session security attributes by an administrator.

Audit: FTA\_LSA.1

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: All failed attempts at selecting a session security attributes;
- b) Basic: All attempts at selecting a session security attributes;
- c) Detailed: Capture of the values of each session security attributes.

### FTA\_LSA.1 Limitation on scope of selectable attributes

Hierarchical to: No other components.

**FTA\_LSA.1.1 The TSF shall restrict the scope of the session security attributes [assignment: *session security attributes*], based on [assignment: *attributes*].**


Dependencies: No dependencies.

## 12.2 Limitation on multiple concurrent sessions (FTA\_MCS)

### Family behaviour

This family defines requirements to place limits on the number of concurrent sessions that belong to the same user.

### Component levelling



FTA\_MCS.1 Basic limitation on multiple concurrent sessions provides limitations that apply to all users of the TSF.

FTA\_MCS.2 Per user attribute limitation on multiple concurrent sessions extends FTA\_MCS.1 by requiring the ability to specify limitations on the number of concurrent sessions based on the related security attributes.

#### Management: FTA\_MCS.1

The following actions could be considered for the management activities in FMT:

- a) management of the maximum allowed number of concurrent user sessions by an administrator.

#### Management: FTA\_MCS.2

The following actions could be considered for the management activities in FMT:

- a) management of the rules that govern the maximum allowed number of concurrent user sessions by an administrator.

#### Audit: FTA\_MCS.1, FTA\_MCS.2

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: Rejection of a new session based on the limitation of multiple concurrent sessions.
- b) Detailed: Capture of the number of currently concurrent user sessions and the user security attribute(s).

**FTA\_MCS.1 Basic limitation on multiple concurrent sessions**

Hierarchical to: No other components.

**FTA\_MCS.1.1** The TSF shall restrict the maximum number of concurrent sessions that belong to the same user.

**FTA\_MCS.1.2** The TSF shall enforce, by default, a limit of [assignment: *default number*] sessions per user.

Dependencies: FIA\_UID.1 Timing of identification

**FTA\_MCS.2 Per user attribute limitation on multiple concurrent sessions**

Hierarchical to: FTA\_MCS.1

**FTA\_MCS.2.1** The TSF shall restrict the maximum number of concurrent sessions that belong to the same user **according to the rules** [assignment: *rules for the number of maximum concurrent sessions*].

**FTA\_MCS.2.2** The TSF shall enforce, by default, a limit of [assignment: *default number*] sessions per user.

Dependencies: FIA\_UID.1 Timing of identification


IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## 12.3 Session locking (FTA\_SSL)

### Family behaviour

This family defines requirements for the TSF to provide the capability for TSF-initiated and user-initiated locking and unlocking of interactive sessions.

### Component levelling

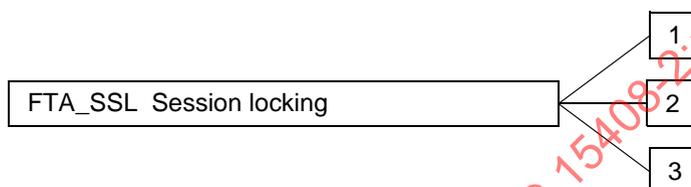

FTA\_SSL.1 TSF-initiated session locking includes system initiated locking of an interactive session after a specified period of user inactivity.

FTA\_SSL.2 User-initiated locking provides capabilities for the user to lock and unlock the user's own interactive sessions.

FTA\_SSL.3 TSF-initiated termination provides requirements for the TSF to terminate the session after a period of user inactivity.

#### Management: FTA\_SSL.1

The following actions could be considered for the management activities in FMT:

- a) specification of the time of user inactivity after which lock-out occurs for an individual user;
- b) specification of the default time of user inactivity after which lock-out occurs;
- c) management of the events that should occur prior to unlocking the session.

#### Management: FTA\_SSL.2

The following actions could be considered for the management activities in FMT:

- a) management of the events that should occur prior to unlocking the session.

#### Management: FTA\_SSL.3

The following actions could be considered for the management activities in FMT:

- a) specification of the time of user inactivity after which termination of the interactive session occurs for an individual user;

- b) specification of the default time of user inactivity after which termination of the interactive session occurs.

Audit: FTA\_SSL.1, FTA\_SSL.2

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: Locking of an interactive session by the session locking mechanism.
- b) Minimal: Successful unlocking of an interactive session.
- c) Basic: Any attempts at unlocking an interactive session.

Audit: FTA\_SSL.3

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: Termination of an interactive session by the session locking mechanism.

#### **FTA\_SSL.1 TSF-initiated session locking**

Hierarchical to: No other components.

**FTA\_SSL.1.1 The TSF shall lock an interactive session after [assignment: *time interval of user inactivity*] by:**

- a) **clearing or overwriting display devices, making the current contents unreadable;**
- b) **disabling any activity of the user's data access/display devices other than unlocking the session.**

**FTA\_SSL.1.2 The TSF shall require the following events to occur prior to unlocking the session: [assignment: *events to occur*].**

Dependencies: FIA\_UAU.1 Timing of authentication

#### **FTA\_SSL.2 User-initiated locking**

Hierarchical to: No other components.

**FTA\_SSL.2.1 The TSF shall allow user-initiated locking of the user's own interactive session, by:**

- a) **clearing or overwriting display devices, making the current contents unreadable;**

- b) **disabling any activity of the user's data access/display devices other than unlocking the session.**

**FTA\_SSL.2.2** The TSF shall require the following events to occur prior to unlocking the session: [assignment: *events to occur*].

Dependencies: FIA\_UAU.1 **Timing of authentication**

**FTA\_SSL.3 TSF-initiated termination**

Hierarchical to: No other components.

**FTA\_SSL.3.1** The TSF shall terminate an interactive session after a [assignment: *time interval of user inactivity*].

Dependencies: No dependencies.


IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## 12.4 TOE access banners (FTA\_TAB)

### Family behaviour

This family defines requirements to display a configurable advisory warning message to users regarding the appropriate use of the TOE.

### Component levelling



FTA\_TAB.1 Default TOE access banners provides the requirement for a TOE Access Banner. This banner is displayed prior to the establishment dialogue for a session.

### Management: FTA\_TAB.1

The following actions could be considered for the management activities in FMT:

- a) maintenance of the banner by the authorised administrator.

### Audit: FTA\_TAB.1

There are no actions identified that should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST.

### FTA\_TAB.1 Default TOE access banners

Hierarchical to: No other components.

**FTA\_TAB.1.1 Before establishing a user session, the TSF shall display an advisory warning message regarding unauthorised use of the TOE.**

Dependencies: No dependencies.

## 12.5 TOE access history (FTA\_TAH)

### Family behaviour

This family defines requirements for the TSF to display to a user, upon successful session establishment, a history of successful and unsuccessful attempts to access the user's account.

### Component levelling



FTA\_TAH.1 TOE access history provides the requirement for a TOE to display information related to previous attempts to establish a session.

Management: FTA\_TAH.1

There are no management activities foreseen.

Audit: FTA\_TAH.1

There are no actions identified that should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST.

### FTA\_TAH.1 TOE access history

Hierarchical to: No other components.

**FTA\_TAH.1.1** Upon successful session establishment, the TSF shall display the [selection: *date, time, method, location*] of the last successful session establishment to the user.

**FTA\_TAH.1.2** Upon successful session establishment, the TSF shall display the [selection: *date, time, method, location*] of the last unsuccessful attempt to session establishment and the number of unsuccessful attempts since the last successful session establishment.

**FTA\_TAH.1.3** The TSF shall not erase the access history information from the user interface without giving the user an opportunity to review the information.


Dependencies: No dependencies.

## 12.6 TOE session establishment (FTA\_TSE)

Family behaviour

This family defines requirements to deny a user permission to establish a session with the TOE.

Component levelling



FTA\_TSE.1 TOE session establishment provides requirements for denying users access to the TOE based on attributes.

Management: FTA\_TSE.1

The following actions could be considered for the management activities in FMT:

- a) management of the session establishment conditions by the authorised administrator.

Audit: FTA\_TSE.1

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: Denial of a session establishment due to the session establishment mechanism.
- b) Basic: All attempts at establishment of a user session.
- c) Detailed: Capture of the value of the selected access parameters (e.g. location of access, time of access).

### FTA\_TSE.1 TOE session establishment

Hierarchical to: No other components.

**FTA\_TSE.1.1 The TSF shall be able to deny session establishment based on [assignment: *attributes*].**

Dependencies: No dependencies.

## 13 Class FTP: Trusted path/channels

Families in this class provide requirements for a trusted communication path between users and the TSF, and for a trusted communication channel between the TSF and other trusted IT products. Trusted paths and channels have the following general characteristics:

- The communications path is constructed using internal and external communications channels (as appropriate for the component) that isolate an identified subset of TSF data and commands from the remainder of the TSF and user data.
- Use of the communications path may be initiated by the user and/or the TSF (as appropriate for the component)
- The communications path is capable of providing assurance that the user is communicating with the correct TSF, and that the TSF is communicating with the correct user (as appropriate for the component)

In this paradigm, a *trusted channel* is a communication channel that may be initiated by either side of the channel, and provides non-repudiation characteristics with respect to the identity of the sides of the channel.

A *trusted path* provides a means for users to perform functions through an assured direct interaction with the TSF. Trusted path is usually desired for user actions such as initial identification and/or authentication, but may also be desired at other times during a user's session. Trusted path exchanges may be initiated by a user or the TSF. User responses via the trusted path are guaranteed to be protected from modification by or disclosure to untrusted applications.

Figure 13.1 shows the decomposition of this class into its constituent components.

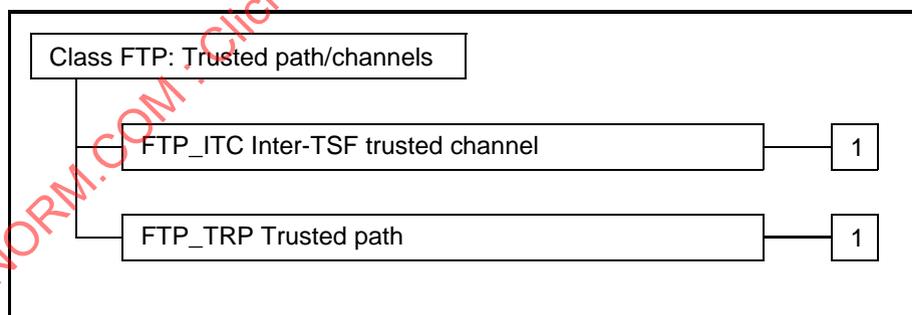



Figure 13.1 - Trusted path/channels class decomposition

## 13.1 Inter-TSF trusted channel (FTP\_ITC)

### Family behaviour

This family defines requirements for the creation of a trusted channel between the TSF and other trusted IT products for the performance of security critical operations. This family should be included whenever there are requirements for the secure communication of user or TSF data between the TOE and other trusted IT products.

### Component levelling



FTP\_ITC.1 Inter-TSF trusted channel requires that the TSF provide a trusted communication channel between itself and another trusted IT product.

Management: FTP\_ITC.1

The following actions could be considered for the management functions in FMT:

- a) Configuring the actions that require trusted channel, if supported.

Audit: FTP\_ITC.1

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: Failure of the trusted channel functions.
- b) Minimal: Identification of the initiator and target of failed trusted channel functions.
- c) Basic: All attempted uses of the trusted channel functions.
- d) Basic: Identification of the initiator and target of all trusted channel functions.

### FTP\_ITC.1 Inter-TSF trusted channel

Hierarchical to: No other components.

**FTP\_ITC.1.1 The TSF shall provide a communication channel between itself and a remote trusted IT product that is logically distinct from other communication channels and provides assured identification of its end points and protection of the channel data from modification or disclosure.**

**FTP\_ITC.1.2 The TSF shall permit [selection: *the TSF, the remote trusted IT product*] to initiate communication via the trusted channel.**

**FTP\_ITC.1.3** The TSF shall initiate communication via the trusted channel for [assignment: *list of functions for which a trusted channel is required*].

Dependencies: No dependencies.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## 13.2 Trusted path (FTP\_TRP)

### Family behaviour

This family defines the requirements to establish and maintain trusted communication to or from users and the TSF. A trusted path may be required for any security-relevant interaction. Trusted path exchanges may be initiated by a user during an interaction with the TSF, or the TSF may establish communication with the user via a trusted path.

### Component levelling



FTP\_TRP.1 Trusted path requires that a trusted path between the TSF and a user be provided for a set of events defined by a PP/ST author. The user and/or the TSF may have the ability to initiate the trusted path.

### Management: FTP\_TRP.1

The following actions could be considered for the management functions in FMT:

- a) Configuring the actions that require trusted path, if supported.

### Audit: FTP\_TRP.1

The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP / ST:

- a) Minimal: Failures of the trusted path functions.
- b) Minimal: Identification of the user associated with all trusted path failures, if available.
- c) Basic: All attempted uses of the trusted path functions.
- d) Basic: Identification of the user associated with all trusted path invocations, if available.

### FTP\_TRP.1 Trusted path

Hierarchical to: No other components.

**FTP\_TRP.1.1 The TSF shall provide a communication path between itself and [selection: *remote, local*] users that is logically distinct from other communication paths and provides assured identification of its end points and protection of the communicated data from modification or disclosure.**

**FTP\_TRP.1.2** The TSF shall permit [selection: *the TSF, local users, remote users*] to initiate communication via the trusted path.

**FTP\_TRP.1.3** The TSF shall require the use of the trusted path for [selection: *initial user authentication, [assignment: other services for which trusted path is required]*].

Dependencies: No dependencies.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## Annex A (informative)

### Security functional requirements application notes

This annex contains informative guidance for the families and components defined in the normative elements of this part of ISO/IEC 15408, which may be required by users, developers or evaluators to use the components. To facilitate finding the appropriate information, the presentation of the classes, families and components in this annex is similar to the presentation within the normative elements. The class, family, and component structures in this annex differ from those found in the main body of this part of ISO/IEC 15408, as this annex is concerned with only those sections that are informative.

#### A.1 Structure of the notes

This clause defines the content and presentation of the notes related to functional requirements of the CC.

##### A.1.1 Class structure

Figure A.1 below illustrates the functional class structure in this annex.

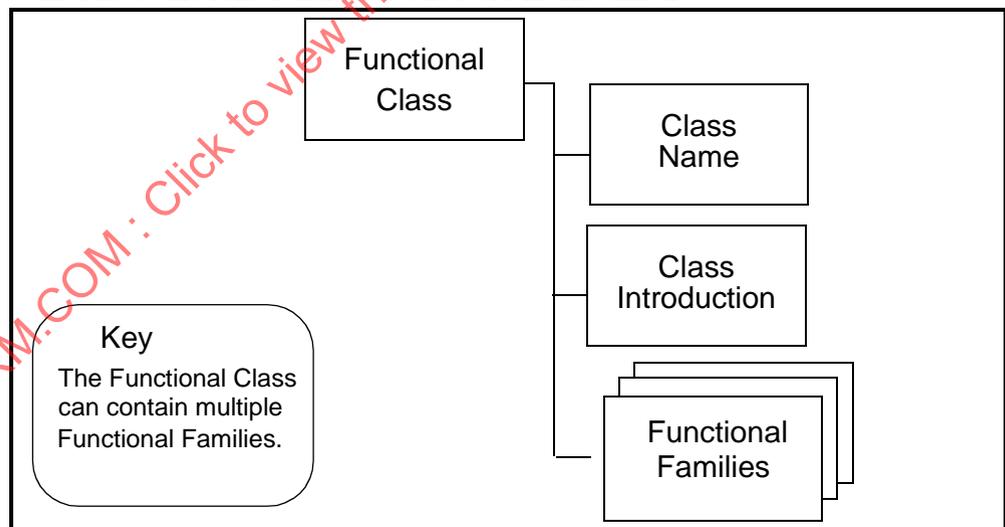


Figure A.1 - Functional class structure

##### A.1.1.1 Class name


This is the unique name of the class defined within the normative elements of this part of ISO/IEC 15408.

### A.1.1.2 Class introduction

The class introduction in this annex provides information about the use of the families and components of the class. This information is completed with the informative diagram that describes the organisation of each class with the families in each class and the hierarchical relationship between components in each family.

### A.1.2 Family structure

Figure A.2 illustrates the functional family structure for application notes in diagrammatic form.

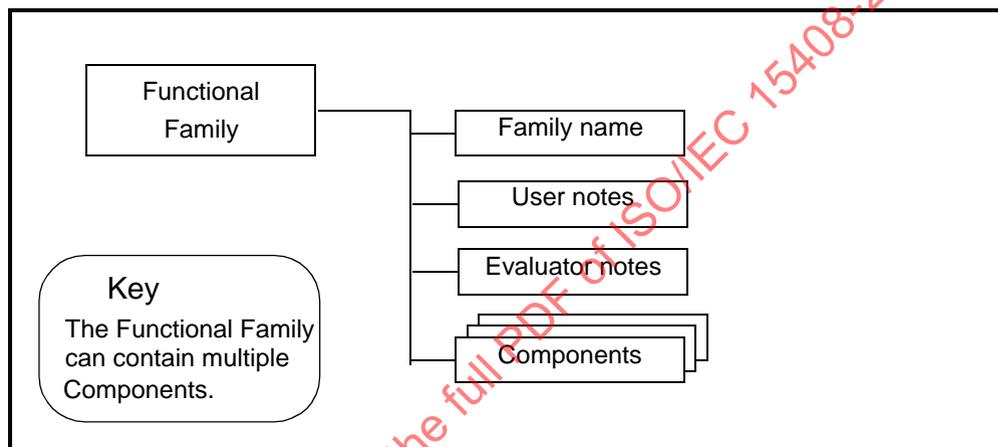

**Figure A.2 - Functional family structure for application notes**

#### A.1.2.1 Family name

This is the unique name of the family defined within the normative elements of this part of ISO/IEC 15408.

#### A.1.2.2 User notes

The *user notes* contain additional information that is of interest to potential users of the family, that is PP, ST and functional package authors, and developers of TOEs incorporating the functional components. The presentation is informative, and might cover warnings about limitations of use and areas where specific attention might be required when using the components.


#### A.1.2.3 Evaluator notes

The *evaluator notes* contain any information that is of interest to developers and evaluators of TOEs that claim compliance with a component of the family. The presentation is informative and can cover a variety of areas where specific attention might be needed when evaluating the TOE. This can include clarifications of meaning and specification of the way to interpret requirements, as well as caveats and warnings of specific interest to evaluators.

These User Notes and Evaluator Notes sections are not mandatory and appear only if appropriate.

### A.1.3 Component structure

Figure A.3 illustrates the functional component structure for the application notes.

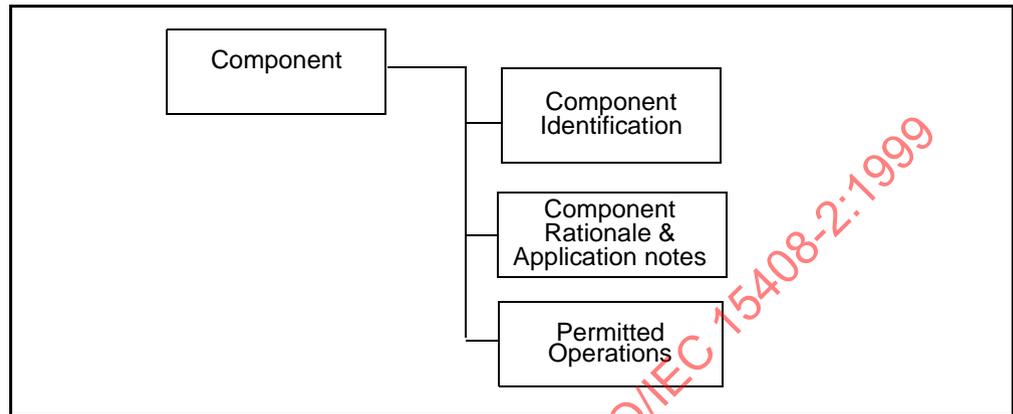

**Figure A.3 - Functional component structure**

#### A.1.3.1 Component identification

This is the unique name of the component defined within the normative elements of this part of ISO/IEC 15408.

#### A.1.3.2 Component rationale and application notes

Any specific information related to the component can be found in this section.

- The *rationale* contains the specifics of the rationale that refine the general statements on rationale for the specific level, and should only be used if level specific amplification is required.
- The *application notes* contain additional refinement in terms of narrative qualification as it pertains to a specific component. This refinement can pertain to user notes, and/or evaluator notes as described in A.1.2. This refinement can be used to explain the nature of the dependencies (e.g. shared information, or shared operation).

This section is not mandatory and appears only if appropriate.

#### A.1.3.3 Permitted operations

This portion of each component contains advice relating to the permitted operations of the component.

This section is not mandatory and appears only if appropriate.















## **Annex B (informative)**

### **Functional classes, families, and components**

The following Annexes C through M provide the application notes for the functional classes defined in the main body of this part of ISO/IEC 15408.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## Annex C (informative)

### Security audit (FAU)

CC audit families allow PP/ST authors the ability to define requirements for monitoring user activities and, in some cases, detecting real, potential, or imminent violations of the TSP. The TOE's security audit functions are defined to help monitor security-relevant events, and act as a deterrent against security violations. The requirements of the audit families refer to functions that include audit data protection, record format, and event selection, as well as analysis tools, violation alarms, and real-time analysis. The audit trail should be presented in human-readable format either directly (e.g. storing the audit trail in human-readable format) or indirectly (e.g. using audit reduction tools), or both.

While developing the security audit requirements, the PP/ST author should take note of the inter-relationships among the audit families and components. The potential exists to specify a set of audit requirements that comply with the family/component dependencies lists, while at the same time resulting in a deficient audit function (e.g. an audit function that requires all security relevant events to be audited but without the selectivity to control them on any reasonable basis such as individual user or object).

#### **Audit requirements in a distributed environment:**

The implementation of audit requirements for networks and other large systems may differ significantly from those needed for stand-alone systems. Larger, more complex and active systems require more thought concerning which audit data to collect and how this should be managed, due to lowered feasibility of interpreting (or even storing) what gets collected. The traditional notion of a time-sorted list or "trail" of audited events may not be applicable in a global asynchronous network with arbitrarily many events occurring at once.

Also, different hosts and servers on a distributed TOE may have differing naming policies and values. Symbolic names presentation for audit review may require a net-wide convention to avoid redundancies and "name clashes."

A multi-object audit repository, portions of which are accessible by a potentially wide variety of authorised users, may be required if audit repositories are to serve a useful function in distributed systems.

Finally, misuse of authority by authorised users should be addressed by systematically avoiding local storage of audit data pertaining to administrator actions.

Figure C.1 shows the decomposition of this class into its constituent components.

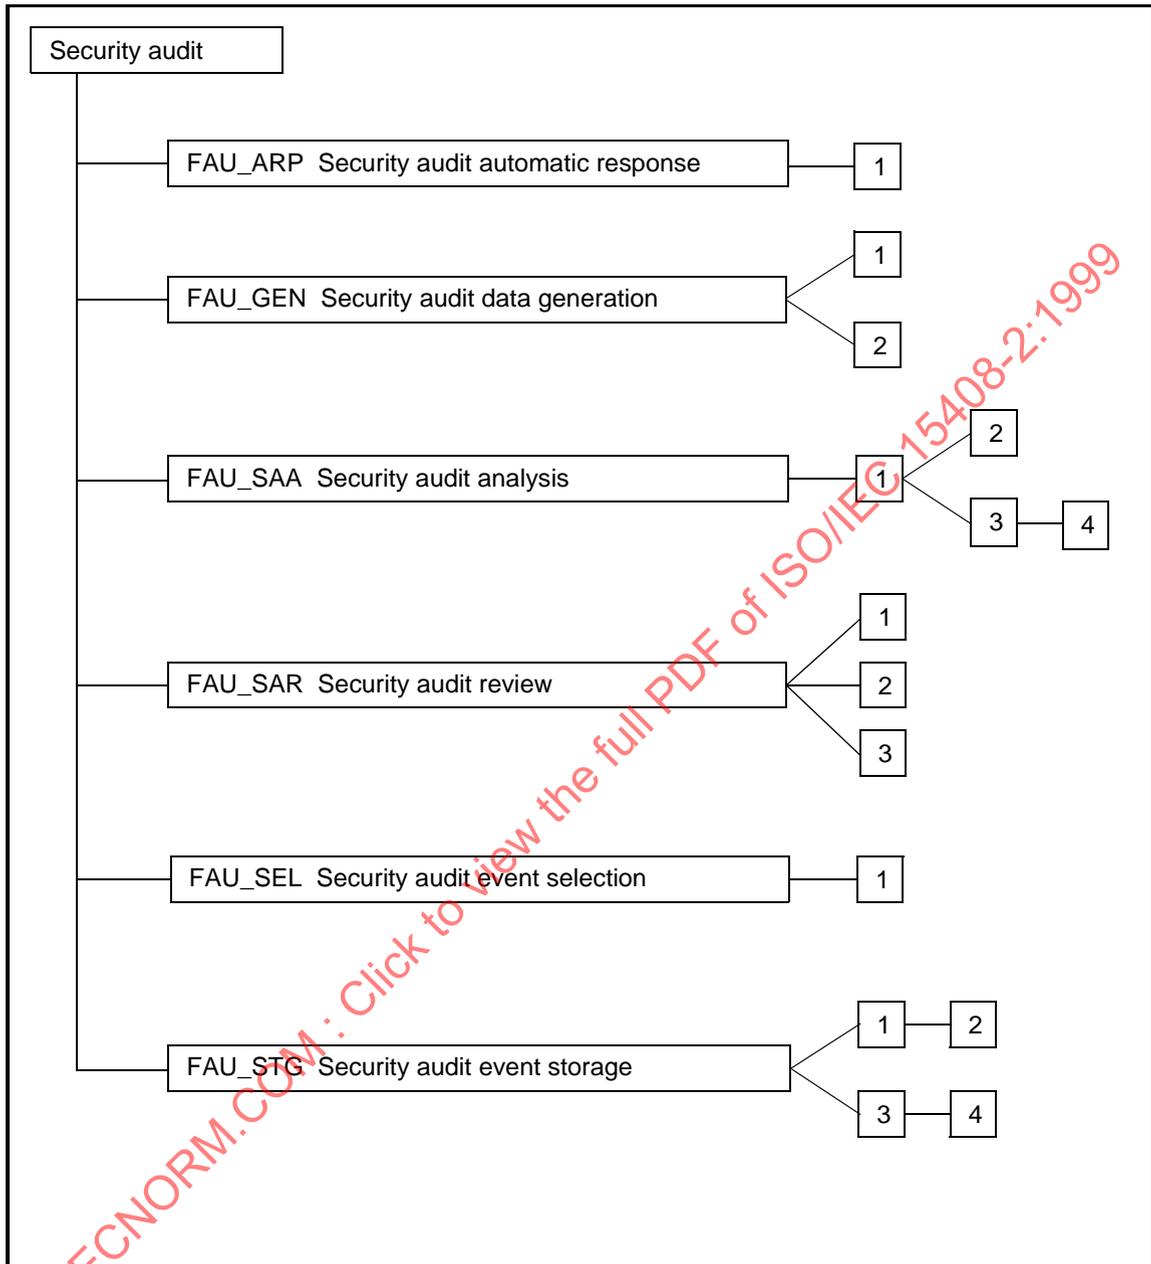


Figure C.1 - Security audit class decomposition

## C.1 Security audit automatic response (FAU\_ARP)

The Security audit automatic response family describes requirements for the handling of audit events. The requirement could include requirements for alarms or TSF action (automatic response). For example, the TSF could include the generation of real time alarms, termination of the offending process, disabling of a service, or disconnection or invalidation of a user account.

### Application Notes

An audit event is defined to be an “potential security violation” if so indicated by the FAU\_SAA components.

### FAU\_ARP.1 Security alarms

#### User application notes

An action should be taken for follow up action in the event of an alarm. This action can be to inform the authorised user, to present the authorised user with a set of possible containment actions, or to take corrective actions. The timing of the actions should be carefully considered by the PP/ST author.

#### Operations

##### Assignment:

**In FAU\_ARP.1.1 the PP/ST author should specify the actions to be taken in case of a potential security violation. An example of such a list is: “inform the authorised user, disable the subject that created the potential security violation.” It can also specify that the action to be taken can be specified by an authorised user.**

## C.2 Security audit data generation (FAU\_GEN)

The Security audit data generation family includes requirements to specify the audit events that should be generated by the TSF for security-relevant events.

This family is presented in a manner that avoids a dependency on all components requiring audit support. Each component has an audit section developed in which the events to be audited for that functional area are listed. When the PP/ST author assembles the PP/ST, the items in the audit area are used to complete the variable in this component. Thus, the specification of what could be audited for a functional area is localised in that functional area.

The list of auditable events is entirely dependent on the other functional families within the PP/ST. Each family definition should therefore include a list of its family-specific auditable events. Each auditable event in the list of auditable events specified in the functional family should correspond to one of the levels of audit event generation specified in this family (i.e. minimal, basic, detailed). This provides the PP/ST author with information necessary to ensure that all appropriate auditable events are specified in the PP/ST. The following example shows how auditable events are to be specified in appropriate functional families:

“The following actions should be auditable if FAU\_GEN Security audit data generation is included in the PP/ST:

- a) Minimal: Successful use of the user security attribute administration functions;
- b) Basic: All attempted uses of the user security attribute administration functions;
- c) Basic: Identification of which user security attributes have been modified;
- d) Detailed: With the exception of specific sensitive attribute data items (e.g. passwords, cryptographic keys), the new values of the attributes should be captured.”

For each functional component that is chosen, the auditable events that are indicated in that component, at and below the level indicated in FAU\_GEN should be auditable. If, for example, in the previous example ‘Basic’ would be selected in FAU\_GEN, the auditable events mentioned in a), b) and c) should be auditable.

Observe that the categorisation of auditable events is hierarchical. For example, when Basic Audit Generation is desired, all auditable events identified as being either Minimal or Basic, should also be included in the PP/ST through the use of the appropriate assignment operation, except when the higher level event simply provides more detail than the lower level event. When Detailed Audit Generation is desired, all identified auditable events (Minimal, Basic, and Detailed) should be included in the PP/ST.

A PP/ST author may decide to include other auditable events beyond those required for a given audit level. For example, the PP/ST may claim only minimal audit capabilities while including most of the basic capabilities because the few excluded capabilities conflict with other PP/ST constraints (e.g. because they require the collection of unavailable data).

### Application Notes

The functionality that creates the auditable event should be specified in the PP or ST as a functional requirement.

The following are examples of the types of the events that should be defined as auditable within each PP/ST functional component:

- a) Introduction of objects within the TSC into a subject's address space;
- b) Deletion of objects;
- c) Distribution or revocation of access rights or capabilities;
- d) Changes to subject or object security attributes;
- e) Policy checks performed by the TSF as a result of a request by a subject;
- f) The use of access rights to bypass a policy check;
- g) Use of Identification and Authentication functions;
- h) Actions taken by an operator, and/or authorised user (e.g. suppression of a TSF protection mechanism as human-readable labels);
- i) Import/export of data from/to removable media (e.g. printed output, tapes, diskettes).

### **FAU\_GEN.1 Audit data generation**

#### **User application notes**

This component defines requirements to identify the auditable events for which audit records should be generated, and the information to be provided in the audit records.

FAU\_GEN.1 by itself might be used when the TSP does not require that individual user identities be associated with audit events. This could be appropriate when the PP/ST also contains privacy requirements. If the user identity must be incorporated FAU\_GEN.2 could be used in addition.

#### **Evaluator application notes**

There is a dependency on FPT\_STM. If correctness of time is not an issue for this TOE, elimination of this dependency could be justified.

#### **Operations**

##### **Selection:**

**For FAU\_GEN.1.1b, the PP/ST author should select the level of auditable events called out in the audit section of other functional components included in the PP/ST. This level could be 'minimum', 'basic', 'detailed' or 'not specified'. If 'not specified' is selected, the PP/ST author should fill in all desired auditable events in FAU\_GEN.1.1c, and this part of the element (item b) can be removed entirely.**

##### **Assignment:**

**For FAU\_GEN.1.1c, the PP/ST author should assign a list of other specifically defined auditable events to be included in the list of auditable events. These events**

could be auditable events of a functional requirement that are of higher audit level than requested in FAU\_GEN.1.1b, as well as the events generated through the use of a specified Application Programming Interface (API).

For FAU\_GEN.1.2b, the PP/ST author should assign, for each auditable events included in the PP/ST, a list of other audit relevant information to be included in audit event records.

## FAU\_GEN.2 User identity association

### User application notes

This component addresses the requirement of accountability of auditable events at the level of individual user identity. This component should be used in addition to FAU\_GEN.1 Audit data generation.

There is a potential conflict between the audit and privacy requirements. For audit purposes it may be desirable to know who performed an action. The user may want to keep his/her actions to himself/herself and not be identified by other persons (e.g. a site with job offers). Or it might be required in the Organisational Security Policy that the identity of the users must be protected. In those cases the objectives for audit and privacy might contradict each other. Therefore if this requirement is selected and privacy is important, inclusion of the component user pseudonymity might be considered. Requirements on determining the real user name based on its pseudonym are specified in the privacy class.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

### C.3 Security audit analysis (FAU\_SAA)

This family defines requirements for automated means that analyse system activity and audit data looking for possible or real security violations. This analysis may work in support of intrusion detection, or automatic response to an imminent security violation.

The action to be performed by the TSF on detection of a possible imminent or potential violation is defined in FAU\_ARP Security audit automatic response components.

#### Application Notes

For real-time analysis, audit data could be transformed into a useful format for automated treatment, but into a different useful format for delivery to authorised users for review.

#### FAU\_SAA.1 Potential violation analysis

##### User application notes

This component is used to specify the set of auditable events whose occurrence or accumulated occurrence held to indicate a potential violation of the TSP, and any rules to be used to perform the violation analysis.

##### Operations

###### Assignment:

**For FAU\_SAA.1.2.a, the PP/ST author should identify the subset of defined auditable events whose occurrence or accumulated occurrence need to be detected as an indication of a potential violation of the TSP.**

###### Assignment:

**In FAU\_SAA.1.2.b, the PP/ST author should specify any other rules that the TSF should use in its analysis of the audit trail. Those rules could include specific requirements to express the needs for the events to occur in a certain period of time (e.g. period of the day, duration).**

#### FAU\_SAA.2 Profile based anomaly detection

A *profile* is a structure that characterises the behaviour of users and/or subjects; it represents how the users/subjects interact with the TSF in a variety of ways. Patterns of usage are established with respect to the various types of activity the users/subjects engage in (e.g. patterns in exceptions raised, patterns in resource utilisation (when, which, how), patterns in actions performed). The ways in which the various types of activity are recorded in the profile (e.g. resource measures, event counters, timers) are referred to as *profile metrics*.

Each profile represents the expected patterns of usage performed by members of the *profile target group*. This pattern may be based on past use (historical patterns) or on normal use for users of similar target groups (expected behaviour). A profile target group refers to one or more users who interact with the TSF. The activity of each member of the profile group is used by the analysis tool

in establishing the usage patterns represented in the profile. The following are some examples of profile target groups:

- a) **Single user account:** one profile per user;
- b) **Group ID or Group Account:** one profile for all users who possess the same group ID or operate using the same group account;
- c) **Operating Role:** one profile for all users sharing a given operating role;
- d) **System:** one profile for all users of a system.

Each member of a profile target group is assigned an individual *suspicion rating* that represents how closely that member's new activity corresponds to the established patterns of usage represented in the group profile.

The sophistication of the anomaly detection tool will largely be determined by the number of target profile groups required by the PP/ST and the complexity of the required profile metrics.

This component is used to specify the set of auditable events whose occurrence or accumulated occurrence indicates a potential violation of the TSP, and any rules to be used to perform the violation analysis. This set of events or rules could be modified by the authorised user, through addition, modification or deletion of events or rules.

The PP/ST author should enumerate specifically what activity should be monitored and/or analysed by the TSF. The PP/ST author should also identify specifically what information pertaining to the activity is necessary to construct the usage profiles.

FAU\_SAA.2 requires that the TSF maintain profiles of system usage. The word maintain implies that the anomaly detector is actively updating the usage profile based on new activity performed by the profile target members. It is important here that the metrics for representing user activity are defined by the PP/ST author. For example, there may be a thousand different actions an individual may be capable of performing, but the anomaly detector may choose to monitor a subset of that activity. Anomalous activity gets integrated into the profile just like non-anomalous activity (assuming the tool is monitoring those actions). Things that may have appeared anomalous four months ago, might over time become the norm (and vice-versa) as the user's work duties change. The TSF wouldn't be able to capture this notion if it filtered out anomalous activity from the profile updating algorithms.

Administrative notification should be provided such that the authorised user understands the significance of the suspicion rating.

The PP/ST author should define how to interpret suspicion ratings and the conditions under which anomalous activity is indicated to the FAU\_ARP mechanism.

## Operations

### Assignment:

**For FAU\_SAA.2.1, the PP/ST author should specify the profile target group. A single PP/ST may include multiple profile target groups.**

**For FAU\_SAA.2.3, the PP/ST author should specify conditions under which anomalous activity is reported by the TSF. Conditions may include the suspicion rating reaching a certain value, or be based on the type of anomalous activity observed.**

### **FAU\_SAA.3 Simple attack heuristics**

#### User application notes

In practice, it is at best rare when an analysis tool can detect with certainty when a security violation is imminent. However, there do exist some system events that are so significant that they are always worthy of independent review. Example of such events include the deletion of a key TSF security data file (e.g. the password file) or activity such as a remote user attempting to gain administrative privilege. These events are referred to as *signature events* in that their occurrence in isolation from the rest of the system activity are indicative of intrusive activity.

The complexity of a given tool will depend greatly on the assignments defined by the PP/ST author in identifying the base set of signature events.

The PP/ST author should enumerate specifically what events should be monitored by the TSF in order to perform the analysis. The PP/ST author should identify specifically what information pertaining to the event is necessary to determine if the event maps to a signature event.

Administrative notification should be provided such that the authorised user understands the significance of the event and the appropriate possible responses.

An effort was made in the specification of these requirements to avoid a dependency on audit data as the sole input for monitoring system activity. This was done in recognition of the existence of previously developed intrusion detection tools that do not perform their analyses of system activity solely through the use of audit data (examples of other input data include network datagrams, resource/accounting data, or combinations of various system data).

The elements of FAU\_SAA.3 do not require that the TSF implementing the immediate attack heuristics be the same TSF whose activity is being monitored. Thus, one can develop an intrusion detection component that operates independently of the system whose system activity is being analysed.

#### Operations

##### Assignment:

**For FAU\_SAA.3.1, the PP/ST author should identify a base subset of system events whose occurrence, in isolation from all other system activity, may indicate a violation of the TSP. These include events that by themselves indicate a clear violation to the TSP, or whose occurrence is so significant that they warrant actions.**

**In FAU\_SAA.3.2, the PP/ST author should specify the information used to determine system activity. This information is the input data used by the analysis tool to determine the system activity that has occurred on the TOE. This data may include audit data, combinations of audit data with other system data, or may**

**consist of data other than the audit data. The PP/ST author should define precisely what system events and event attributes are being monitored within the input data.**

#### **FAU\_SAA.4 Complex attack heuristics**

##### User application notes

In practice, it is at best rare when an analysis tool can detect with certainty when a security violation is imminent. However, there do exist some system events that are so significant they are always worthy of independent review. Example of such events include the deletion of a key TSF security data file (e.g. the password file) or activity such as a remote user attempting to gain administrative privilege. These events are referred to as *signature events* in that their occurrence in isolation from the rest of the system activity are indicative of intrusive activity. Event sequences are an ordered set of signature events that might indicate intrusive activity.

The complexity of a given tool will depend greatly on the assignments defined by the PP/ST author in identifying the base set of signature events and event sequences.

The PP/ST author should define a base set of signature events and event sequences to be represented by the TSF. Additional signature events and event sequences may be defined by the system developer.

The PP/ST author should enumerate specifically what events should be monitored by the TSF in order to perform the analysis. The PP/ST author should identify specifically what information pertaining to the event is necessary to determine if the event maps to a signature event.

Administrative notification should be provided such that the authorised user understands the significance of the event and the appropriate possible responses.

An effort was made in the specification of these requirements to avoid a dependency on audit data as the sole input for monitoring system activity. This was done in recognition of the existence of previously developed intrusion detection tools that do not perform their analyses of system activity solely through the use of audit data (examples of other input data include network datagrams, resource/accounting data, or combinations of various system data). Levelling, therefore, requires the PP/ST author to specify the type of input data used to monitor system activity.

The elements of FAU\_SAA.4 do not require that the TSF implementing the complex attack heuristics be the same TSF whose activity is being monitored. Thus, one can develop an intrusion detection component that operates independently of the system whose system activity is being analysed.

##### Operations

###### Assignment:

**For FAU\_SAA.4.1, the PP/ST author should identify a base set of list of sequences of system events whose occurrence are representative of known penetration scenarios. These event sequences represent known penetration scenarios. Each event represented in the sequence should map to a monitored system event, such**

**that as the system events are performed, they are bound (mapped) to the known penetration event sequences.**

For FAU\_SAA.4.1, the PP/ST author should identify a base subset of system events whose occurrence, in isolation from all other system activity, may indicate a violation of the TSP. These include events that by themselves indicate a clear violation to the TSP, or whose occurrence is so significant they warrant action.

In FAU\_SAA.4.2, the PP/ST author should specify the information used to determine system activity. This information is the input data used by the analysis tool to determine the system activity that has occurred on the TOE. This data may include audit data, combinations of audit data with other system data, or may consist of data other than the audit data. The PP/ST author should define precisely what system events and event attributes are being monitored within the input data.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## C.4 Security audit review (FAU\_SAR)

The Security audit review family defines requirements related to review of the audit information.

These functions should allow pre-storage or post-storage audit selection that includes, for example, the ability to selectively review:

- the actions of one or more users (e.g. identification, authentication, TOE entry, and access control actions);
- the actions performed on a specific object or TOE resource;
- all of a specified set of audited exceptions; or
- actions associated with a specific TSP attribute.

### Application Notes

The distinction between audit reviews is based on functionality. Audit review (only) encompasses the ability to view audit data. Selectable review is more sophisticated, and requires the ability to perform searches based on a single criterion or multiple criteria with logical (i.e. and/or) relations, sort audit data, filter audit data, before audit data are reviewed.

### FAU\_SAR.1 Audit review

#### User application notes

This component is used to specify that users and/or authorised users can read the audit records. These audit records will be provided in a manner appropriate to the user. There are different types of users (human users, machine users) that might have different needs.

The content of the audit records that can be viewed can be specified.

#### Operations

##### Assignment:

**In FAU\_SAR.1.1 the PP/ST author should specify the authorised users that can use this capability. If appropriate the PP/ST author may include security roles (see FMT\_SMR.1 Security roles).**

**In FAU\_SAR.1.1 the PP/ST author should specify the type of information the specified user is permitted to obtain from the audit records. Examples are “all”, “subject identity”, “all information belonging to audit records referencing this user”.**

### FAU\_SAR.2 Restricted audit review

#### User application notes

This component specifies that any users not identified in FAU\_SAR.1 will not be able to read the audit records.

### FAU\_SAR.3 Selectable audit review

#### User application notes

This component is used to specify that it should be possible to perform selection of the audit data to be reviewed. If based on multiple criteria, those criteria should be related together with logical (i.e. 'and' or 'or') relations, and the tools should provide the ability to manipulate audit data (e.g. sort, filter).

#### Operations

##### Selection:

**For FAU\_SAR.3.1 the PP/ST author should select whether searches, sorting and/or ordering can be performed by the TSF.**

##### Assignment:

**For FAU\_SAR.3.1, the PP/ST author should assign the criteria, possibly with logical relations, to be used to select the audit data for review. The logical relations are intended to specify whether the operation can be on an individual attribute or a collection of attributes. An example of this assignment could be: "application, user account and/or location". In this case the operation could be specified using any combination of the three attributes: application, user account and location.**

IECNORM.COM : Click to view the full text of ISO/IEC 15408-2:1999

## C.5 Security audit event selection (FAU\_SEL)

The Security audit event selection family provides requirements related to the capabilities of identifying which of the possible auditable events are to be audited. The auditable events are defined in the FAU\_GEN Security audit data generation family, but those events should be defined as being selectable in this component to be audited.

### Application Notes

This family ensures that it is possible to keep the audit trail from becoming so large that it becomes useless, by defining the appropriate granularity of the selected security audit events.

### FAU\_SEL.1 Selective audit

#### User application notes

This component defines the criteria used for the selection of events to be audited. Those criteria could permit inclusion or exclusion of events from the set of auditable events, based on user attributes, subject attributes, objects attributes, or event types.

The existence of individual user identities is not assumed for this component. This allows for TOEs such as routers that may not support the notion of users.

For a distributed environment, the host identity could be used as a selection criteria for events to be audited.

The management function FMT\_MTD.1 Management of TSF data will handle the rights of authorised users to query or modify the selections.

#### Operations

##### Selection:

**For FAU\_SEL.1.1a, the PP/ST author should select whether the security attributes upon which audit selectivity is based, is related to object identity, user identity, subject identity, host identity, or event type.**

##### Assignment:

**For FAU\_SEL.1.1b, the PP/ST author should specify any additional attributes upon which audit selectivity is based.**

## C.6 Security audit event storage (FAU\_STG)

The Security audit event storage family describes requirements for storing audit data for later use, including requirements controlling the loss of audit information due to system failure, attack and/or exhaustion of storage space.

### FAU\_STG.1 Protected audit trail storage

#### User application notes

In a distributed environment, as the location of the audit trail is in the TSC, but not necessarily co-located with the function generating the audit data, the PP/ST author could request authentication of the originator of the audit record, or non-repudiation of the origin of the record prior storing this record in the audit trail.

The TSF will protect the audit trail from unauthorised deletion and modification. It is noted that in some systems the auditor (role) might not be authorised to delete the audit records for a certain period of time.

#### Operations

##### Selection:

**In FAU\_STG.1.2, the PP/ST author should specify whether the TSF shall prevent or only be able to detect modifications of the audit trail.**

### FAU\_STG.2 Guarantees of audit data availability

#### User application notes

This component allows the PP/ST author to specify to which metrics the audit trail should conform.

In a distributed environment, as the location of the audit trail is in the TSC, but not necessarily co-located with the function generating the audit data, the PP/ST author could request authentication of the originator of the audit record, or non-repudiation of the origin of the record prior storing this record in the audit trail.

#### Operations

##### Selection:

In FAU\_STG.2.2, the PP/ST author should specify whether the TSF shall prevent or only be able to detect modifications of the audit trail.

**In FAU\_STG.2.3, the PP/ST author should specify the condition under which the TSF shall still be able to maintain a defined amount of audit data. This condition can be any one of the following: audit storage exhaustion, failure, attack.**

Assignment:

**In FAU\_STG.2.3, the PP/ST author should specify the metric that the TSF must ensure with respect to the audit trail. This metric limits the data loss by enumerating the number of records that must be kept, or the time that records are guaranteed to be maintained. An example of the metric could be “100,000” indicating that 100,000 audit records can be stored.**

### **FAU\_STG.3 Action in case of possible audit data loss**

User application notes

This component requires that actions will be taken when the audit trail exceeds certain pre-defined limits.

Operations

Assignment:

**In FAU\_STG.3.1, the PP/ST author should indicate the pre-defined limit. If the management functions indicate that this number might be changed by the authorised user, this value is the default value. The PP/ST author might choose to let the authorised user define this limit. In that case the assignment can be for example “an authorised user set limit”.**

**In FAU\_STG.3.1, the PP/ST author should specify actions that should be taken in case of imminent audit storage failure indicated by exceeding the threshold. Actions might include informing an authorised user.**

### **FAU\_STG.4 Prevention of audit data loss**

User application notes

This component specifies the behaviour of the TOE if the audit trail is full: either audit records are ignored, or the TOE is frozen such that no auditable events can take place. The requirement also states that no matter how the requirement is instantiated, the authorised user with specific rights to this effect, can continue to generate auditable events (actions). The reason is that otherwise the authorised user could not even reset the system. Consideration should be given to the choice of the action to be taken by the TSF in the case of audit storage exhaustion, as ignoring events, which provides better availability of the TOE, will also permit actions to be performed without being recorded and without the user being accountable.

Operations

Selection:

**In FAU\_STG.4.1, the PP/ST author should select whether the TSF shall ignore auditable actions, or whether it should prevent auditable actions from happening,**

**or whether the oldest audit records should be overwritten when the TSF can no longer store audit records.**

Assignment:

**In FAU\_STG.4.1, the PP/ST author should specify other actions that should be taken in case of audit storage failure, such as informing the authorised user.**


IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## Annex D (informative)

### Communication (FCO)

This class describes requirements specifically of interest for TOEs that are used for the transport of information. Families within this class deal with non-repudiation.

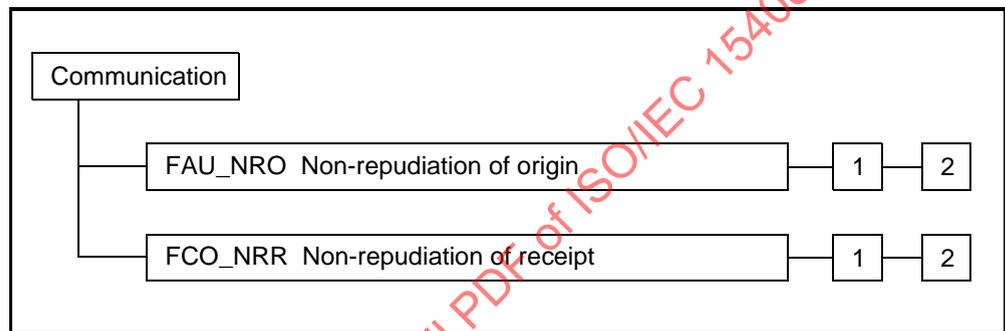

**Figure D.1 - Communication class decomposition**

Figure D.1 shows the decomposition of this class into its constituent components.

In this class the concept of “information” is used. This information should be interpreted as the object being communicated, and could contain an electronic mail message, a file, or a set of predefined attribute types.

In the literature, the terms ‘proof of receipt’ and ‘proof of origin’ are commonly used terms. However it is recognised that the term ‘proof’ might be interpreted in a legal sense to imply a form of mathematical rationale. The components in this class interpret the de-facto use of the word ‘proof’ in the context of ‘evidence’ that the TSF demonstrates the non-repudiated transport of types of information.

## D.1 Non-repudiation of origin (FCO\_NRO)

Non-repudiation of origin defines requirements to provide evidence to users/subjects about the identity of the originator of some information. The originator cannot successfully deny having sent the information because evidence of origin (e.g. digital signature) provides evidence of the binding between the originator and the information sent. The recipient or a third party can verify the evidence of origin. This evidence should not be forgeable.

### User notes

If the information or the associated attributes are altered in any way, validation of the evidence of origin might fail. Therefore a PP/ST author should consider including integrity requirements such as FDP\_UIT.1 Data exchange integrity in the PP/ST.

In non-repudiation there are several different roles involved, each of which could be combined in one or more subjects. The first role is a subject that requests evidence of origin (only in FCO\_NRO.1 Selective proof of origin). The second role is the recipient and/or other subjects to which the evidence is provided (e.g. a notary). The third role is a subject that requests verification of the evidence of origin, for example, a recipient or a third party such as an arbiter.

The PP/ST author must specify the conditions that must be met to be able to verify the validity of the evidence. An example of a condition which could be specified is where the verification of evidence must occur within 24 hours. These conditions, therefore, allow the tailoring of the non-repudiation to legal requirements, such as being able to provide evidence for several years.

In most cases, the identity of the recipient will be the identity of the user who received the transmission. In some instances, the PP/ST author does not want the user identity to be exported. In that case the PP/ST author must consider whether it is appropriate to include this class, or whether the identity of the transport service provider or the identity of the host should be used.

In addition to (or instead of) the user identity, a PP/ST author might be more concerned about the time the information was transmitted. For example, requests for proposals must be transmitted before a certain date in order to be considered. In such instances, these requirements can be customised to provide a timestamp indication (time of origin).

### FCO\_NRO.1 Selective proof of origin

#### Operations

Assignment:

**In FCO\_NRO.1.1 the PP/ST author should fill in the types of information subject to the evidence of origin function, for example, electronic mail messages.**

Selection:

**In FCO\_NRO.1.1 the PP/ST author should specify the user/subject who can request evidence of origin.**

**Assignment:**

**In FCO\_NRO.1.1 the PP/ST author, dependent on the selection, should specify the third parties that can request evidence of receipt. A third party could be an arbiter, judge or legal body.**

**In FCO\_NRO.1.2 the PP/ST author should fill in the list of the attributes that shall be linked to the information; for example, originator identity, time of origin, and location of origin.**

**In FCO\_NRO.1.2 the PP/ST author should fill in the list of information fields within the information over which the attributes provide evidence of origin, such as the body of a message.**

**Selection:**

**In FCO\_NRO.1.3 the PP/ST author should specify the user/subject who can verify the evidence of origin.**

**Assignment:**

**In FCO\_NRO.1.3 the PP/ST author, dependent on the selection, should specify the third parties that can verify the evidence of origin.**

**In FCO\_NRO.1.3 the PP/ST author should fill in the list of limitations under which the evidence can be verified. For example the evidence can only be verified within a 24 hour time interval. An assignment of 'immediate' or 'indefinite' is acceptable.**

**FCO\_NRO.2 Enforced proof of origin****Operations****Assignment:**

**In FCO\_NRO.2.1 the PP/ST author should fill in the types of information subject to the evidence of origin function, for example, electronic mail messages.**

**In FCO\_NRO.2.2 the PP/ST author should fill in the list of the attributes that shall be linked to the information; for example, originator identity, time of origin, and location of origin.**

**In FCO\_NRO.2.2 the PP/ST author should fill in the list of information fields within the information over which the attributes provide evidence of origin, such as the body of a message.**

**Selection:**

**In FCO\_NRO.2.3 the PP/ST author should specify the user/subject who can verify the evidence of origin.**

**Assignment:**

In FCO\_NRO.2.3 the PP/ST author, dependent on the selection, should specify the third parties that can verify the evidence of origin. A third party could be an arbiter, judge or legal body.

In FCO\_NRO.2.3 the PP/ST author should fill in the list of limitations under which the evidence can be verified. For example the evidence can only be verified within a 24 hour time interval. An assignment of 'immediate' or 'indefinite' is acceptable.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## D.2 Non-repudiation of receipt (FCO\_NRR)

Non-repudiation of receipt defines requirements to provide evidence to other users/subjects that the information was received by the recipient. The recipient cannot successfully deny having received the information because evidence of receipt (e.g. digital signature) provides evidence of the binding between the recipient attributes and the information. The originator or a third party can verify the evidence of receipt. This evidence should not be forgeable.

### User notes

It should be noted that the provision of evidence that the information was received does not necessarily imply that the information was read or comprehended, but only delivered.

If the information or the associated attributes are altered in any way, validation of the evidence of receipt with respect to the original information might fail. Therefore a PP/ST author should consider including integrity requirements such as FDP\_UIT.1 Data exchange integrity in the PP/ST.

In non-repudiation, there are several different roles involved, each of which could be combined in one or more subjects. The first role is a subject that requests evidence of receipt (only in FCO\_NRR.1 Selective proof of receipt). The second role is the recipient and/or other subjects to which the evidence is provided, (e.g. a notary). The third role is a subject that requests verification of the evidence of receipt, for example, an originator or a third party such as an arbiter.

The PP/ST author must specify the conditions that must be met to be able to verify the validity of the evidence. An example of a condition which could be specified is where the verification of evidence must occur within 24 hours. These conditions, therefore, allow the tailoring of the non-repudiation to legal requirements, such as being able to provide evidence for several years.

In most cases, the identity of the recipient will be the identity of the user who received the transmission. In some instances, the PP/ST author does not want the user identity to be exported. In that case, the PP/ST author must consider whether it is appropriate to include this class, or whether the identity of the transport service provider or the identity of the host should be used.

In addition to (or instead of) the user identity, a PP/ST author might be more concerned about the time the information was received. For example, when an offer expires at a certain date, orders must be received before a certain date in order to be considered. In such instances, these requirements can be customised to provide a timestamp indication (time of receipt).

### FCO\_NRR.1 Selective proof of receipt

#### Operations

Assignment:

**In FCO\_NRR.1.1 the PP/ST author should fill in the types of information subject to the evidence of receipt function, for example, electronic mail messages.**

Selection:

**In FCO\_NRR.1.1 the PP/ST author should specify the user/subject who can request evidence of receipt.**

Assignment:

**In FCO\_NRR.1.1 the PP/ST author, dependent on the selection, should specify the third parties that can request evidence of receipt. A third party could be an arbiter, judge or legal body.**

**In FCO\_NRR.1.2 the PP/ST author should fill in the list of the attributes that shall be linked to the information; for example, recipient identity, time of receipt, and location of receipt.**

**In FCO\_NRR.1.2 the PP/ST author should fill in the list of information fields with the fields within the information over which the attributes provide evidence of receipt, such as the body a message.**

Selection:

**In FCO\_NRR.1.3 the PP/ST author should specify the user/subjects who can verify the evidence of receipt.**

Assignment:

**In FCO\_NRR.1.3 the PP/ST author, dependent on the selection, should specify the third parties that can verify the evidence of receipt.**

**In FCO\_NRR.1.3 the PP/ST author should fill in the list of limitations under which the evidence can be verified. For example the evidence can only be verified within a 24 hour time interval. An assignment of 'immediate' or 'indefinite' is acceptable.**

## **FCO\_NRR.2 Enforced proof of receipt**

Operations

Assignment:

**In FCO\_NRR.2.1 the PP/ST author should fill in the types of information subject to the evidence of receipt function, for example electronic mail messages.**

**In FCO\_NRR.2.2 the PP/ST author should fill in the list of the attributes that shall be linked to the information; for example, recipient identity, time of receipt, and location of receipt.**

**In FCO\_NRR.2.2 the PP/ST author should fill in the list of information fields with the fields within the information over which the attributes provide evidence of receipt, such as the body of a message.**

**Selection:**

In FCO\_NRR.2.3 the PP/ST author should specify the user/subjects who can verify the evidence of receipt.

**Assignment:**

In FCO\_NRR.2.3 the PP/ST author, dependent on the selection, should specify the third parties that can verify the evidence of receipt. A third party could be an arbiter, judge or legal body.

In FCO\_NRR.2.3 the PP/ST author should fill in the list of limitations under which the evidence can be verified. For example the evidence can only be verified within a 24 hour time interval. An assignment of 'immediate' or 'indefinite' is acceptable.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999


## Annex E (informative)

### Cryptographic support (FCS)

The TSF may employ cryptographic functionality to help satisfy several high-level security objectives. These include (but are not limited to): identification and authentication, non-repudiation, trusted path, trusted channel and data separation. This class is used when the TOE implements cryptographic functions, the implementation of which could be in hardware, firmware and/or software.

The FCS class is composed of two families: FCO\_CKM Cryptographic key management and FCS\_COP Cryptographic operation. The FCS\_CKM family addresses the management aspects of cryptographic keys, while the FCS\_COP family is concerned with the operational use of those cryptographic keys.

Figure E.1 shows the decomposition of this class into its constituent components.

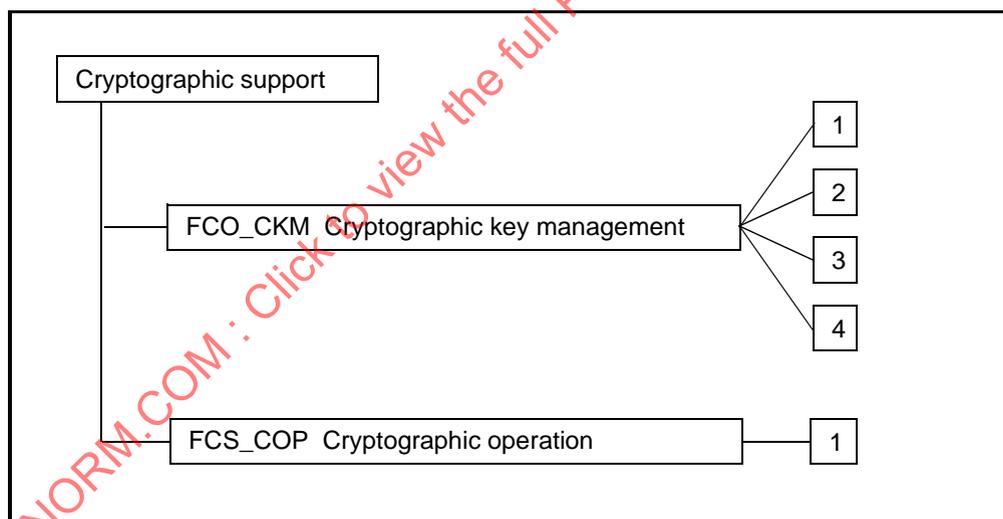

**Figure E.1 - Cryptographic support class decomposition**

For each cryptographic key generation method implemented by the TOE, if any, the PP/ST author should select the FCS\_CKM.1 component.

For each cryptographic key distribution method implemented by the TOE, if any, the PP/ST author should select the FCS\_CKM.2 component.

For each cryptographic key access method implemented by the TOE, if any, the PP/ST author should select the FCS\_CKM.3 component.

For each cryptographic key destruction method implemented by the TOE, if any, the PP/ST author should select the FCS\_CKM.4 component.

For each cryptographic operation (such as digital signature, data encryption, key agreement, secure hash, etc.) performed by the TOE, if any, the PP/ST author should select the FCS\_COP.1 component.

Cryptographic functionality may be used to meet objectives specified in class FCO, and in families FDP\_DAU, FDP\_SDI, FDP\_UCT, FDP\_UTI, FIA\_SOS, FIA\_UAU, to meet a variety of objectives. In the cases where cryptographic functionality is used to meet objectives for other classes, the individual functional components specify the objectives that cryptographic functionality must satisfy. The objectives in class FCS should be used when cryptographic functionality of the TOE is sought by consumers.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## E.1 Cryptographic key management (FCS\_CKM)

### User notes

Cryptographic keys must be managed throughout their lifetime. The typical events in the lifecycle of a cryptographic key include (but are not limited to): generation, distribution, entry, storage, access (e.g. backup, escrow, archive, recovery) and destruction.

As a minimum, cryptographic keys should at least go through the following stages: generation, storage and destruction. The inclusion of other stages is dependent on the key management strategy being implemented, as the TOE need not be involved in all of the key life-cycle (e.g. the TOE may only generate and distribute cryptographic keys).

This family is intended to support the cryptographic key lifecycle and consequently defines requirements for the following activities: cryptographic key generation, cryptographic key distribution, cryptographic key access and cryptographic key destruction. This family should be included whenever there are functional requirements for the management of cryptographic keys.

If FAU\_GEN Security Audit Data Generation is included in the PP/ST then, in the context of the events being audited:

- a) The object attributes may include the assigned user for the cryptographic key, the user role, the cryptographic operation that the cryptographic key is to be used for, the cryptographic key identifier and the cryptographic key validity period.
- b) The object value may include the values of cryptographic key(s) and parameters **excluding** any sensitive information (such as secret or private cryptographic keys).

Typically, random numbers are used to generate cryptographic keys. If this is the case, then FCS\_CKM.1 Cryptographic key generation should be used instead of the component FIA\_SOS.2 TSF Generation of secrets. In cases where random number generation is required for purposes other than for the generation of cryptographic keys, the component FIA\_SOS.2 TSF Generation of secrets should be used.

### FCS\_CKM.1 Cryptographic key generation

#### User application notes

This component requires the cryptographic key sizes and method used to generate cryptographic keys to be specified, this can be in accordance with an assigned standard. It should be used to specify the cryptographic key sizes and the method (e.g. algorithm) used to generate the cryptographic keys. Only one instance of the component is needed for the same method and multiple key sizes. The key size could be common or different for the various entities, and could be either the input to or the output from the method.

## Operations

### Assignment:

**In FCS\_CKM.1.1, the PP/ST author should specify the cryptographic key generation algorithm to be used.**

**In FCS\_CKM.1.1, the PP/ST author should specify the cryptographic key sizes to be used. The key sizes specified should be appropriate for the algorithm and its intended use.**

**In FCS\_CKM.1.1, the PP/ST author should specify the assigned standard that documents the method used to generate cryptographic keys. The assigned standard may comprise none, one or more actual standards publications, for example, from international, national, industry or organisational standards.**

## FCS\_CKM.2 Cryptographic key distribution

### User application notes

This component requires the method used to distribute cryptographic keys to be specified, this can be in accordance with an assigned standard.

## Operations

### Assignment:

**In FCS\_CKM.2.1, the PP/ST author should specify the cryptographic key distribution method to be used.**

**In FCS\_CKM.2.1, the PP/ST author should specify the assigned standard that documents the method used to distribute cryptographic keys. The assigned standard may comprise none, one or more actual standards publications, for example, from international, national, industry or organisational standards.**

## FCS\_CKM.3 Cryptographic key access

### User application notes

This component requires the method used to access cryptographic keys be specified, this can be in accordance with an assigned standard.

## Operations

### Assignment:

**In FCS\_CKM.3.1, the PP/ST author should specify the type of cryptographic key access being used. Examples of types of cryptographic key access include (but are**

not limited to) cryptographic key backup, cryptographic key archival, cryptographic key escrow and cryptographic key recovery.

In FCS\_CKM.3.1, the PP/ST author should specify the cryptographic key access method to be used.

In FCS\_CKM.3.1, the PP/ST author should specify the assigned standard that documents the method used to access cryptographic keys. The assigned standard may comprise none, one or more actual standards publications, for example, from international, national, industry or organisational standards.

#### FCS\_CKM.4 Cryptographic key destruction

##### User application notes

This component requires the method used to destroy cryptographic keys be specified, this can be in accordance with an assigned standard.

##### Operations

###### Assignment:

In FCS\_CKM.4.1, the PP/ST author should specify the key destruction method to be used to destroy cryptographic keys.

In FCS\_CKM.4.1, the PP/ST author should specify the assigned standard that documents the method used to destroy cryptographic keys. The assigned standard may comprise none, one or more actual standards publications, for example, from international, national, industry or organisational standards.

## E.2 Cryptographic operation (FCS\_COP)

### User notes

A cryptographic operation may have cryptographic mode(s) of operation associated with it. If this is the case, then the cryptographic mode(s) must be specified. Examples of cryptographic modes of operation are cipher block chaining, output feedback mode, electronic code book mode, and cipher feedback mode.

Cryptographic operations may be used to support one or more TOE security services. The FCS\_COP component may need to be iterated more than once depending on:

- a) the user application for which the security service is being used.
- b) the use of different cryptographic algorithms and/or cryptographic key sizes.
- c) the type or sensitivity of the data being operated on.

If FAU\_GEN Security audit data generation is included in the PP/ST then, in the context of the cryptographic operation events being audited:

- a) The types of cryptographic operation may include digital signature generation and/or verification, cryptographic checksum generation for integrity and/or for verification of checksum, secure hash (message digest) computation, data encryption and/or decryption, cryptographic key encryption and/or decryption, cryptographic key agreement and random number generation.
- b) The subject attributes may include subject role(s) and user(s) associated with the subject.
- c) The object attributes may include the assigned user for the cryptographic key, user role, cryptographic operation the cryptographic key is to be used for, cryptographic key identifier, and the cryptographic key validity period.

### FCS\_COP.1 Cryptographic operation

#### User application notes

This component requires the cryptographic algorithm and key size used to perform specified cryptographic operation(s) which can be based on an assigned standard.

#### Operations

Assignment:

**In FCS\_COP.1.1, the PP/ST author should specify the cryptographic operations being performed. Typical cryptographic operations include digital signature generation and/or verification, cryptographic checksum generation for integrity and/or for verification of checksum, secure hash (message digest) computation, data encryption and/or decryption, cryptographic key encryption and/or**

decryption, cryptographic key agreement and random number generation. The cryptographic operation may be performed on user data or TSF data.

In FCS\_COP.1.1, the PP/ST author should specify the cryptographic algorithm to be used. Typical cryptographic algorithms include, but are not limited to, DES, RSA and IDEA.

In FCS\_COP.1.1, the PP/ST author should specify the cryptographic key sizes to be used. The key sizes specified should be appropriate for the algorithm and its intended use.

In FCS\_COP.1.1, the PP/ST author should specify the assigned standard that documents how the identified cryptographic operation(s) are performed. The assigned standard may comprise none, one or more actual standards publications, for example, from international, national, industry or organisational standards.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## Annex F (informative)

### User data protection (FDP)

This class contains families specifying requirements for TOE security functions and TOE security function policies related to protecting user data. This class differs from FIA and FPT in that FDP specifies components to protect user data, FIA specifies components to protect attributes associated with the user, and FPT specifies components to protect TSF information.

The class does not contain explicit requirements for traditional Mandatory Access Controls (MAC) or traditional Discretionary Access Controls (DAC); however, such requirements may be constructed using components from this class.

FDP does not explicitly deal with confidentiality, integrity, or availability, as all three are most often intertwined in the policy and mechanisms. However, the TOE security policy must adequately cover these three objectives in the PP/ST.

A final aspect of this class is that it specifies access control in terms of “operations”. An operation is defined as a specific type of access on a specific object. It depends on the level of abstraction of the PP/ST author whether these operations are described as “read” and/or “write” operations, or as more complex operations such as “update the database”.

The access control policies are policies that control access to the information container. The attributes represent attributes of the container. Once the information is out of the container, the accessor is free to modify that information, including writing the information into a different container with different attributes. By contrast, an information flow policies controls access to the information, independent of the container. The attributes of the information, which may be associated with the attributes of the container (or may not, as in the case of a multi-level database) stay with the information as it moves. The accessor does not have the ability, in the absence of an explicit authorisation, to change the attributes of the information.

This class is not meant to be a complete taxonomy of IT access policies, as others can be imagined. Those policies included here are simply those for which current experience with actual systems provides a basis for specifying requirements. There may be other forms of intent that are not captured in the definitions here.

For example, one could imagine a goal of having user-imposed (and user-defined) controls on information flow (e.g. an automated implementation of the NO FOREIGN handling caveat). Such concepts could be handled as refinements of, or extensions to the FDP components.

Finally, it is important when looking at the components in FDP to remember that these components are requirements for functions that may be implemented by a mechanism that also serves or could serve another purpose. For example, it is possible to build an access control policy (FDP\_ACC) that uses labels (FDP\_IFF.1) as the basis of the access control mechanism.

A TOE security policy may encompass many security function policies (SFPs), each to be identified by the two policy oriented components FDP\_ACC, and FDP\_IFC. These policies will typically take confidentiality, integrity, and availability aspects into consideration as required, to satisfy the TOE requirements. Care should be taken to ensure that all objects are covered by at least one SFP and that there are no conflicts arising from implementing the multiple SFPs.

Figures F.1 and F.2 show the decomposition of this class into its constituent components.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

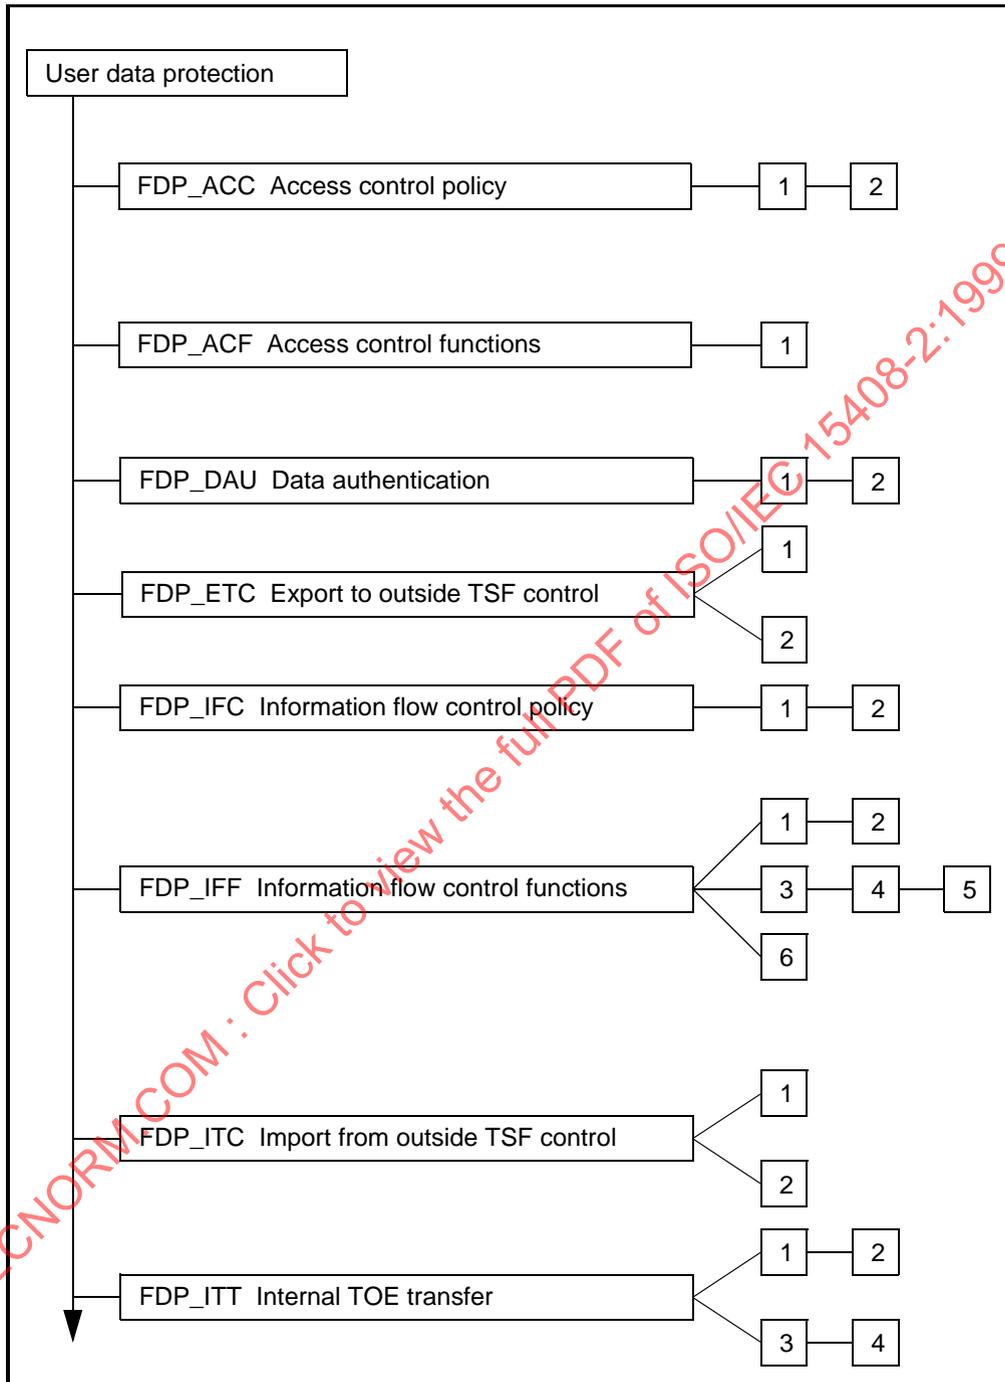


Figure F.1 - User data protection class decomposition

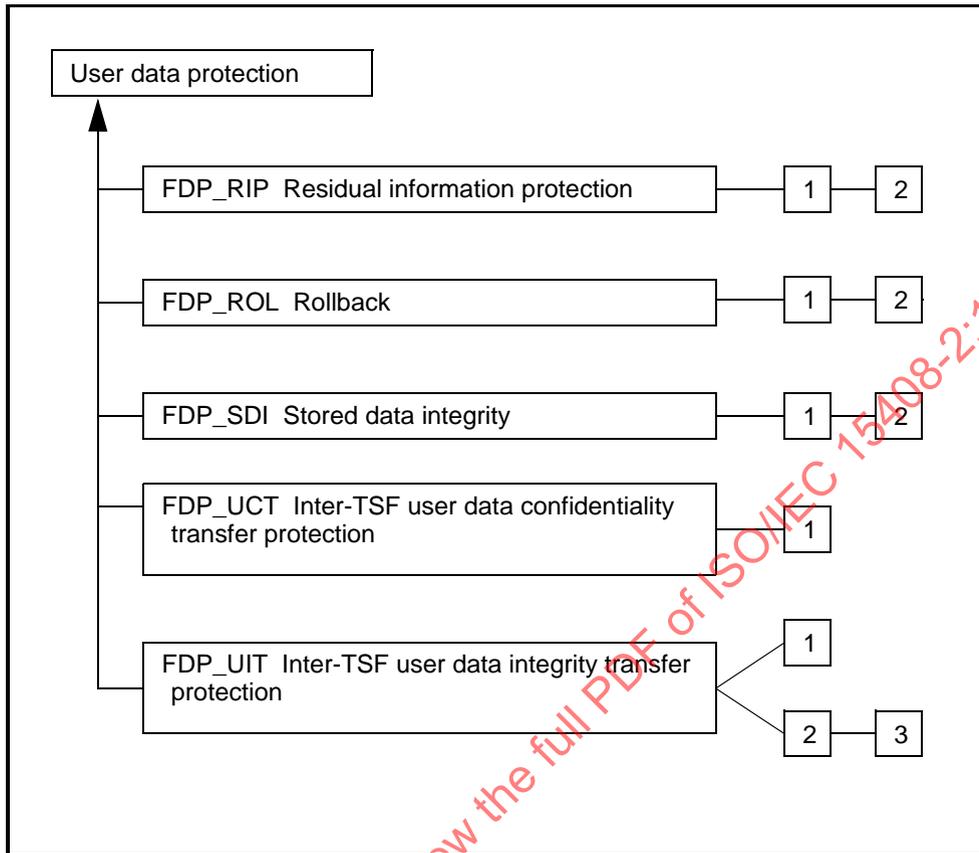


Figure F.2 - User data protection class decomposition (cont.)

When building a PP/ST using components from the FDP class, the following information provides guidance on where to look and what to select from the class.

The requirements in the FDP class are defined in terms of a security function (abbreviated SF) that will implement a SFP. Since a TOE may implement multiple SFPs simultaneously, the PP/ST author must specify the name for each SFP, so it can be referenced in other families. This name will then be used in each component selected to indicate that it is being used as part of the definition of requirements for that function. This allows the author to easily indicate the scope for operations such as objects covered, operations covered, authorised users, etc.

Each instantiation of a component can apply to only one SFP. Therefore if an SFP is specified in a component then this SFP will apply to all the elements in this component. The components may be instantiated multiple times within a PP/ST to account for different policies if so desired.

The key to selecting components from this family is to have a well defined TOE security policy to enable proper selection of the components from the two policy components; FDP\_ACC and FDP\_IFC. In FDP\_ACC and FDP\_IFC respectively, all access control policies and all information flow control policies are named. Furthermore the scope of control of these components in terms of the subjects, objects and operations covered by this security function. The names of these policies

are meant to be used throughout the remainder of the functional components that have an operation that calls for an assignment or selection of an “access control SFP” or an “information flow control SFP”. The rules that define the functionality of the named access control and information flow control SFPs will be defined in the FDP\_ACF and FDP\_IFF families (respectively).

The following steps are guidance on how this class is applied in the construction of a PP/ST:

- a) Identify the policies to be enforced from the FDP\_ACC, and FDP\_IFC families. These families define scope of control for the policy, granularity of control and may identify some rules to go with the policy.
- b) Identify the components and perform any applicable operations in the policy components. The assignment operations may be performed generally (such as with a statement “All files”) or specifically (“The files “A”, “B”, etc.) depending upon the level of detail known.
- c) Identify any applicable function components from the FDP\_ACF and FDP\_IFF families to address the named policy families from FDP\_ACC and FDP\_IFC. Perform the operations to make the components define the rules to be enforced by the named policies. This should make the components fit the requirements of the selected function envisioned or to be built.
- d) Identify who will have the ability to control and change security attributes under the function, such as only a security administrator, only the owner of the object, etc. Select the appropriate components from Class FMT Security management and perform the operations. Refinements may be useful here to identify missing features, such as that some or all changes must be done via trusted path.
- e) Identify any appropriate components from the Class FMT Security management for initial values for new objects and subjects.
- f) Identify any applicable rollback components from the FDP\_ROL family.
- g) Identify any applicable residual information protection requirements from the FDP\_RIP family.
- h) Identify any applicable import or export components, and how security attributes should be handled during import and export, from the FDP\_ITC and FDP\_ETC families.
- i) Identify any applicable internal TOE communication components from the FDP\_ITT family.
- j) Identify any requirements for integrity protection of stored information from the FDP\_SDI.
- k) Identify any applicable inter-TSF communication components from the FDP\_UCT or FDP\_UIT families.

## F.1 Access control policy (FDP\_ACC)

This family is based upon the concept of arbitrary controls on the interaction of subjects and objects. The scope and purpose of the controls is based upon the attributes of the accessor (subject), the attributes of the container being accessed (object), the actions (operations) and any associated access control rules.

### User notes

The components in this family are capable of identifying the access control SFPs (by name) to be enforced by the traditional Discretionary Access Control (DAC) mechanisms. It further defines the subjects, objects and operations that are covered by identified access control SFPs. The rules that define the functionality of an access control SFP will be defined by other families, such as FDP\_ACF and FDP\_RIP. The names of the access control SFPs defined in FCS\_ACC are meant to be used throughout the remainder of the functional components that have an operation that calls for an assignment or selection of an “access control SFP.”

The access control SFP covers a set of triplets: subject, object, and operations. Therefore a subject can be covered by multiple access control SFPs but only with respect to a different operation or a different object. Of course the same applies to objects and operations.

A critical aspect of an access control function that enforces an access control SFP is the ability for users to modify the attributes involved in access control decisions. The FDP\_ACC family does not address these aspects. Some of these requirements are left undefined, but can be added as refinements, while others are covered elsewhere in other families and classes such as FMT Class FMT: Security management.

There are no audit requirements in FCS\_ACC as this family specifies access control SFP requirements. Audit requirements will be found in families specifying functions to satisfy the access control SFPs identified in this family.

This family provides a PP/ST author the capability to specify several policies, for example, a fixed access control SFP to be applied to one scope of control, and a flexible access control SFP to be defined for a different scope of control. To specify more than one access control policy, the components from this family can be iterated multiple times in a PP/ST to different subsets of operations and objects. This will accommodate TOEs that contain multiple policies, each addressing a particular set of operations and objects. In other words, the PP/ST author should specify the required information in the ACC component for each of the access control SFPs that the TSF will enforce. For example, a TOE incorporating three access control SFPs, each covering only a subset of the objects, subjects, and operations within the TOE, will contain one FDP\_ACC.1 Subset access control component for each of the three access control SFPs, necessitating a total of three FDP\_ACC.1 components.

### FDP\_ACC.1 Subset access control

#### User application notes

The terms object and subject refer to generic elements in the TOE. For a policy to be implementable, the entities must be clearly identified. For a PP, the objects and operations might be expressed as types such as: named objects, data repositories, observe accesses, etc. For a

specific system these generic terms (subject, object) must be refined, e.g. files, registers, ports, daemons, open calls, etc.

This component specifies that the policy cover some well-defined set of operations on some subset of the objects. It places no constraints on any operations outside the set – including operations on objects for which other operations are controlled.

## Operations

### Assignment:

**In FDP\_ACC.1.1, the PP/ST author should specify a uniquely named access control SFP to be enforced by the TSF.**

**In FDP\_ACC.1.1, the PP/ST author should specify the list of subjects, objects, and operations among subjects and objects covered by the SFP.**

## FDP\_ACC.2 Complete access control

### User application notes

This component requires that all possible operations on objects, that are included in the SFP, are covered by an access control SFP.

The PP/ST author must demonstrate that each combination of objects and subjects is covered by an access control SFP.

## Operations

### Assignment:

**In FDP\_ACC.2.1, the PP/ST author should specify a uniquely named access control SFP to be enforced by the TSF.**

**In FDP\_ACC.2.1, the PP/ST author should specify the list of subjects and objects covered by the SFP. All operations among those subjects and objects will be covered by the SFP.**

## F.2 Access control functions (FDP\_ACF)

This family describes the rules for the specific functions that can implement an access control policy named in FDP\_ACC which also specifies the scope of control of the policy.

### User notes

This family provides a PP/ST author the capability to describe the rules for access control. This results in a system where the access to objects will not change. An example of such an object is "Message of the Day", which is readable by all, and changeable only by the authorised administrator. This family also provides the PP/ST author with the ability to describe rules that provide for exceptions to the general access control rules. Such exceptions would either explicitly allow or deny authorisation to access an object.

There are no explicit components to specify other possible functions such as two-person control, sequence rules for operations, or exclusion controls. However, these mechanisms, as well as traditional DAC mechanisms, can be represented with the existing components, by careful drafting of the access control rules.

A variety of acceptable access control SFs may be specified in this family such as:

- Access control lists (ACLs)
- Time-based access control specifications
- Origin-based access control specifications
- Owner-controlled access control attributes

### FDP\_ACF.1 Security attribute based access control

#### User application notes

This component provides requirements for a mechanism that mediates access control based on security attributes associated with subjects and objects. Each object and subject has a set of associated attributes, such as location, time of creation, access rights (e.g., Access Control Lists (ACLs)). This component allows the PP/ST author to specify the attributes that will be used for the access control mediation. This component allows access control rules, using these attributes, to be specified.

Examples of the attributes that a PP/ST author might assign are presented in the following paragraphs.

An *identity attribute* may be associated with users, subjects, or objects to be used for mediation. Examples of such attributes might be the name of the program image used in the creation of the subject, or a security attribute assigned to the program image.

A *time attribute* can be used to specify that access will be authorised during certain times of the day, during certain days of the week, or during a certain calendar year.

A *location attribute* could specify whether the location is the location of the request for the operation, the location where the operation will be carried out, or both. It could be based upon internal tables to translate the logical interfaces of the TSF into locations such as through terminal locations, CPU locations, etc.

A *grouping attribute* allows a single group of users to be associated with an operation for the purposes of access control. If required, the refinement operation should be used to specify the maximum number of definable groups, the maximum membership of a group, and the maximum number of groups to which a user can concurrently be associated.

This component also provides requirements for the access control security functions to be able to explicitly authorise or deny access to an object based upon security attributes. This could be used to provide privilege, access rights, or access authorisations within the TOE. Such privileges, rights, or authorisations could apply to users, subjects (representing users or applications), and objects.

## Operations

### Assignment:

**In FDP\_ACF.1.1, the PP/ST author should specify an access control SFP name that the TSF is to enforce. The name of the access control SFP, and the scope of control for that policy are defined in components from FDP\_ACC.**

**In FDP\_ACF.1.1, the PP/ST author should specify the security attributes and/or named groups of security attributes that the function will use in the specification of the rules. For example, such attributes may be things such as the user identity, subject identity, role, time of day, location, ACLs, or any other attribute specified by the PP/ST author. Named groups of security attributes can be specified to provide a convenient means to refer to multiple security attributes. Named groups could provide a useful way to associate “roles” defined in FMT\_SMR Security management roles, and all of their relevant attributes, with subjects. In other words, each role could relate to a named group of attributes.**

**In FDP\_ACF.1.2, the PP/ST author should specify the SFP rules governing access among controlled subjects and controlled objects using controlled operations on controlled objects. These rules specify when access is granted or denied. It can specify general access control functions (e.g. typical permission bits) or granular access control functions (e.g. ACLs).**

**In FDP\_ACF.1.3, the PP/ST author should specify the rules, based on security attributes, that explicitly authorise access of subjects to objects that will be used to explicitly authorise access. These rules are in addition to those specified in FDP\_ACF.1.1. They are included in FDP\_ACF.1.3 as they are intended to contain exceptions to the rules in FDP\_ACF.1.1. An example of rules to explicitly authorise access is based on a privilege vector associated with a subject that always grants access to objects covered by the access control SFP that has been specified. If such a capability is not desired, then the PP/ST author should specify “none”.**

**In FDP\_ACF.1.4, the PP/ST author should specify the rules, based on security attributes, that explicitly deny access of subjects to objects. These rules are in addition to those specified in FDP\_ACF.1.1. They are included in FDP\_ACF.1.4 as they are intended to contain exceptions to the rules in FDP\_ACF.1.1. An example of rules to explicitly deny access is based on a privilege vector associated with a subject that always denies access to objects covered by the access control**

**SFP that has been specified. If such a capability is not desired, then the PP/ST author should specify “none”.**

[IECNORM.COM](http://IECNORM.COM) : Click to view the full PDF of ISO/IEC 15408-2:1999

### F.3 Data authentication (FDP\_DAU)

This family describes specific functions that can be used to authenticate ‘static’ data.

#### User notes

Components in this family are to be used when there is a requirement for ‘static’ data authentication, i.e. where data is to be signed but not transmitted. (Note that the FCO\_NRO family provides for non-repudiation of origin of information received during a data exchange.)

#### FDP\_DAU.1 Basic data authentication

##### User application notes

This component may be satisfied by one-way hash functions (cryptographic checksum, fingerprint, message digest), to generate a hash value for a definitive document that may be used as verification of the validity or authenticity of its information content.

##### Operations

###### Assignment:

**In FDP\_DAU.1.1, the PP/ST author should specify the list of objects or information types for which the TSF shall be capable of generating data authentication evidence.**

**In FDP\_DAU.1.2, the PP/ST author should specify the list of subjects that will have the ability to verify data authentication evidence for the objects identified in the previous element. The list of subjects could be very specific, if the subjects are known, or it could be more generic and refer to a “type” of subject such as an identified role.**

#### FDP\_DAU.2 Data authentication with identity of guarantor

##### User application notes

This component additionally requires the ability to verify the identity of the user that provided the guarantee of authenticity (e.g. a trusted third party).

##### Operations

###### Assignment:

**In FDP\_DAU.2.1, the PP/ST author should specify the list of objects or information types for which the TSF shall be capable of generating data authentication evidence.**

**In FDP\_DAU.2.2, the PP/ST author should specify the list of subjects that will have the ability to verify data authentication evidence for the objects identified in the**

previous element as well as the identity of the user that created the data authentication evidence.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## F.4 Export to outside TSF control (FDP\_ETC)

This family defines functions for exporting user data from the TOE such that its security attributes either can be explicitly preserved or can be ignored once it has been exported. Consistency of these security attributes are addressed by FPT\_TDC Inter-TSF TSF data consistency.

FDP\_ETC is concerned with limitations on export and association of security attributes with the exported user data.

### User notes

This family, and the corresponding Import family FDP\_ITC, address how the TOE deals with user data transferred into and outside its control. In principle this family is concerned with the export of user data and its related security attributes.

A variety of activities might be involved here:

- a) exporting of user data without any security attributes;
- b) exporting user data including security attributes where the two are associated with one another and the security attributes unambiguously represent the exported user data.

If there are multiple SFPs (access control and/or information flow control) then it may be appropriate to iterate these components once for each named SFP.

### FDP\_ETC.1 Export of user data without security attributes

#### User application notes

This component is used to specify the export of user data without the export of its security attributes.

#### Operations

##### Assignment:

**In FDP\_ETC.1.1, the PP/ST author should specify the access control SFP(s) and/or information flow control SFP(s) that will be enforced when exporting user data. The user data that this function exports is scoped by the assignment of these SFPs.**

### FDP\_ETC.2 Export of user data with security attributes

#### User application notes

The user data is exported together with its security attributes. The security attributes are unambiguously associated with the user data. There are several ways of achieving this association. One way that this can be achieved is by physically collocating the user data and the security attributes (e.g. the same floppy), or by using cryptographic techniques such as secure signatures to associate the attributes and the user data. FDP\_ITC Inter-TSF trusted channel could be used to

assure that the attributes are correctly received at the other trusted IT product while FPT\_TDC Inter-TSF TSF data consistency can be used to make sure that those attributes are properly interpreted. Furthermore, FTP\_TRP Trusted path could be used to make sure that the export is being initiated by the proper user.

## Operations

### Assignment:

**In FDP\_ETC.2.1, the PP/ST author should specify the access control SFP(s) and/or information flow control SFP(s) that will be enforced when exporting user data. The user data that this function exports is scoped by the assignment of these SFPs.**

**In FDP\_ETC.2.4, the PP/ST author should specify any additional exportation control rules or “none” if there are no additional exportation control rules. These rules will be enforced by the TSF in addition to the access control SFPs and/or information flow control SFPs selected in FDP\_ETC.2.1.**

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## F.5 Information flow control policy (FDP\_IFC)

This family covers the identification of information flow control SFPs; and, for each, specifies the scope of control of the SFP.

Examples of security policies that might satisfy this objective are:

- Bell and La Padula Security model [B&L];
- Biba Integrity model [Biba];
- Non-Interference [Gogu1,Gogu2].

### User notes

The components in this family are capable of identifying the information flow control SFPs to be enforced by the traditional Mandatory Access Control mechanisms that would be found in a TOE. However, they go beyond just the traditional MAC mechanisms and can be used to identify and describe non-interference policies and state-transitions. It further defines the subjects under control of the policy, the information under control of the policy, and operations which cause controlled information to flow to and from controlled subjects for each information flow control SFP in the TOE. The functionality that defines the rules of an information flow control SFP will be defined by other families such as FDP\_IFF and FDP\_RIP. The access control SFPs named here in FDP\_IFC are meant to be used throughout the remainder of the functional components that have an operation that calls for an assignment or selection of an “information flow control SFP.”

These components are quite flexible. They allow the domain of flow control to be specified and there is no requirement that the mechanism be based upon labels. The different elements of the information flow control components also permit different degrees of exception to the policy.

Each SFP covers a set of triplets: subject, information, and operations that cause information to flow to and from subjects. Some information flow control policies may be at a very low level of detail and explicitly describe subjects in terms of processes within an operating system. Other information flow control policies may be at a high level and describe subjects in the generic sense of users or input/output channels. If the information flow control policy is at too high a level of detail, it may not clearly define the desired IT security functions. In such cases, it is more appropriate to include such descriptions of information flow control policies as objectives. Then the desired IT security functions can be specified as supportive of those objectives.

In the second component (FDP\_IFC.2 Complete information flow control), each information flow control SFP will cover all possible operations that cause information covered by that SFP to flow to and from subjects covered by that SFP. Furthermore, all information flows will need to be covered by a SFP. Therefore for each action that causes information to flow, there will be a set of rules that define whether the action is allowed. If there are multiple SFPs that are applicable for a given information flow, all involved SFPs must allow this flow before it is permitted to take place.

An information flow control SFP covers a well-defined set of operations. The SFPs coverage may be “complete” with respect to some information flows, or it may address only some of the operations that affect the information flow.

An access control SFP controls access to the objects that contain information. An information flow control SFP controls access to the information, independent of its container. The attributes of the information, which may be associated with the attributes of the container (or may not, as in the case

of a multi-level database) stay with the information as it flows. The accessor does not have the ability, in the absence of an explicit authorisation, to change the attributes of the information.

Information flows and operations can be expressed at multiple levels. In the case of a ST, the information flows and operations might be specified at a system-specific level: TCP/IP packets flowing through a firewall based upon known IP addresses. For a PP, the information flows and operations might be expressed as types: email, data repositories, observe accesses, etc.

The components in this family can be applied multiple times in a PP/ST to different subsets of operations and objects. This will accommodate TOEs that contain multiple policies, each addressing a particular set of objects, subjects, and operations.

### **FDP\_IFC.1 Subset information flow control**

#### User application notes

This component requires that an information flow control policy apply to a subset of the possible operations in the TOE.

#### Operations

##### Assignment:

**In FDP\_IFC.1.1, the PP/ST author should specify a uniquely named information flow control SFP to be enforced by the TSF.**

**In FDP\_IFC.1.1, the PP/ST author should specify the list of subjects, information, and operations which cause controlled information to flow to and from controlled subjects covered by the SFP. As mentioned above, the list of subjects could be at various levels of detail depending on the needs of the PP/ST author. It could specify users, machines, or processes for example. Information could refer to data such as email or network protocols, or more specific objects similar to those specified under an access control policy. If the information that is specified is contained within an object that is subject to an access control policy, then both the access control policy and information flow control policy must be enforced before the specified information could flow to or from the object.**

### **FDP\_IFC.2 Complete information flow control**

#### User application notes

This component requires that all possible operations that cause information to flow to and from subjects included in the SFP, are covered by an information flow control SFP.

The PP/ST author must demonstrate that each combination of information flows and subjects is covered by an information flow control SFP.

## Operations

### Assignment:

In FDP\_IFC.2.1, the PP/ST author should specify a uniquely named information flow control SFP to be enforced by the TSF.

**In FDP\_IFC.2.1, the PP/ST author should specify the list of subjects and information that will be covered by the SFP. All operations that cause that information to flow to and from subjects will be covered by the SFP.** As mentioned above, the list of subjects could be at various levels of detail depending on the needs of the PP/ST author. It could specify users, machines, or processes for example. Information could refer to data such as email or network protocols, or more specific objects similar to those specified under an access control policy. If the information that is specified is contained within an object that is subject to an access control policy, then both the access control policy and information flow control policy must be enforced before the specified information could flow to or from the object.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## F.6 Information flow control functions (FDP\_IFF)

This family describes the rules for the specific functions that can implement the information flow control SFPs named in FDP\_IFC, which also specifies the scope of control of the policies. It consists of two “trees:” one addressing the common information flow control function issues, and a second addressing illicit information flows (i.e. covert channels) with respect to one or more information flow control SFPs. This division arises because the issues concerning illicit information flows are, in some sense, orthogonal to the rest of an SFP. Illicit information flows are flows in violation of policy; thus they are not a policy issue.

### User notes

In order to implement strong protection against disclosure or modification in the face of untrusted software, controls on information flow are required. Access controls alone are not sufficient because they only control access to containers, allowing the information they contain to flow, without controls, throughout a system.

In this family, the phrase “types of illicit information flows” is used. This phrase may be used to refer to the categorisation of flows as “Storage Channels” or “Timing Channels”, or it can refer to improved categorisations reflective of the needs of a PP/ST author.

The flexibility of these components allows the definition of a privilege policy within FDP\_IFF.1 and FDP\_IFF.2 to allow the controlled bypass of all or part of a particular SFP. If there is a need for a predefined approach to SFP bypass, the PP/ST author should consider incorporating a privilege policy.

### FDP\_IFF.1 Simple security attributes

#### User application notes

This component requires security attributes on information, and on subjects that cause that information to flow and subjects that act as recipients of that information. The attributes of the containers of the information should also be considered if it is desired that they should play a part in information flow control decisions or if they are covered by an access control policy. This component specifies the key rules that are enforced, and describes how security attributes are derived. For example, this component should be used when at least one of the information flow control SFPs in the TSP is based on labels as defined in the Bell and LaPadula security policy model [B&L], but these security attributes do not form a hierarchy.

This component does not specify the details of how a security attribute is assigned (i.e. user versus process). Flexibility in policy is provided by having assignments that allow specification of additional policy and function requirements, as necessary.

This component also provides requirements for the information flow control functions to be able to explicitly authorise and deny an information flow based upon security attributes. This could be used to implement a privilege policy that covers exceptions to the basic policy defined in this component.

## Operations

## Assignment:

**In FDP\_IFF.1.1, the PP/ST author should specify the information flow control SFPs enforced by the TSF. The name of the information flow control SFP, and the scope of control for that policy are defined in components from FDP\_IFC.**

**In FDP\_IFF.1.1 the PP/ST author should specify the minimum number and type of security attributes that the function will use in the specification of the rules. For example, such attributes may be things such as subject identifier, subject sensitivity level, subject clearance level, information sensitivity level, etc. The minimum number of each type of security attribute should be sufficient to support the environmental needs.**

**In FDP\_IFF.1.2 the PP/ST author should specify for each operation, the security attribute-based relationship that must hold between subject and information security attributes that the TSF will enforce.**

**In FDP\_IFF.1.3 the PP/ST author should specify any additional information flow control SFP rules that the TSF is to enforce. If there are no additional rules then the PP/ST author should specify “none”.**

**In FDP\_IFF.1.4 the PP/ST author should specify any additional SFP capabilities that the TSF is to provide. If there are no additional capabilities then the PP/ST author should specify “none”.**

**In FDP\_IFF.1.5, the PP/ST author should specify the rules, based on security attributes, that explicitly authorise information flows. These rules are in addition to those specified in the preceding elements. They are included in FDP\_IFF.1.5 as they are intended to contain exceptions to the rules in the preceding elements. An example of rules to explicitly authorise information flows is based on a privilege vector associated with a subject that always grants the subject the ability to cause an information flow for information that is covered by the SFP that has been specified. If such a capability is not desired, then the PP/ST author should specify “none”.**

**In FDP\_IFF.1.6, the PP/ST author should specify the rules, based on security attributes, that explicitly deny information flows. These rules are in addition to those specified in the preceding elements. They are included in FDP\_IFF.1.6 as they are intended to contain exceptions to the rules in the preceding elements. An example of rules to explicitly authorise information flows is based on a privilege vector associated with a subject that always denies the subject the ability to cause an information flow for information that is covered by the SFP that has been specified. If such a capability is not desired, then the PP/ST author should specify “none”.**

## FDP\_IFF.2 Hierarchical security attributes

### User application notes

This component requires that all information flow control SFPs in the TSP use hierarchical security attributes that form a lattice.

For example, it should be used when at least one of the information flow control SFPs in the TSP is based on labels as defined in the Bell and LaPadula security policy model [B&L] and form a hierarchy.

It is important to note that the hierarchical relationship requirements identified in FDP\_IFF.2.5 need only apply to the information flow control security attributes for the information flow control SFPs that have been identified in FDP\_IFF.2.1. This component is not meant to apply to other SFPs such as access control SFPs.

Like the preceding component, this component could also be used to implement a privilege policy that covers rules that allow for the explicit authorisation or denial of information flows.

If it is the case that multiple information flow control SFPs are to be specified, and that each of these SFPs will have their own security attributes that are not related to one another, then the PP/ST author should iterate this component once for each of those SFPs. Otherwise a conflict might arise with the sub-items of FDP\_IFF.2.5 since the required relationships will not exist.

### Operations

#### Assignment:

In FDP\_IFF.2.1, the PP/ST author should specify the information flow control SFPs enforced by the TSP. The name of the information flow control SFP, and the scope of control for that policy are defined in components from FDP\_IFC.

In FDP\_IFF.2.1 the PP/ST author should specify the minimum number and type of security attributes that the function will use in the specification of the rules. For example, such attributes may be things such as subject identifier, subject sensitivity level, subject clearance level, information sensitivity level, etc. The minimum number of each type of security attribute should be sufficient to support the environmental needs.

In FDP\_IFF.2.2 the PP/ST author should specify for each operation, the security attribute-based relationship that must hold between subject and information security

attributes that the TSF will enforce. **These relationships should be based upon the ordering relationships between the security attributes.**

In FDP\_IFF.2.3 the PP/ST author should specify any additional information flow control SFP rules that the TSF is to enforce. If there are no additional rules then the PP/ST author should specify “none”.

In FDP\_IFF.2.4 the PP/ST author should specify any additional SFP capabilities that the TSF is to enforce. If there are no additional rules then the PP/ST author should specify “none”.

In FDP\_IFF.2.5, the PP/ST author should specify the rules, based on security attributes, that explicitly authorise information flows. These rules are in addition to those specified in the preceding elements. They are included in FDP\_IFF.2.5 as they are intended to contain exceptions to the rules in the preceding elements. An example of rules to explicitly authorise information flows is based on a privilege vector associated with a subject that always grants the subject the ability to cause an information flow for information that is covered by the SFP that has been specified. If such a capability is not desired, then the PP/ST author should specify “none”.

In FDP\_IFF.2.6, the PP/ST author should specify the rules, based on security attributes, that explicitly deny information flows. These rules are in addition to those specified in the preceding elements. They are included in FDP\_IFF.2.6 as they are intended to contain exceptions to the rules in the preceding elements. An example of rules to explicitly authorise information flows is based on a privilege vector associated with a subject that always denies the subject the ability to cause an information flow for information that is covered by the SFP that has been specified. If such a capability is not desired, then the PP/ST author should specify “none”.

### **FDP\_IFF.3 Limited illicit information flows**

#### **User application notes**

This component should be used when at least one of the SFPs that requires control of illicit information flows does not require elimination of flows.

For the specified illicit information flows, certain maximum capacities should be provided. In addition a PP/ST author has the ability to specify whether the illicit information flows must be audited.

## Operations

### Assignment:

**In FDP\_IFF.3.1 the PP/ST author should specify the information flow control SFPs enforced by the TSF. The name of the information flow control SFP, and the scope of control for that policy are defined in components from FDP\_IFC.**

**In FDP\_IFF.3.1 the PP/ST author should specify the types of illicit information flows that are subject to a maximum capacity limitation.**

**In FDP\_IFF.3.1 the PP/ST author should specify the maximum capacity permitted for any identified illicit information flows.**

## FDP\_IFF.4 Partial elimination of illicit information flows

### User application notes

This component should be used when all the SFPs that requires control of illicit information flows require elimination of some (but not necessarily all) illicit information flows.

## Operations

### Assignment:

**In FDP\_IFF.4.1 the PP/ST author should specify the information flow control SFPs enforced by the TSF. The name of the information flow control SFP, and the scope of control for that policy are defined in components from FDP\_IFC.**

**In FDP\_IFF.4.1 the PP/ST author should specify the types of illicit information flows which are subject to a maximum capacity limitation.**

**In FDP\_IFF.4.1 the PP/ST author should specify the maximum capacity permitted for any identified illicit information flows.**

**In FDP\_IFF.4.2 the PP/ST author should specify the types of illicit information flows to be eliminated. This list may not be empty as this component requires that some illicit information flows are to be eliminated.**

## FDP\_IFF.5 No illicit information flows

### User application notes

This component should be used when the SFPs that require control of illicit information flows require elimination of all illicit information flows. However, the PP/ST author should carefully consider the potential impact that eliminating all illicit information flows might have on the normal functional operation of the TOE. Many practical applications have shown that there is an indirect relationship between illicit information flows and normal functionality within a TOE and eliminating all illicit information flows may result in less than desired functionality.

## Operations

### Assignment:

**In FDP\_IFF.5.1 the PP/ST author should specify the information flow control SFP for which illicit information flows are to be eliminated. The name of the information flow control SFP, and the scope of control for that policy are defined in components from FDP\_IFC.**

## FDP\_IFF.6 Illicit information flow monitoring

### User application notes

This component should be used when it is desired that the TSF provide the ability to monitor the use of illicit information flows that exceed a specified capacity. If it is desired that such flows be audited, then this component could serve as the source of audit events to be used by components from the FAU\_GEN Security audit data generation family.

## Operations

### Assignment:

**In FDP\_IFF.6.1 the PP/ST author should specify the information flow control SFPs enforced by the TSF. The name of the information flow control SFP, and the scope of control for that policy are defined in components from FDP\_IFC.**

**In FDP\_IFF.6.1 the PP/ST author should specify the types of illicit information flows that will be monitored for exceeding a maximum capacity.**

**In FDP\_IFF.6.1 the PP/ST author should specify the maximum capacity above which illicit information flows will be monitored by the TSF.**

## F.7 Import from outside TSF control (FDP\_ITC)

This family defines mechanisms for importing user data from outside the TSC into the TOE such that the user data security attributes can be preserved. Consistency of these security attributes are addressed by FPT\_TDC Inter-TSF TSF data consistency.

FDP\_ITC is concerned with limitations on import, user specification of security attributes, and association of security attributes with the user data.

### User notes

This family, and the corresponding export family FDP\_ETC, address how the TOE deals with user data outside its control. This family is concerned with assigning and abstraction of the user data security attributes.

A variety of activities might be involved here:

- a) importing user data from an unformatted medium (e.g. floppy disk, tape, scanner, video or audit signal), without including any security attributes, and physically marking the medium to indicate its contents;
- b) importing user data, including security attributes, from a medium and verifying that the object security attributes are appropriate;
- c) importing user data, including security attributes, from a medium using a cryptographic sealing technique to protect the association of user data and security attributes.

This family is not concerned with the determination of whether the user data may be imported. It is concerned with the values of the security attributes to associate with the imported user data.

There are two possibilities for the import of user data: either the user data is unambiguously associated with reliable object security attributes (values and meaning of the security attributes is not modified), or no reliable security attributes (or no security attributes at all) are available from the import source. This family addresses both cases.

If there are reliable security attributes available, they may have been associated with the user data by physical means (the security attributes are on the same media), or by logical means (the security attributes are distributed differently, but include unique object identification, e.g. cryptographic checksum).

This family is concerned with importing user data and maintaining the association of security attributes as required by the SFP. Other families are concerned with other import aspects such as consistency, trusted channels, and integrity that are beyond the scope of this family. Furthermore, FDP\_ITC is only concerned with the interface to the import medium. FDP\_ETC is responsible for the other end point of the medium (the source).

Some of the well known import requirements are:

- a) importing of user data without any security attributes;

- b) importing of user data including security attributes where the two are associated with one another and the security attributes unambiguously represent the information being imported.

These import requirements may be handled by the TSF with or without human intervention, depending on the IT limitations and the organisational security policy. For example, if user data is received on a “confidential” channel, the security attributes of the objects will be set to “confidential”.

If there are multiple SFPs (access control and/or information flow control) then it may be appropriate to iterate these components once for each named SFP.

### **FDP\_ITC.1 Import of user data without security attributes**

#### **User application notes**

This component is used to specify the import of user data that does not have reliable (or any) security attributes associated with it. This function requires that the security attributes for the imported user data be initialised within the TSF. It could also be the case that the PP/ST author specifies the rules for import. It may be appropriate, in some environments, to require that these attributes be supplied via a trusted path or a trusted channel mechanism.

#### **Operations**

##### **Assignment:**

**In FDP\_ITC.1.1, the PP/ST author should specify the access control SFP and/or information flow control SFP that will be enforced when importing user data from outside of the TSC. The user data that this function imports is scoped by the assignment of these SFPs.**

**In FDP\_ITC.1.3, the PP/ST author should specify any additional importation control rules or “none” if there are no additional importation control rules. These rules will be enforced by the TSF in addition to the access control SFPs and/or information flow control SFPs selected in FDP\_ITC.1.1.**

### **FDP\_ITC.2 Import of user data with security attributes**

#### **User application notes**

This component is used to specify the import of user data that has reliable security attributes associated with it. This function relies upon the security attributes that are accurately and unambiguously associated with the objects on the import medium. Once imported, those objects will have those same attributes. This requires FPT\_TDC to ensure the consistency of the data. It could also be the case that the PP/ST author specifies the rules for import.

## Operations

## Assignment:

**In FDP\_ITC.2.1, the PP/ST author should specify the access control SFP and/or information flow control SFP that will be enforced when importing user data from outside of the TSC. The user data that this function imports is scoped by the assignment of these SFPs**

**In FDP\_ITC.2.5, the PP/ST author should specify any additional importation control rules or “none” if there are no additional importation control rules. These rules will be enforced by the TSF in addition to the access control SFPs and/or information flow control SFPs selected in FDP\_ITC.2.1.**

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## F.8 Internal TOE transfer (FDP\_ITT)

This family provides requirements that address protection of user data when it is transferred between parts of a TOE across an internal channel. This may be contrasted with the FDP\_UCT and FDP\_UIT family, which provide protection for user data when it is transferred between distinct TSFs across an external channel, and FDP\_ETC and FDP\_ITC, which address transfer of data to or from outside the TSF's Control.

### User notes

The requirements in this family allow a PP/ST author to specify the desired security for user data while in transit within the TOE. This security could be protection against disclosure, modification, or loss of availability.

The determination of the degree of physical separation above which this family should apply depends on the intended environment of use. In a hostile environment, there may be risks arising from transfers between parts of the TOE separated by only a system bus. In more benign environments, the transfers may be across more traditional network media.

If there are multiple SFPs (access control and/or information flow control) then it may be appropriate to iterate these components once for each named SFP.

### FDP\_ITT.1 Basic internal transfer protection

#### Operations

Assignment:

**In FDP\_ITT.1.1, the PP/ST author should specify the access control SFP(s) and/or information flow control SFP(s) covering the information being transferred.**

Selection:

**In FDP\_ITT.1.1 the PP/ST author should specify the types of transmission errors that the TSF should prevent occurring for user data while in transport. The options are disclosure, modification, loss of use.**

### FDP\_ITT.2 Transmission separation by attribute

#### User application notes

This component could, for example, be used to provide different forms of protection to information with different clearance levels.

One of the ways to achieve separation of data when it is transmitted is through the use of separate logical or physical channels.

## Operations

### Assignment:

In FDP\_ITT.2.1, the PP/ST author should specify the access control SFP(s) and/or information flow control SFP(s) covering the information being transferred.

### Selection:

In FDP\_ITT.2.1 the PP/ST author should specify the types of transmission errors that the TSF should prevent occurring for user data while in transport. The options are disclosure, modification, loss of use.

### Assignment:

**In FDP\_ITT.2.2, the PP/ST author should specify the security attributes, the values of which the TSF will use to determine when to separate data that is being transmitted between physically-separated parts of the TOE. An example is that user data associated with the identity of one owner is transmitted separately from the user data associated with the identity of a different owner. In this case, the value of the identity of the owner of the data is what is used to determine when to separate the data for transmission.**

## FDP\_ITT.3 Integrity monitoring

### User application notes

This component is used in combination with either FDP\_ITT.1 or FDP\_ITT.2. It ensures that the TSF checks received user data (and their attributes) for integrity. FDP\_ITT.1 or FDP\_ITT.2 will provide the data in a manner such that it is protected from modification (so that FDP\_ITT.3 can detect any modifications).

The PP/ST author has to specify the types of errors that must be detected. The PP/ST author should consider: modification of data, substitution of data, unrecoverable ordering change of data, replay of data, incomplete data, in addition to other integrity errors.

The PP/ST author must specify the actions that the TSF should take on detection of a failure. For example: ignore the user data, request the data again, inform the authorised administrator, reroute traffic for other lines.

## Operations

### Assignment:

**In FDP\_ITT.3.1, the PP/ST author should specify the access control SFP(s) and/or information flow control SFP(s) covering the information being transferred and monitored for integrity errors.**

**In FDP\_ITT.3.1, the PP/ST author should specify the type of possible integrity errors to be monitored during transmission of the user data.**

**In FDP\_ITT.3.2, the PP/ST author should specify the action to be taken by the TSF when an integrity error is encountered. An example might be that the TSF should request the resubmission of the user data. The SFP(s) specified in FDP\_ITT.3.1 will be enforced as the actions are taken by the TSF.**

### **FDP\_ITT.4 Attribute-based integrity monitoring**

This component is used in combination with FDP\_ITT.2. It ensures that the TSF checks received user data, that has been transmitted by separate channels (based on values of specified security attributes), for integrity. It allows the PP/ST author to specify actions to be taken upon detection of an integrity error.

For example, this component could be used to provide different integrity error detection and action for information at different integrity levels.

The PP/ST author has to specify the types of errors that must be detected. The PP/ST author should consider: modification of data, substitution of data, unrecoverable ordering change of data, replay of data, incomplete data, in addition to other integrity errors.

The PP/ST author should specify the attributes (and associated transmission channels) that necessitate integrity error monitoring

The PP/ST author must specify the actions that the TSF should take on detection of a failure. For example: ignore the user data, request the data again, inform the authorised administrator, reroute traffic for other lines.

## Operations

### Assignment:

**In FDP\_ITT.4.1, the PP/ST author should specify the access control SFP(s) and/or information flow control SFP(s) covering the information being transferred and monitored for integrity errors.**

**In FDP\_ITT.4.1, the PP/ST author should specify the type of possible integrity errors to be monitored during transmission of the user data.**

**In FDP\_ITT.4.1, the PP/ST author should specify a list of security attributes that require separate transmission channels. This list is used to determine which user data to monitor for integrity errors., based on its security attributes and its**

**transmission channel. This element is directly related to FDP\_ITT.2 Transmission separation by attribute.**

In FDP\_ITT.4.2, the PP/ST author should specify the action to be taken by the TSF when an integrity error is encountered. An example might be that the TSF should request the resubmission of the user data. The SFP(s) specified in FDP\_ITT.3.1 will be enforced as the actions are taken by the TSF.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## F.9 Residual information protection (FDP\_RIP)

This family addresses the need to ensure that deleted information is no longer accessible, and that newly-created objects do not contain information from previously used objects within the TOE. This family does not address objects stored off-line.

### User notes

This family requires protection for information that has been logically deleted or released (not available to the user but still within the system and may be recoverable). In particular, this includes information that is contained in an object, as part of the TSF reusable resources, where destruction of the object does not necessarily equate to destruction of the resource or any contents of the resource.

It also applies to resources that are serially reused by different subjects within the system. For example, most operating systems typically rely upon hardware registers (resources) to support processes within the system. As processes are swapped from a “run” state to a “sleep” state (and vice versa), these registers are serially reused by different subjects. While this “swapping” action may not be considered an allocation or deallocation of a resource, FDP\_RIP could apply to such events and resources.

FDP\_RIP typically controls access to information that is not part of any currently defined or accessible object; however, in certain cases this may not be true. For example, object “A” is a file and object “B” is the disk upon which that file resides. If object “A” is deleted, the information from object “A” is under the control of FDP\_RIP even though it is still part of object “B”.

It is important to note that FDP\_RIP applies only to on-line objects and not off-line objects such as those backed-up on tapes. For example, if a file is deleted in the TOE, FDP\_RIP can be instantiated to require that no residual information exists upon deallocation; however, the TSF cannot extend this enforcement to that same file that exists on the off-line back-up. Therefore that same file is still available. If this is a concern, then the PP/ST author should make sure that the proper environmental objectives are in place to support administrative guidance to address off-line objects.

FDP\_RIP and FDP\_ROL can conflict when FDP\_RIP is instantiated to require that residual information be cleared at the time the application releases the object to the TSF (i.e. upon deallocation). Therefore, the FDP\_RIP selection of “deallocation” should not be used with FDP\_ROL since there would be no information to roll back. The other selection, “unavailability upon allocation”, may be used with FDP\_ROL, but there is the risk that the resource which held the information has been allocated to a new object before the roll back took place. If that were to occur, then the roll back would not be possible.

There are no audit requirements in FDP\_RIP because this is not a user-invokable function. Auditing of allocated or deallocated resources would be auditable as part of the access control SFP or the information flow control SFP operations.

This family should apply to the objects specified in the access control SFP(s) or the information flow control SFP(s) as specified by the PP/ST author.

**FDP\_RIP.1 Subset residual information protection**

## User application notes

This component requires that, for a subset of the objects in the TOE, the TSF will ensure that there is no available residual information contained in a resource allocated to those objects or deallocated from those objects.

## Operations

## Selection:

**In FDP\_RIP.1.1, the PP/ST author should specify the event, allocation of the resource to or deallocation of the resource from, that invokes the residual information protection function.**

## Assignment:

**In FDP\_RIP.1.1, the PP/ST author should specify the list of objects subject to residual information protection.**

**FDP\_RIP.2 Full residual information protection**

## User application notes

This component requires that for **all objects** in the TOE, the TSF will ensure that there is no available residual information contained in a resource allocated to those objects or deallocated from those objects.

## Operations

## Selection:

**In FDP\_RIP.2.1, the PP/ST author should specify the event, allocation of the resource to or deallocation of the resource from, that invokes the residual information protection function.**

## F.10 Rollback (FDP\_ROL)

This family addresses the need to return to a well defined valid state, such as the need of a user to undo modifications to a file or to undo transactions in case of an incomplete series of transaction as in the case of databases.

This family is intended to assist a user in returning to a well defined valid state after the user undoes the last set of actions, or, in distributed databases, the return of all of the distributed copies of the databases to the state before an operation failed.

FDP\_RIP and FDP\_ROL conflict when FDP\_RIP enforces that the contents will be made unavailable at the time that a resource is deallocated from an object. Therefore, this use of FDP\_RIP cannot be combined with FDP\_ROL as there would be no information to roll back. FDP\_RIP can be used only with FDP\_ROL when it enforces that the contents will be unavailable at the time that a resource is allocated to an object. This is because the FDP\_ROL mechanism will have an opportunity to access the previous information that may still be present in the TOE in order to successfully roll back the operation.

The rollback requirement is bounded by certain limits. For example a text editor typically only allows you roll back up to a certain number of commands. Another example would be backups. If backup tapes are rotated, after a tape is reused, the information can no longer be retrieved. This also poses a bound on the rollback requirement.

### FDP\_ROL.1 Basic rollback

#### User application notes

This component allows a user or subject to undo a set of operations on a predefined set of objects. The undo is only possible within certain limits, for example up to a number of characters or up to a time limit.

#### Operations

##### Assignment:

**In FDP\_ROL.1.1, the PP/ST author should specify the access control SFP(s) and/or information flow control SFP(s) that will be enforced when performing rollback operations. This is necessary to make sure that roll back is not used to circumvent the specified SFPs.**

**In FDP\_ROL.1.1 the PP/ST author should specify the list of operations that can be rolled back.**

**In FDP\_ROL.1.1 the PP/ST author should specify the list of objects that are subjected to the rollback policy.**

**In FDP\_ROL.1.2 the PP/ST author should specify the boundary limit to which rollback operations may be performed. The boundary may be specified as a predefined period of time, for example, operations may be undone which were**

**performed within the past two minutes. Other possible boundaries may be defined as the maximum number of operations allowable or the size of a buffer.**

## **FDP\_ROL.2 Advanced rollback**

### User application notes

This component enforces that the TSF provide the capability to rollback all operations; however, the user can choose to rollback only a part of them.

### Operations

#### Assignment:

In FDP\_ROL.2.1, the PP/ST author should specify the access control SFP(s) and/or information flow control SFP(s) that will be enforced when performing rollback operations. This is necessary to make sure that roll back is not used to circumvent the specified SFPs.

In FDP\_ROL.2.1 the PP/ST author should specify the list of objects that are subjected to the rollback policy.

In FDP\_ROL.2.2 the PP/ST author should specify the boundary limit to which rollback operations may be performed. The boundary may be specified as a predefined period of time, for example, operations may be undone which were performed within the past two minutes. Other possible boundaries may be defined as the maximum number of operations allowable or the size of a buffer.

## F.11 Stored data integrity (FDP\_SDI)

This family provides requirements that address protection of user data while it is stored within the TSC.

### User notes

Hardware glitches or errors may affect data stored in memory. This family provides requirements to detect these unintentional errors. The integrity of user data while stored on storage devices within the TSC are also addressed by this family.

To prevent a subject from modifying the data, the FDP\_IFF or FDP\_ACF families are required (rather than this family).

This family differs from FDP\_ITT Internal TOE transfer that protects the user data from integrity errors while being transferred within the TOE.

### FDP\_SDI.1 Stored data integrity monitoring

#### User application notes

This component monitors data stored on media for integrity errors. The PP/ST author can specify different kinds of user data attributes that will be used as the basis for monitoring.

#### Operations

##### Assignment:

**In FDP\_SDI.1.1 the PP/ST author should specify the integrity errors that the TSF will detect.**

**In FDP\_SDI.1.1 the PP/ST author should specify the user data attributes that will be used as the basis for the monitoring.**

### FDP\_SDI.2 Stored data integrity monitoring and action

#### User application notes

This component monitors data stored on media for integrity errors. The PP/ST author can specify which action should be taken in case an integrity error is detected.

## Operations

## Assignment:

In FDP\_SDI.2.1 the PP/ST author should specify the integrity errors that the TSF will detect.

In FDP\_SDI.2.1 the PP/ST author should specify the user data attributes that will be used as the basis for the monitoring.

**In FDP\_SDI.2.2 the PP/ST author should specify the actions to be taken in case an integrity error is detected.**

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## F.12 Inter-TSF user data confidentiality transfer protection (FDP\_UCT)

This family defines the requirements for ensuring the confidentiality of user data when it is transferred using an external channel between the TOE and another trusted IT product. Confidentiality is enforced by preventing unauthorised disclosure of user data in transit between the two end points. The end points may be a TSF or a user.

### User notes

This family provides a requirement for the protection of user data during transit. In contrast, FDP\_ITC handles TSF data.

### FDP\_UCT.1 Basic data exchange confidentiality

#### User application notes

The TSF has the ability to protect from disclosure some user data which is exchanged.

#### Operations

##### Assignment:

**In FDP\_UCT.1.1, the PP/ST author should specify the access control SFP(s) and/or information flow control SFP(s) that will be enforced when exchanging user data. The specified policies will be enforced to make decisions about who can exchange data and which data can be exchanged.**

##### Selection:

**In FDP\_UCT.1.1, the PP/ST author should specify whether this element applies to a mechanism that transmits or receives user data.**

## F.13 Inter-TSF user data integrity transfer protection (FDP\_UIT)

This family defines the requirements for providing integrity for user data in transit between the TSF and another trusted IT product and recovering from detectable errors. At a minimum, this family monitors the integrity of user data for modifications. Furthermore, this family supports different ways of correcting detected integrity errors.

### User notes

This family defines the requirements for providing integrity for user data in transit; while FPT\_ITI handles TSF data.

FDP\_UIT and FDP\_UCT are duals of each other, as FDP\_UCT addresses user data confidentiality. Therefore, the same mechanism that implements FDP\_UIT could possibly be used to implement other families such as FDP\_UCT and FDP\_ITC.

### FDP\_UIT.1 Data exchange integrity

#### User application notes

The TSF has a basic ability to send or receive user data in a manner such that modification of the user data can be detected. There is no requirement for a TSF mechanism to attempt to recover from the modification.

#### Operations

##### Assignment:

**In FDP\_UIT.1.1, the PP/ST author should specify the access control SFP(s) and/or information flow control SFP(s) that will be enforced on the transmitted data or on the received data. The specified policies will be enforced to make decisions about who can transmit or who can receive data, and which data can be transmitted or received.**

##### Selection:

**In FDP\_UIT.1.1, the PP/ST author should specify whether this element applies to a TSF that is transmitting or receiving objects.**

**In FDP\_UIT.1.1 the PP/ST author should specify whether the data should be protected from modification, deletion, insertion or replay.**

**In FDP\_UIT.1.2 the PP/ST author should specify whether the errors of the type: modification, deletion, insertion or replay are detected.**

## FDP\_UIT.2 Source data exchange recovery

### User application notes

This component provides the ability to recover from a set of identified transmission errors, if required, with the help of the other trusted IT product. As the other trusted IT product is outside the TSC, the TSF cannot control its behaviour. However, it can provide functions that have the ability to cooperate with the other trusted IT product for the purposes of recovery. For example, the TSF could include functions that depend upon the source trusted IT product to re-send the data in the event that an error is detected. This component deals with the ability of the TSF to handle such an error recovery.

### Operations

#### Assignment:

**In FDP\_UIT.2.1, the PP/ST author should specify the access control SFP(s) and/or information flow control SFP(s) that will be enforced when recovering user data. The specified policies will be enforced to make decisions about which data can be recovered and how it can be recovered.**

**In FDP\_UIT.2.1, the PP/ST author should specify the list of integrity errors from which the TSF, with the help of the source trusted IT product, is able to recover the original user data.**

## FDP\_UIT.3 Destination data exchange recovery

### User application notes

This component provides the ability to recover from a set of identified transmission errors. It accomplishes this task without help from the source trusted IT product. For example, if certain errors are detected, the transmission protocol must be robust enough to allow the TSF to recover from the error based on checksums and other information available within that protocol.

### Operations

#### Assignment:

**In FDP\_UIT.3.1, the PP/ST author should specify the access control SFP(s) and/or information flow control SFP(s) that will be enforced when recovering user data. The specified policies will be enforced to make decisions about which data can be recovered and how it can be recovered.**

**In FDP\_UIT.3.1, the PP/ST author should specify the list of integrity errors from which the receiving TSF, alone, is able to recover the original user data.**

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## Annex G (informative)

### Identification and authentication (FIA)

A common security requirement is to unambiguously identify the person and/or entity performing functions in a TOE. This involves not only establishing the claimed identity of each user, but also verifying that each user is indeed who he/she claims to be. This is achieved by requiring users to provide the TSF with some information that is known by the TSF to be associated with the user in question.

Families in this class address the requirements for functions to establish and verify a claimed user identity. Identification and Authentication is required to ensure that users are associated with the proper security attributes (e.g. identity, groups, roles, security or integrity levels).

The unambiguous identification of authorised users and the correct association of security attributes with users and subjects is critical to the enforcement of the security policies.

The FIA\_UID family addresses determining the identity of a user.

The FIA\_UAU family addresses verifying the identity of a user.

The FIA\_AFL family addresses defining limits on repeated unsuccessful authentication attempts.

The FIA\_ATD family address the definition of user attributes that are used in the enforcement of the TSP.

The FIA\_USB family addresses the correct association of security attributes for each authorised user.

The FIA\_SOS family addresses the generation and verification of secrets that satisfy a defined metric.

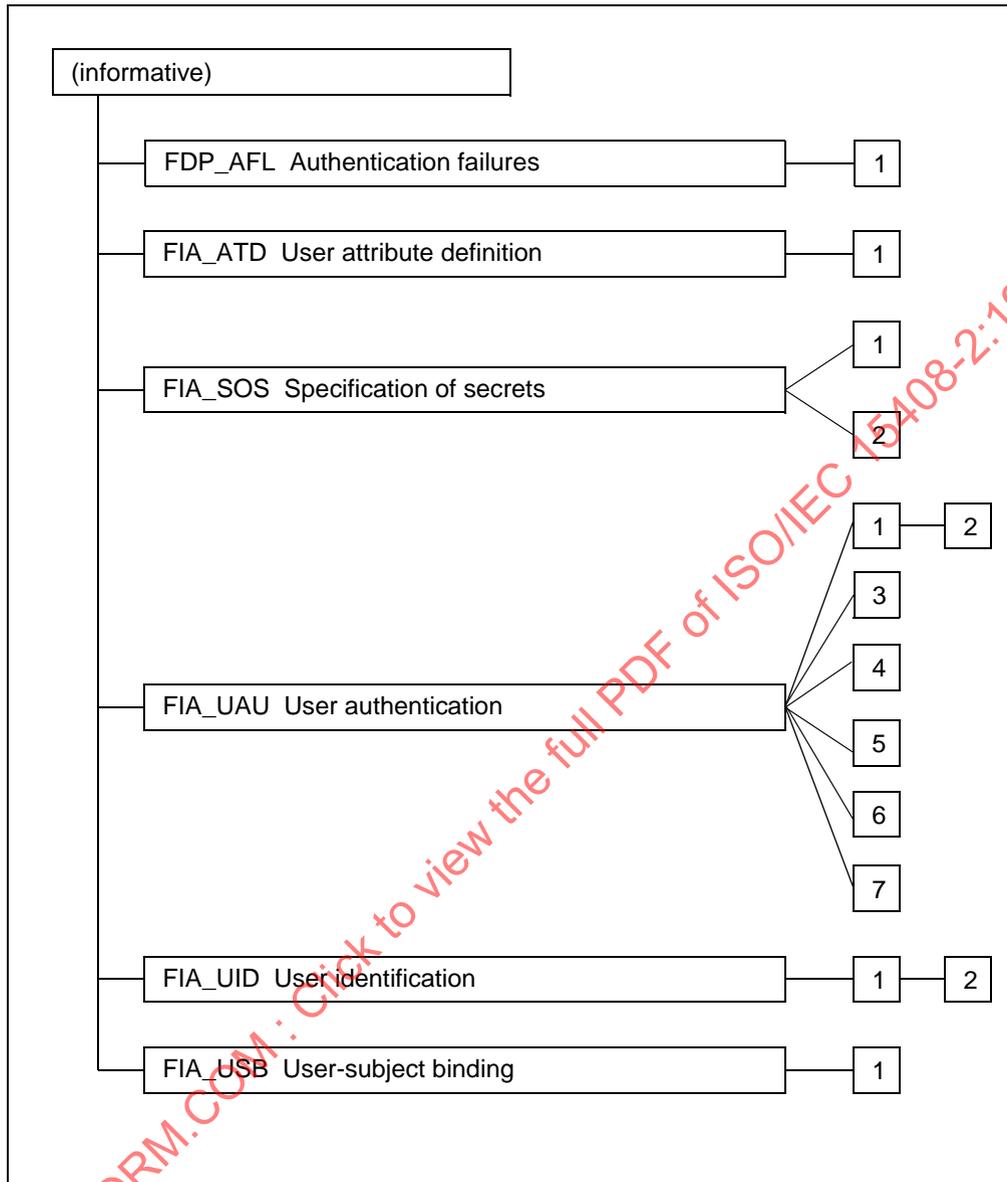


Figure G.1 - Identification and authentication class decomposition

## G.1 Authentication failures (FIA\_AFL)

This family addresses requirements for defining values for authentication attempts and TSF actions in cases of authentication attempt failure. Parameters include, but are not limited to, the number of attempts and time thresholds.

The session establishment process is the interaction with the user to perform the session establishment independent of the actual implementation. If the number of unsuccessful authentication attempts exceeds the indicated threshold, either the user account or the terminal (or both) will be locked. If the user account is disabled, the user cannot log-on to the system. If the terminal is disabled, the terminal (or the address that the terminal has) cannot be used for any log-on. Both of these situations continue until the condition for re-establishment is satisfied.

### FIA\_AFL.1 Authentication failure handling

#### User application notes

The PP/ST author may define the number of unsuccessful authentication attempts or may choose to let the TOE developer or the authorised user to define this number. The unsuccessful authentication attempts need not be consecutive, but rather related to an authentication event. Such an authentication event could be the count from the last successful session establishment at a given terminal.

The PP/ST author could specify a list of actions that the TSF shall take in the case of authentication failure. An authorised administrator could also be allowed to manage the events, if deemed opportune by the PP/ST author. These actions could be, among other things, terminal deactivation, user account deactivation, or administrator alarm. The conditions under which the situation will be restored to normal must be specified on the action.

In order to prevent denial of service, TOEs usually ensure that there is at least one user account that cannot be disabled.

Further actions for the TSF can be stated by the PP/ST author, including rules for re-enabling the user session establishment process, or sending an alarm to the administrator. Examples of these actions are: until a specified time has lapsed, until the authorised administrator re-enables the terminal/account, a time related to failed previous attempts (every time the attempt fails, the disabling time is doubled).

#### Operations

##### Assignment:

**In FIA\_AFL.1.1, if the PP/ST author should specify the default number of unsuccessful authentication attempts that, when met or surpassed, will trigger the events. The PP/ST author may specify that the number is: “an authorised administrator configurable number”.**

**In FIA\_AFL.1.1, the PP/ST author should specify the authentication events. Examples of these authentication events are: the unsuccessful authentication attempts since the last successful authentication for the indicated user identity,**

**the unsuccessful authentication attempts since the last successful authentication for the current terminal, the number of unsuccessful authentication attempts in the last 10 minutes. At least one authentication event must be specified.**

**In FIA\_AFL.1.2, the PP/ST author should specify the actions to be taken in case the threshold is met or surpassed. These actions could be disabling of an account for 5 minutes, disabling the terminal for an increasing amount of time (2 to the power of the number of unsuccessful attempts in seconds), or disabling of the account until unlocked by the administrator and simultaneously informing the administrator. The actions should specify the measures and if applicable the duration of the measure (or the conditions under which the measure will be ended).**

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## G.2 User attribute definition (FIA\_ATD)

All authorised users may have a set of security attributes, other than the user's identity, that are used to enforce the TSP. This family defines the requirements for associating user security attributes with users as needed to support the TSP.

### User notes

There are dependencies on the individual security policy definitions. These individual definitions should contain the listing of attributes that are necessary for policy enforcement.

### FIA\_ATD.1 User attribute definition

#### User application notes

This component specifies the security attributes that should be maintained at the level of the user. This means that the security attributes listed are assigned to and can be changed at the level of the user. In other words, changing a security attribute in this list associated with a user should have no impact on the security attributes of any other user.

In case security attributes belong to a group of users (such as Capability List for a group), the user will need to have a reference (as security attribute) to the relevant group.

#### Operations

##### Assignment:

**In FIA\_ATD.1.1, the PP/ST author should specify the security attributes that are associated to an individual user. An example of such a list is {'clearance', 'group identifier', 'rights'}.**

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

### G.3 Specification of secrets (FIA\_SOS)

This family defines requirements for mechanisms that enforce defined quality metrics on provided secrets, and generate secrets to satisfy the defined metric. Examples of such mechanisms may include automated checking of user supplied passwords, or automated password generation.

A secret can be generated outside the TOE (e.g. selected by the user and introduced in the system). In such cases, the FIA\_SOS.1 component can be used to ensure that the external generated secret adheres to certain standards, for example a minimum size, not present in a dictionary, and/or not previously used.

Secrets can also be generated by the TOE. In those cases, the FIA\_SOS.2 component can be used to require the TOE to ensure that the secrets that will adhere to some specified metrics.

#### User notes

Secrets contain the authentication data provided by the user for an authentication mechanism that is based on knowledge the user possesses. When cryptographic keys are employed, the class FCS should be used instead of this family.

#### FIA\_SOS.1 Verification of secrets

##### User application notes

Secrets can be generated by the user. This component ensures that those user generated secrets can be verified to meet a certain quality metric.

##### Operations

###### Assignment:

**In FIA\_SOS.1.1, the PP/ST author should provide a defined quality metric. The quality metric specification can be as simple as a description of the quality checks to be performed, or as formal as a reference to a government published standard that defines the quality metrics that secrets must meet. Examples of quality metrics could include a description of the alphanumeric structure of acceptable secrets and/or the space size that acceptable secrets must meet.**

#### FIA\_SOS.2 TSF generation of secrets

This component allows the TSF to generate secrets for specific functions such as authentication by means of passwords.

##### User application notes

When a pseudo-random number generator is used in a secret generation algorithm, it should accept as input random data that would provide output that has a high degree of unpredictability. This random data (seed) can be derived from a number of available parameters such as a system clock, system registers, date, time, etc. The parameters should be selected to ensure that the number of

unique seeds that can be generated from these inputs should be at least equal to the minimum number of secrets that must be generated.

## Operations

### Assignment:

**In FIA\_SOS.2.1, the PP/ST author should provide a defined quality metric. The quality metric specification can be as simple as a description of the quality checks to be performed or as formal as a reference to a government published standard that defines the quality metrics that secrets must meet. Examples of quality metrics could include a description of the alphanumeric structure of acceptable secrets and/or the space size that acceptable secrets must meet.**

**In FIA\_SOS.2.2, the PP/ST author should provide a list of TSF functions for which the TSF generated secrets must be used. An example of such a function could include a password based authentication mechanism.**

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## G.4 User authentication (FIA\_UAU)

This family defines the types of user authentication mechanisms supported by the TSF. This family defines the required attributes on which the user authentication mechanisms must be based.

### FIA\_UAU.1 Timing of authentication

#### User application notes

This component requires that the PP/ST author define the TSF-mediated actions that can be performed by the TSF on behalf of the user before the claimed identity of the user is authenticated. The TSF-mediated actions should have no security concerns with users incorrectly identifying themselves prior to being authenticated. For all other TSF-mediated actions not in the list, the user must be authenticated before the action can be performed by the TSF on behalf of the user.

This component cannot control whether the actions can also be performed before the identification took place. This requires the use of either FIA\_UID.1 and FIA\_UID.2 with the appropriate assignments.

#### Operations

##### Assignment:

**In FIA\_UAU.1.1, the PP/ST author should specify a list of TSF-mediated actions that can be performed by the TSF on behalf of a user before the claimed identity of the user is authenticated. This list cannot be empty. If no actions are appropriate, component FIA\_UAU.2 should be used instead. An example of such an action might include the request for help on the login procedure.**

### FIA\_UAU.2 User authentication before any action

#### User application notes

This component requires that users are identified before any TSF-mediated action can take place on behalf of that user.

### FIA\_UAU.3 Unforgeable authentication

#### User application notes

This component addresses requirements for mechanisms that provide protection of authentication data. Authentication data that is copied from another user, or is in some way constructed should be detected and/or rejected. These mechanisms provide confidence that users authenticated by the TSF are actually who they claim to be.

This component may be useful only with authentication mechanisms that are based on authentication data that cannot be shared (e.g. biometrics). It is impossible for a TSF to detect or prevent the sharing of passwords outside the control of the TSF.

## Operations

### Selection:

**In FIA\_UAU.3.1, the PP/ST author should specify whether the TSF will detect, prevent, or detect and prevent forging of authentication data**

**In FIA\_UAU.3.2, the PP/ST author should specify whether the TSF will detect, prevent, or detect and prevent copying of authentication data**

## FIA\_UAU.4 Single-use authentication mechanisms

### User application notes

This component addresses requirements for authentication mechanisms based on single-use authentication data. Single-use authentication data can be something the user has or knows, but not something the user is. Examples of single-use authentication data include single-use passwords, encrypted time-stamps, and/or random numbers from a secret lookup table.

The PP/ST author can specify to which authentication mechanism(s) this requirement applies.

## Operations

### Assignment:

**In FIA\_UAU.4.1, the PP/ST author should specify the list of authentication mechanisms to which this requirement applies. This assignment can be ‘all authentication mechanisms’. An example of this assignment could be “the authentication mechanism employed to authenticate people on the external network”.**

## FIA\_UAU.5 Multiple authentication mechanisms

### User application notes

The use of this component allows specification of requirements for more than one authentication mechanism to be used within a TOE. For each distinct mechanism, applicable requirements must be chosen from the FIA class to be applied to each mechanism. It is possible that the same component could be selected multiple times in order to reflect different requirements for the different use of the authentication mechanism.

The management functions in the class FMT may provide maintenance capabilities for the set of authentication mechanisms, as well as the rules that determine whether the authentication was successful.

To allow anonymous users to be on the system, a ‘none’ authentication mechanism can be incorporated. The use of such access should be clearly explained in the rules of FIA\_UAU.5.2.

## Operations

### Assignment:

**In FIA\_UAU.5.1, the PP/ST author should define the available authentication mechanisms. An example of such a list could be: “none, password mechanism, biometric (retinal scan), S/key mechanism”.**

**In FIA\_UAU.5.2, the PP/ST author should specify the rules that describe how the authentication mechanisms provide authentication and when each is to be used. This means that for each situation the set of mechanisms that might be used for authenticating the user must be described. An example of a list of such rules is: “if the user has special privileges a password mechanism and a biometric mechanism both shall be used, with success only if both succeed; for all other users a password mechanism shall be used.”**

**The PP/ST author might give the boundaries within which the authorised administrator may specify specific rules. An example of a rule is: “the user shall always be authenticated by means of a token; the administrator might specify additional authentication mechanisms that also must be used.” The PP/ST author also might choose not to specify any boundaries but leave the authentication mechanisms and their rules completely up to the authorised administrator.**

## FIA\_UAU.6 Re-authenticating

### User application notes

This component addresses potential needs to re-authenticate users at defined points in time. These may include user requests for the TSF to perform security relevant actions, as well as requests from non-TSF entities for re-authentication (e.g. a server application requesting that the TSF re-authenticate the client it is serving).

## Operations

### Assignment:

**In FIA\_UAU.6.1, the PP/ST author should specify the list of conditions requiring re-authentication. This list could include a specified user inactivity period that has elapsed, the user requesting a change in active security attributes, or the user requesting the TSF to perform some security critical function.**

**The PP/ST author might give the boundaries within which the reauthentication should occur and leave the specifics to the authorised administrator. An example of such a rule is: “the user shall always be re-authenticated at least once a day; the administrator might specify that the re-authentication should happen more often but not more often than once every 10 minutes.”**

## FIA\_UAU.7 Protected authentication feedback

### User application notes

This component addresses the feedback on the authentication process that will be provided to the user. In some systems the feedback consists of indicating how many characters have been typed but not showing the characters themselves, in other systems even this information might not be appropriate.

This component requires that the authentication data is not provided as-is back to the user. In a workstation environment, it could display a 'dummy' (e.g. star) for each password character provided, and not the original character.

### Operations

#### Assignment:

**In FIA\_UAU.7.1, the PP/ST author should specify the feedback related to the authentication process that will be provided to the user. An example of a feedback assignment is “the number of characters typed”, another type of feedback is “the authentication mechanism that failed the authentication”.**

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## G.5 User identification (FIA\_UID)

This family defines the conditions under which users are required to identify themselves before performing any other actions that are to be mediated by the TSF and that require user identification.

### FIA\_UID.1 Timing of identification

User application notes

This component poses requirements for the user to be identified. The PP/ST author can indicate specific actions that can be performed before the identification takes place.

If FIA\_UID.1 is used, the TSF-mediated actions mentioned in FIA\_UID.1 should also appear in this FIA\_UAU.1.

Operations

Assignment:

**In FIA\_UID.1.1, the PP/ST author should specify a list of TSF-mediated actions that can be performed by the TSF on behalf of a user before the user has to identify itself. If no actions are appropriate, component FIA\_UID.2 should be used instead. An example of such an action might include the request for help on the login procedure.**

### FIA\_UID.2 User identification before any action

User application notes

In this component users will be identified. A user is not allowed by the TSF to perform any action before being identified.

## G.6 User-subject binding (FIA\_USB)

An authenticated user, in order to use the TOE, typically activates a subject. The user's security attributes are associated (totally or partially) with this subject. This family defines requirements to create and maintain the association of the user's security attributes to a subject acting on the user's behalf.

### FIA\_USB.1 User-subject binding

#### User application notes

The phrase "acting on behalf of" has proven to be a contentious issue in previous criteria. It is intended that a subject is acting on behalf of the user who caused the subject to come into being or to be activated to perform a certain task. Therefore, when a subject is created, that subject is acting on behalf of the user who initiated the creation. In case anonymity is used, the subject is still acting on behalf of a user, but the identity of the user is unknown. A special category are the subjects that serve multiple users (e.g. a server process). In such cases the user that created this subject is assumed to be the 'owner'.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## Annex H (informative)

### Security management (FMT)

This class specifies the management of several aspects of the TSF: security attributes, TSF data and functions in the TSF. The different management roles and their interaction, such as separation of capability, can also be specified

In an environment where the TOE is made up of multiple physically separated parts that form a distributed system, the timing issues with respect to propagation of security attributes, TSF data, and function modification become very complex, especially if the information is required to be replicated across the parts of the TOE. This should be considered when selecting components such as FMT\_REV.1 Revocation, or FMT\_SAE.1 Time-limited authorisation, where the behaviour might be impaired. In such situations, use of components from FMT\_TRC is advisable.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

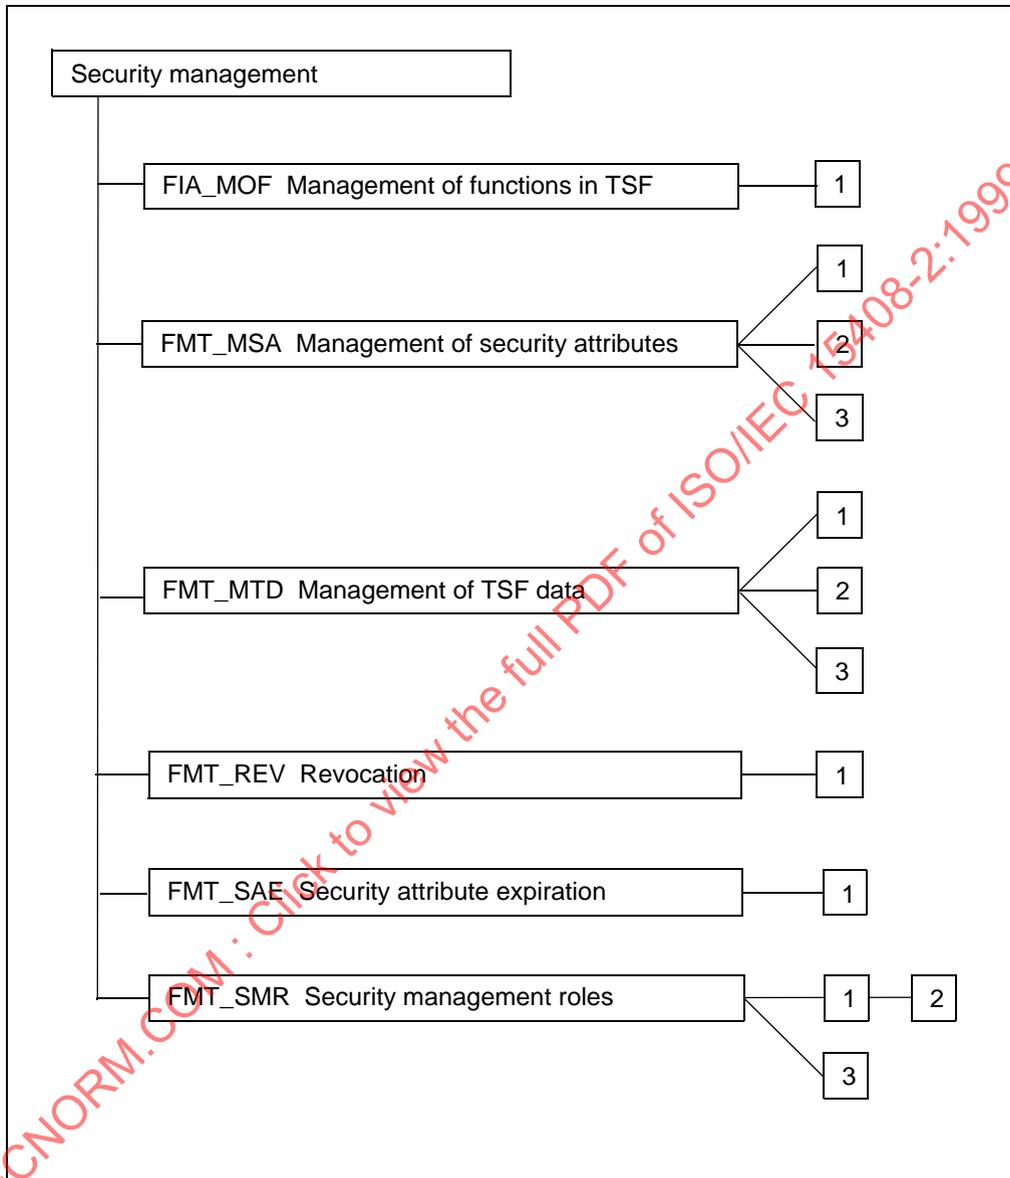


Figure H.1 - Security management class decomposition

## H.1 Management of functions in TSF (FMT\_MOF)

The TSF management functions enable authorised users to set up and control the secure operation of the TOE. These administrative functions typically fall into a number of different categories:

- a) Management functions that relate to access control, accountability and authentication controls enforced by the TOE. For example, definition and update of user security characteristics (e.g. unique identifiers associated with user names, user accounts, system entry parameters) or definition and update of auditing system controls (e.g. selection of audit events, management of audit trails, audit trail analysis, and audit report generation), definition and update of per-user policy attributes (such as user clearance), definition of known system access control labels, and control and management of user groups.
- b) Management functions that relate to controls over availability. For example, definition and update of availability parameters or resource quotas.
- c) Management functions that relate to general installation and configuration. For example, TOE configuration, manual recovery, installation of TOE security fixes (if any), repair and reinstallation of hardware.
- d) Management functions that relate to routine control and maintenance of TOE resources. For example, enabling and disabling peripheral devices, mounting of removable storage media, backup and recovery of user and system objects.

Note that these functions need to be present in a TOE based on the families included in the PP or ST. It is the responsibility of the PP/ST author to ensure that adequate functions will be provided to manage the system in a secure fashion.

The TSF might contain functions that can be controlled by an administrator. For example, the auditing functions could be switched off, the time synchronisation could be switchable, and/or the authentication mechanism could be modifiable.

### FMT\_MOF.1 Management of security functions behaviour

This component allows identified roles to manage the security functions of the TSF. This might entail obtaining the current status of a security function, disabling or enabling the security function, or modifying the behaviour of the security function. An example of modifying the behaviour of the security functions is changing of authentication mechanisms.

#### Operations

Selection:

**In FMT\_MOF.1.1 the PP/ST author should select whether the role can determine the behaviour of, disable, enable, and/or modify the behaviour of the security functions.**

Assignment:

**In FMT\_MOF.1.1 the PP/ST author should specify the functions that can be modified by the identified roles. Examples include auditing and time determination.**

**In FMT\_MOF.1.1 the PP/ST author should specify the roles that are allowed to modify the functions in the TSF. The possible roles are specified in FMT\_SMR.1.**

IECNORM.COM : Click to view the full PDF of ISO/IEC 15408-2:1999

## H.2 Management of security attributes (FMT\_MSA)

This family defines the requirements on the management of security attributes.

Users, subjects and objects have associated security attributes that will affect the behaviour of the TSF. Examples of such security attributes are the groups to which a user belongs, the roles he/she might assume, the priority of a process (subject), and the rights belonging to a role or a user. These security attributes might need to be managed by the user, a subject or a specific authorised user (a user with explicitly given rights for this management).

It is noted that the right to assign rights to users is itself a security attribute and/or potentially subject to management by FMT\_MSA.1.

FMT\_MSA.2 can be used to ensure that any accepted combination of security attributes is within a secure state. The definition of what “secure” means is left to the TOE guidance and the TSP model. If the developer provided a clear definition of the secure values and the reason why they should be considered secure, the dependency from FMT\_MSA.2 to ADV\_SPM.1 can be argued away.

In some instances subjects, objects or user accounts are created. If no explicit values for the related security attributes are given, default values need to be used. FMT\_MSA.1 can be used to specify that these default values can be managed.

### FMT\_MSA.1 Management of security attributes

This component allows users acting in certain roles to manage identified security attributes. The users are assigned to a role within the component FMT\_SMR.1.

The default value of a parameter is the value the parameter takes when it is instantiated without specifically assigned values. An initial value is provided during the instantiation (creation) of a parameter, and overrides the default value.

#### Operations

##### Assignment:

**In FMT\_MSA.1.1, the PP/ST author should list the access control SFP or the information flow control SFP for which the security attributes are applicable.**

##### Selection:

**In FMT\_MSA.1.1 the PP/ST author should specify the operations that can be applied to the identified security attributes. The PP/ST author can specify that the role can modify the default value (change\_default), query, modify the security attribute, delete the security attributes entirely or define their own operation.**