



INTERNATIONAL STANDARD ISO/IEC 9594-9:1998
TECHNICAL CORRIGENDUM 2

Published 2002-08-15

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION
INTERNATIONAL ELECTROTECHNICAL COMMISSION • МЕЖДУНАРОДНАЯ ЭЛЕКТРОТЕХНИЧЕСКАЯ КОМИССИЯ • COMMISSION ÉLECTROTECHNIQUE INTERNATIONALE

Information technology — Open Systems Interconnection — The Directory: Replication

TECHNICAL CORRIGENDUM 2

Technologies de l'information — Interconnexion de systèmes ouverts (OSI) — L'annuaire: Duplication

RECTIFICATIF TECHNIQUE 2

Technical Corrigendum 2 to ISO/IEC 9594-9:1998 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 6, *Telecommunications and information exchange between systems*.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 9594-9:1998/Cor 2:2002

INTERNATIONAL STANDARD
ITU-T RECOMMENDATION

Information technology – Open Systems Interconnection – The Directory:
Replication

TECHNICAL CORRIGENDUM 2

NOTE – This Technical Corrigendum covers the result of the ballot resolutions of Draft Technical Corrigenda 2, 3, and 4.

1) Defect reports covered by Draft Technical Corrigendum 2

(Covering resolutions to defect report 187, 208 and 243)

1.1) This corrects the defects reported in defect report 9594/187

*In 7.2.1.1, add **root** to the list of SDSE types.*

*In 11.3.1.1, delete **root** from the list of SDSE types.*

1.2) This corrects the defects reported in defect report 9594/208

Insert the following text into 7.2.2.3, at the end of both the second paragraph and the first sentence of the third paragraph (after "appropriate knowledge"):


and access control information.

Insert a new third paragraph into 7.2.2.3 as follows:

If subordinate knowledge is supplied, and the supplying DSE (of type **subr**) is also of type **admPoint**, then the SDSE shall additionally be of type **admPoint** and the **administrativeRole** attribute shall be supplied. If such a DSE has any immediately subordinate subentries containing **PrescriptiveACI** relating to the administrative point, then they shall also be supplied as SDSEs in the shadowed information.

NOTE – A DSE can be of type **subr** and **admPoint** in a superior DSA, when the naming context in the subordinate DSA is the start of a new administrative area.

Update Figure 3 as follows to show a subentry immediately below a subordinate reference. The subentry contains prescriptiveACI and is part of the shadowed information.

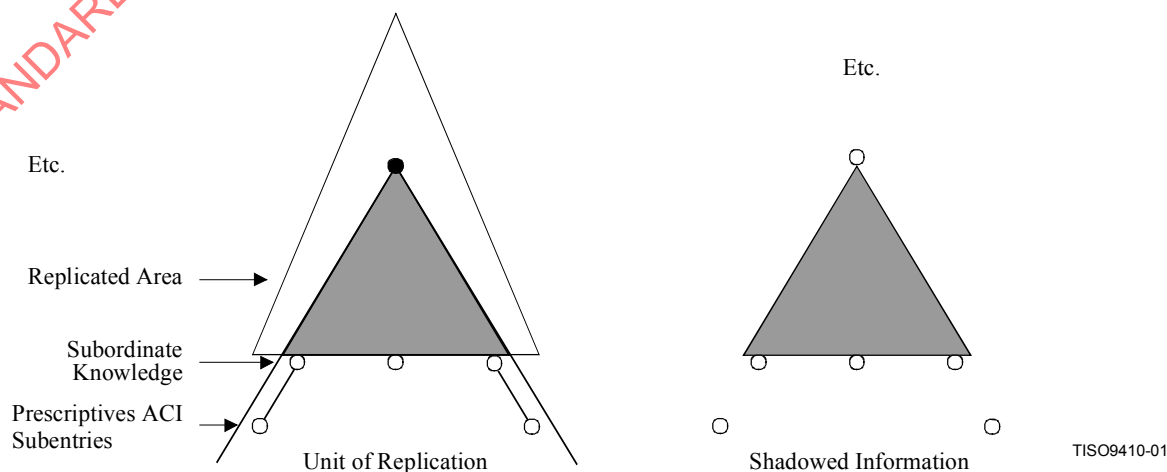

Add supporting text to 7.2 in the paragraph after Figure 3. Insert the following sentences after the sentence "Subordinate knowledge may also be replicated":

Implicit in the subordinate knowledge is the access control information which governs access to the RDN of the subordinate knowledge. When the subordinate entry is an administrative point in another DSA, then part of this access control information may be held in **prescriptiveACI** subentries beneath the subordinate knowledge.

Add the following new point d) to 9.2.4.1:

- d) if subordinate knowledge (not extended knowledge) is shadowed then any **prescriptiveACI** in subordinate subentries shall also be copied.

1.3) This corrects the defects reported in defect report 9594/243

In 2.1, change all references ISO/IEC 9594-x:1997 to ISO/IEC 9594-x:1998.

In clause 6, change ITU-T Rec. X.518 | ISO/IEC 9594-5 to ITU-T Rec. X.519 | ISO/IEC 9594-5.

In 9.2 in the **UnitOfReplication** type, change **ContextType** to **CONTEXT.&id**.

In 11.1:

Change **CoordinateShadowUpdate** to **coordinateShadowUpdate**.

Remove the last right curly parenthesis in the **CoordinateShadowUpdateArgument**.

Replace the ASN.1 in Annex A with:

DirectoryShadowAbstractService

{joint-iso-itu-t ds(5) module(1) directoryShadowAbstractService(15) 3}

DEFINITIONS IMPLICIT TAGS ::=

BEGIN

-- **EXPORTS ALL** --

-- The types and values defined in this module are exported for use in the other ASN.1 modules contained
-- within the Directory Specifications, and for the use of other applications which will use them to access
-- directory services. Other applications may use them for their own purposes, but this will not constrain
-- extensions and modifications needed to maintain or improve the directory service.

IMPORTS

-- from ITU-T Rec. X.501 | ISO/IEC 9594-2

directoryAbstractService, **directoryOperationalBindingTypes**, **informationFramework**,
disp, **distributedOperations**, **dsaOperationalAttributeTypes**, **enhancedSecurity**,
opBindingManagement

FROM **UsefulDefinitions** {joint-iso-itu-t ds(5) module(1) **usefulDefinitions**(0) 3}

Attribute, **AttributeType**, **CONTEXT**, **DistinguishedName**, **RelativeDistinguishedName**,
SubtreeSpecification

FROM **InformationFramework** **informationFramework**

OPERATIONAL-BINDING, **OperationalBindingID**

FROM **OperationalBindingManagement** **opBindingManagement**

DSETType, **SupplierAndConsumers**

FROM **DSAOperationalAttributeTypes** **dsaOperationalAttributeTypes**

OPTIONALLY-PROTECTED, **OPTIONALLY-PROTECTED-SEQ**

FROM **EnhancedSecurity** **enhancedSecurity**

-- from ITU-T Rec. X.511 | ISO/IEC 9594-3

CommonResultsSeq, **ContextSelection**, **directoryBind**, **directoryUnbind**, **EntryModification**,
SecurityParameters

FROM **DirectoryAbstractService** **directoryAbstractService**

-- from ITU-T Rec. X.518 | ISO/IEC 9594-4

AccessPoint

FROM DistributedOperations distributedOperations

-- from ITU-T Rec. X.519 | ISO/IEC 9594-5

id-op-binding-shadow

FROM DirectoryOperationalBindingTypes directoryOperationalBindingTypes

id-errcode-shadowError, id-opcode-coordinateShadowUpdate, id-opcode-requestShadowUpdate,
id-opcode-updateShadow, reliableShadowSupplierInitiatedAC,
reliableShadowConsumerInitiatedAC,
shadowConsumerInitiatedAC, shadowSupplierInitiatedAC
FROM DirectoryInformationShadowProtocol disp

-- from ITU-T Rec. X.880 | ISO/IEC 13712-1

ERROR, OPERATION

FROM Remote-Operations-Information-Objects

{joint-iso-itu-t remote-operations(4) informationObjects(5) version1(0)} ;

-- bind and unbind operations --

dSAShadowBind OPERATION ::= directoryBind

dSAShadowUnbind OPERATION ::= directoryUnbind

-- shadow operational binding --

shadowOperationalBinding OPERATIONAL-BINDING ::= {
AGREEMENT ShadowingAgreementInfo
APPLICATION CONTEXTS {
 { shadowSupplierInitiatedAC
 APPLIES TO { All-operations-supplier-initiated } } |
 { shadowConsumerInitiatedAC
 APPLIES TO { All-operations-consumer-initiated } } |
 { reliableShadowSupplierInitiatedAC
 APPLIES TO { All-operations-supplier-initiated } } |
 { reliableShadowConsumerInitiatedAC
 APPLIES TO { All-operations-consumer-initiated } } }
ASYMMETRIC
 ROLE-A { -- shadow supplier role
 ESTABLISHMENT-INITIATOR TRUE
 ESTABLISHMENT-PARAMETER NULL
 MODIFICATION-INITIATOR TRUE
 TERMINATION-INITIATOR TRUE }
 ROLE-B { -- shadow consumer role
 ESTABLISHMENT-INITIATOR TRUE
 ESTABLISHMENT-PARAMETER NULL
 MODIFICATION-INITIATOR TRUE
 MODIFICATION-PARAMETER ModificationParameter
 TERMINATION-INITIATOR TRUE }
ID id-op-binding-shadow }

-- types --

ModificationParameter ::= SEQUENCE {
 secondaryShadows SET OF SupplierAndConsumers }

AgreementID ::= OperationalBindingID

ShadowingAgreementInfo ::= SEQUENCE {
 shadowSubject UnitOfReplication,
 updateMode UpdateMode DEFAULT supplierInitiated : onChange : TRUE,
 master AccessPoint OPTIONAL,
 secondaryShadows [2] BOOLEAN DEFAULT FALSE }

UnitOfReplication
 area
 attributes
 knowledge
 subordinates
 contextSelection
 supplyContexts
 allContexts
 selectedContexts

::= SEQUENCE {
 AreaSpecification,
 AttributeSelection,
 Knowledge OPTIONAL,
 BOOLEAN DEFAULT FALSE,
 ContextSelection OPTIONAL,
 [0] CHOICE {
 NULL,
 SET SIZE (1..MAX) OF CONTEXT.&id } OPTIONAL }

AreaSpecification
 contextPrefix
 replicationArea

::= SEQUENCE {
 DistinguishedName,
 SubtreeSpecification }

Knowledge
 knowledgeType
 extendedKnowledge

::= SEQUENCE {
 ENUMERATED {
 master (0),
 shadow (1),
 both (2) },
 BOOLEAN DEFAULT FALSE }

AttributeSelection

::= SET OF ClassAttributeSelection

ClassAttributeSelection
 class
 classAttributes

::= SEQUENCE {
 OBJECT IDENTIFIER OPTIONAL,
 ClassAttributes DEFAULT allAttributes : NULL }

ClassAttributes
 allAttributes
 include
 exclude

::= CHOICE {
 NULL,
 [0] AttributeTypes,
 [1] AttributeTypes }

AttributeTypes

::= SET OF AttributeType

UpdateMode
 supplierInitiated
 consumerInitiated

::= CHOICE {
 [0] SupplierUpdateMode,
 [1] ConsumerUpdateMode }

SupplierUpdateMode
 onChange
 scheduled

::= CHOICE {
 BOOLEAN,
 SchedulingParameters }

ConsumerUpdateMode

::= SchedulingParameters

SchedulingParameters
 periodic
 othertimes

::= SEQUENCE {
 PeriodicStrategy OPTIONAL, -- must be present if othertimes is set to FALSE --
 BOOLEAN DEFAULT FALSE }

PeriodicStrategy
 beginTime
 windowSize
 updateInterval

::= SEQUENCE {
 Time OPTIONAL,
 INTEGER,
 INTEGER }

Time ::= GeneralizedTime
 -- as per 41.3 b) and c) of ITU-T Rec. X.680 | ISO/IEC 8824-1

-- shadow operations, arguments, and results --

All-operations-consumer-initiated OPERATION ::= {
 requestShadowUpdate | updateShadow }

All-operations-supplier-initiated OPERATION ::= {
 coordinateShadowUpdate | updateShadow }

coordinateShadowUpdate OPERATION ::= {
 ARGUMENT CoordinateShadowUpdateArgument
 RESULT CoordinateShadowUpdateResult
 ERRORS { shadowError }
 CODE id-opcode-coordinateShadowUpdate }

CoordinateShadowUpdateArgument ::= OPTIONALLY-PROTECTED { [0] SEQUENCE {
 agreementID AgreementID,
 lastUpdate Time OPTIONAL,
 updateStrategy CHOICE {
 standard ENUMERATED {
 noChanges (0),
 incremental (1),
 total (2) },
 other EXTERNAL },
 securityParameters SecurityParameters OPTIONAL } }

CoordinateShadowUpdateResult ::= CHOICE {
 null NULL,
 information OPTIONALLY-PROTECTED { [0] SEQUENCE {
 greementID AgreementID,
 lastUpdate Time OPTIONAL,
 COMPONENTS OF CommonResultsSeq } } }

requestShadowUpdate OPERATION ::= {
 ARGUMENT RequestShadowUpdateArgument
 RESULT RequestShadowUpdateResult
 ERRORS { shadowError }
 CODE id-opcode-requestShadowUpdate }

RequestShadowUpdateArgument ::= OPTIONALLY-PROTECTED { [0] SEQUENCE {
 agreementID AgreementID,
 lastUpdate Time OPTIONAL,
 requestedStrategy CHOICE {
 standard ENUMERATED {
 incremental (1),
 total (2) },
 other EXTERNAL },
 securityParameters SecurityParameters OPTIONAL } }

RequestShadowUpdateResult ::= CHOICE {
 null NULL,
 information OPTIONALLY-PROTECTED { [0] SEQUENCE {
 agreementID AgreementID,
 lastUpdate Time OPTIONAL,
 COMPONENTS OF CommonResultsSeq } } }

updateShadow OPERATION ::= {
 ARGUMENT UpdateShadowArgument
 RESULT UpdateShadowResult
 ERRORS { shadowError }
 CODE id-opcode-updateShadow }

UpdateShadowArgument ::= OPTIONALLY-PROTECTED { [0] SEQUENCE {
 agreementID AgreementID,
 updateTime Time,
 updateWindow UpdateWindow OPTIONAL,
 updatedInfo RefreshInformation,
 securityParameters SecurityParameters OPTIONAL } }

UpdateShadowResult ::= CHOICE {
 null NULL,
 information OPTIONALLY-PROTECTED { [0] SEQUENCE {
 agreementID AgreementID,
 lastUpdate Time OPTIONAL,
 COMPONENTS OF CommonResultsSeq } } }

UpdateWindow ::= SEQUENCE {
 start Time,
 stop Time }

RefreshInformation ::= CHOICE {
 noRefresh NULL,
 total [0] TotalRefresh,
 incremental [1] IncrementalRefresh,
 otherStrategy EXTERNAL }