



AEROSPACE MATERIAL

Society of Automotive Engineers, Inc. SPECIFICATION

TWO PENNSYLVANIA PLAZA, NEW YORK, N.Y. 10001

AMS 7455C

Superseding AMS 7455B

Issued 9-15-57

Revised 11-1-70

BOLTS AND SCREWS, STEEL, LOW ALLOY HEAT RESISTANT Hardened and Tempered, Roll Threaded

1. **ACKNOWLEDGMENT:** A vendor shall mention this specification number and its revision letter in all quotations and when acknowledging purchase orders.
2. **APPLICATION:** Bolts and screws made primarily from AMS 6304 steel for use up to 900 F (482 C).
3. **MATERIAL:** Shall be AMS 6304 steel having hardenability of J50=20 min when austenitized at 1725 F \pm 10 (940.6 C \pm 5.6), unless otherwise specified.
4. **FABRICATION:**
 - 4.1 **Blanks:** Heads shall be formed by hot forging or cold forging; machined heads will not be permitted.
 - 4.2 **Heat Treatment:** Headed blanks shall, before finishing the shank and the bearing surface of the head, \emptyset cold working the head-to-shank fillet radius, and rolling the threads, be heat treated as follows:
 - 4.2.1 **Heating Equipment:** Furnaces may be any type ensuring uniform temperature throughout the parts being heated and shall be equipped with, and operated by, automatic temperature controllers. The heating medium or atmosphere shall cause neither surface hardening nor decarburization other than that permitted by 5.2.2 and 5.2.3.
 - 4.2.2 **Hardening:** Blanks of AMS 6304 shall be uniformly heated to 1750 F \pm 25 (898.9 C \pm 14), held at \emptyset heat for 1 - 1.5 hr, and quenched in oil or water. For other steels, the temperature shall be as agreed upon by purchaser and vendor.
 - 4.2.3 **Tempering:** Hardened blanks shall be tempered by heating uniformly to the temperature necessary to produce the specified hardness and microstructure but not lower than 1000 F (538 C), holding at heat for 6 hr, and cooling in air.
 - 4.3 **Oxide and Decarburization Removal:** The heat treated blanks, before cold working the fillet radius and rolling the threads, shall have all surfaces free from surface oxide, oxide penetration, and decarburization except as permitted in 5.2.3 caused by prior heat treatment. The removal process shall produce no intergranular attack or corrosion of the blanks. The metal removed from the bearing surface of the head and the full body diameter of the shank shall be as little as practicable to obtain a clean, smooth surface and in no case shall be so great as to produce more cutting of flow lines in the head-to-shank junction than shown in Fig. 1B. \emptyset
 - 4.4 **Cold Working of Fillet Radius:** After removal of oxide and decarburization as in 4.3, the head-to-shank fillet radius of parts having the radius complete throughout the circumference of the part shall be cold worked sufficiently to remove all visual evidence of grinding or tool marks. Distortion due to cold working shall not raise metal more than 0.002 in. above the contour at "A" or depress metal more than 0.002 in. below the contour at "B" as shown in Fig. 2; distorted areas shall not extend beyond "C" as shown in Fig. 2. In configurations having an undercut associated with the fillet radius, the cold working will be required only for 90 deg of fillet arc, starting at the point of tangency of the fillet radius and the bearing surface of the head. \emptyset
 - 4.5 **Thread Rolling:** Threads shall be formed on the heat treated and finished blanks by a single rolling process after removal of oxide as in 4.3. \emptyset

SAE Technical Board rules provide that: "All technical reports, including standards approved by the Board, are advisory only. Their use by anyone engaged in industry or trade is entirely voluntary. There is no agreement to adhere to any SAE standard or recommended practice, and no commitment to conform to or be guided by any technical report. In formulating and approving technical reports, the Board and its Committees will not investigate or consider patents which may apply to the subject matter. Prospective users of the report are responsible for protecting themselves against liability for infringement of patents."

5. **TECHNICAL REQUIREMENTS:** Parts shall conform to the metallurgical and mechanical requirements specified below, determined in accordance with MIL-STD-1312 except as otherwise specified herein; when \emptyset ASTM methods are specified for determining conformance, tests shall be conducted in accordance with the issue of the ASTM method listed in the latest issue of AMS 2350. Parts shall also conform to the latest issue of the following:

AS 1177 - Nondestructive Inspection Standards for Bolts and Screws
AS 3062 - Bolts, Screws, and Studs, Screw Thread Requirements
AS 3063 - Bolts, Screws, and Studs, Straightness, Concentricity, and Squareness Requirements

- 5.1 **Macroscopic Examination:** Parts or sections of parts, as applicable, shall be etched in a solution of approximately 50% hydrochloric acid (sp gr 1.19) and 50% water for sufficient time to reveal flow lines \emptyset but not longer than 15 min. and shall then be examined at approximately 20X magnification to determine conformance to the following requirements, except that examination for the thread imperfections of 5.1.3 may be made by microscopic examination of specimens polished and etched as in 5.2.

5.1.1 **Flow Lines:**

- 5.1.1.1 Examination of a longitudinal section through the part shall show flow lines in the shank, head-to-shank fillet, and bearing surface which follow the contour of the part as shown in Fig. 1A, except \emptyset that slight cutting of flow lines by the oxide and decarburization removal process of 4.3 is permissible, as shown in Fig. 1B; excessive cutting of flow lines in the shank, head-to-shank fillet, and bearing surface, as shown in Fig. 1C, is not permissible except when an undercut is associated with the fillet radius. The head style shown in Figs. 1A through 1C is for illustrative purposes only but other symmetrical head styles shall conform to the above requirements. Flow lines in heads on parts having special heads, such as Dee- or Tee-shaped heads or thinner-than-standard heads, shall be as agreed upon by purchaser and vendor.

- 5.1.1.2 Flow lines in threads shall be continuous, shall follow the general thread contour, and shall be of maximum density at root of thread (See Fig. 3).

- 5.1.2 **Internal Defects:** Examination of longitudinal sections of the head and shank and of the threads shall reveal no cracks, laps, or porosity. The head and shank section shall extend not less than $D/2$ in. \emptyset from the bearing surface of the head and the threaded section shall extend not less than $D/2$ in. beyond the thread runout where "D" is the nominal diameter of the shank after heading. If the two sections would overlap, the entire length of the part shall be sectioned and examined as a whole.

5.1.3 **Threads:**

- 5.1.3.1 Root defects such as notches, slivers, folds, roughness, and oxide scale are not permissible (See Fig. 4).

- 5.1.3.2 Multiple laps on the flanks of threads are not permissible regardless of location. Single laps on the flanks of threads that extend toward the root are not permissible (See Figs. 5 and 6).

- 5.1.3.3 There shall be no laps along the flank of the thread below the pitch diameter (See Fig. 7). A single lap is permissible along the flank of the thread above the pitch diameter on either the pressure or non-pressure flank (one lap at any cross section through the thread) provided it extends toward the crest and generally parallel to the flank (See Fig. 7).

- 5.1.3.4 Crest craters, crest laps, or a crest lap in combination with a crest crater are permissible, provided the imperfections do not extend deeper than 20% of the basic thread height (See Table I) as measured from the thread crest when the thread major diameter is at minimum size (See Fig. 8). The major diameter of the thread shall be measured prior to sectioning. As the major diameter of the thread approaches maximum size, values for depth of crest crater and crest lap imperfections listed in Table I may be increased by 1/2 of the difference between the minimum major diameter and the actual major diameter as measured on the part.

5.2 Microscopic Examination: Specimens cut from parts shall be polished, etched in 2% Nital, and then examined at not lower than 100X magnification to determine conformance to the following requirements:

∅ 5.2.1 Microstructure: Parts shall have microstructure of tempered martensite.

5.2.2 Surface Hardening: Parts shall have no surface hardening except as produced during cold working of the head-to-shank fillet radius and during rolling of threads. Evidence of carburization, recarburization, or nitriding will not be permitted. In case of dispute over results of the microscopic examination, microhardness testing shall be used as a referee method; a Vickers hardness reading within 0.003 in. of the surface more than 30 points higher than the reading in the core will be evidence of nonconformance to this requirement.

5.2.3 Decarburization:

5.2.3.1 The bearing surface of the head, the head-to-shank fillet radius, the shank, and the threads shall be free from decarburization.

5.2.3.2 Depth of decarburization on those surfaces of the head which are the original surfaces of the bar shall be not greater than that permitted by the applicable material specification.

5.2.3.3 Depth of decarburization on the OD of the head of cylindrical head parts is not restricted.

5.2.3.4 Depth of decarburization at any point on any surface not covered by 5.2.3.1, 5.2.3.2, or 5.2.3.3 shall not exceed 0.002 inch.

5.3 Properties: Parts shall conform to the requirements of 5.3.1.1 or 5.3.1.2, as applicable, and to the requirements of 5.3.2. Threaded members of gripping fixtures for tensile tests shall be of sufficient size and strength to develop the full strength of the part without stripping the thread. For tensile tests on finished parts, the parts shall be aligned in fixtures so that three full turns of thread are exposed in the gage section.

5.3.1 Tensile Properties:

5.3.1.1 Finished Parts: Parts having hardness as in 5.3.2 shall have breaking load not lower than that specified in Table II. Parts requiring minimum hardness other than that specified in 5.3.2 shall have breaking load not lower than the product of the load specified in Table II and the factor listed in Table II applicable to the hardness range specified on the drawing. If the size or shape of the part is such that failure would occur outside the threaded section but the part can be tested satisfactorily, such as parts having a shank diameter equal to or less than the thread minor diameter or having an undercut, parts shall conform to only the tensile strength requirement of 5.3.1.2; for such parts, the diameter on which stress is based shall be the actual measured minimum diameter of the part and parts shall fracture only in the unthreaded shank section or the undercut, not in the area of the head-to-shank fillet radius except when this radius is associated with an undercut.


5.3.1.2 Machined Test Specimens: If the size or shape of the part is such that a tensile test cannot be made on the part, tensile tests shall be conducted in accordance with ASTM A370 on specimens machined from finished parts or from coupons of the same heat of material heat treated with the parts. Specimens shall conform to the following requirements for the applicable hardness:

Minimum Hardness of Specified Range Rockwell C	Tensile Strength psi, min	Elongation % in 2 in. or 4D min	Reduction of Area %, min
30	140,000	15	50
36	165,000	12	47
42	195,000	10	30


5.3.1.2.1 When permitted by purchaser, hardness tests on the end of parts may be substituted for tensile tests of machined specimens.

- 5.3.2 Hardness: Unless otherwise specified, hardness shall be uniform and within the range Rockwell
∅ C 42 - 46 or equivalent but hardness of the threaded section and of the head-to-shank fillet area may be higher as a result of the cold working operations.
- 5.4 Resampling and Retesting: If any part or specimen used in the above tests fails to meet the specified requirements, acceptance of the parts may be based on the testing of three additional parts or specimens for each original nonconforming part or specimen, all of which additional parts or specimens shall conform to specified requirements. Failure of any retest part or specimen to meet the specified requirements shall be cause for rejection of the parts represented and no additional testing shall be permitted. Results of all tests shall be reported.
6. QUALITY: Parts shall be uniform in quality and condition, clean, sound, smooth, and free from burrs and foreign materials and from internal and external imperfections detrimental to their performance.
- ∅ 7. SAMPLING: Shall be in accordance with the latest issue of AMS 2373.
8. REPORTS: Unless otherwise specified, the vendor of parts shall furnish with each shipment three copies of a report stating that the chemical composition of the parts conforms to the requirements of the applicable material specification and showing the results of tests to determine conformance to the tensile property and hardness requirements of this specification. This report shall include the purchase order number, AMS 7455C, contractor or other direct supplier of material, part number, and quantity.
9. REJECTIONS: Parts not conforming to this specification or to authorized modifications will be subject to rejection.

SAENORM.COM : Click to view the full PDF of AMS 7455C

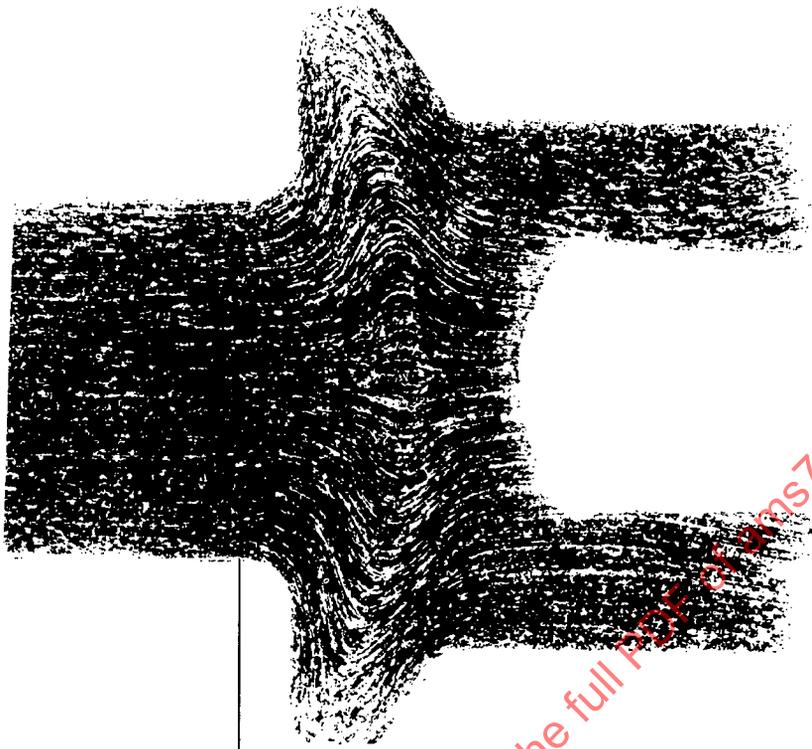


SATISFACTORY GRAIN FLOW
FIGURE 1A

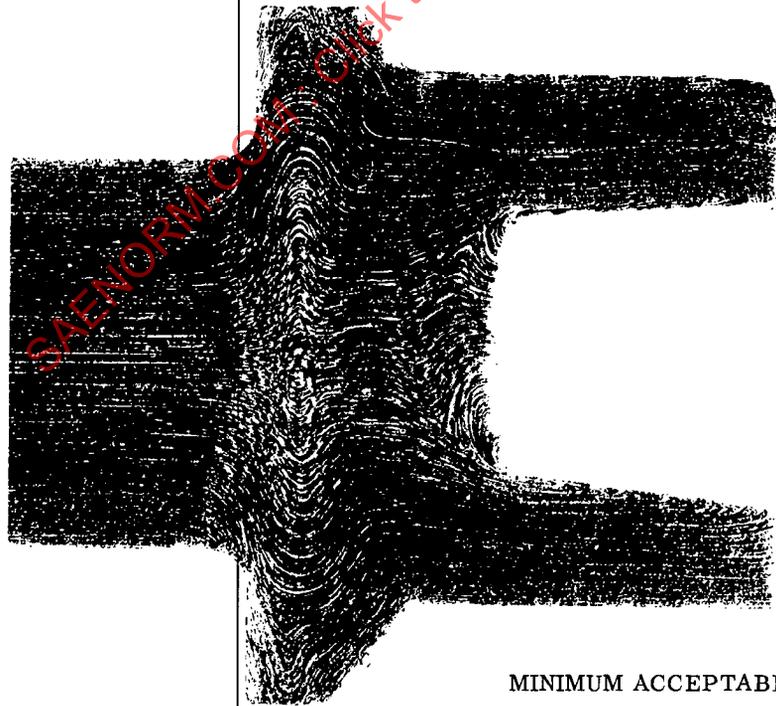

MINIMUM ACCEPTABLE STANDARD

Showing maximum permissible cutting of flow lines after machining to remove oxide and decarburization as in 4.3.


FIGURE 1B

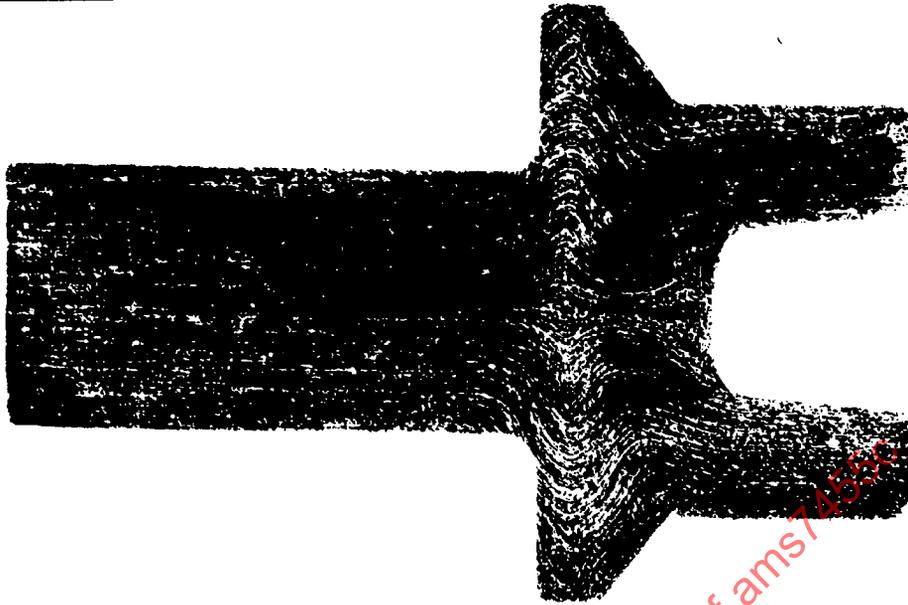

UNACCEPTABLE GRAIN FLOW

Excessive cutting of flow lines in the shank, head to shank fillet, and bearing surface is not permissible.

FIGURE 1C

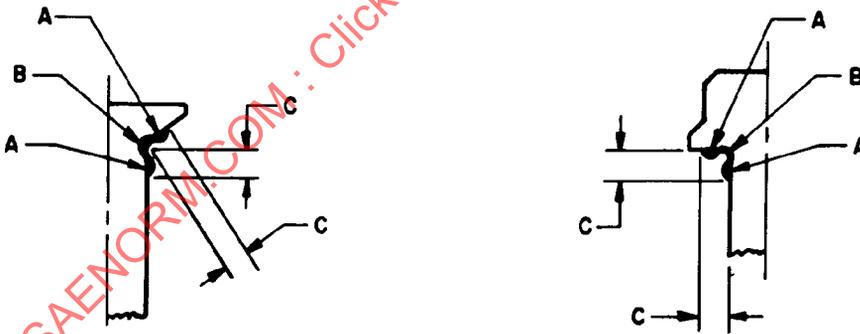


Nominal Bolt Diameter	C, max
Up to 0.3125, excl	0.062
0.3125 and 0.375	0.094
0.4375 - 0.625, incl	0.125
0.750 - 1.000, incl	0.156
Over 1.000	0.188


PERMISSIBLE DISTORTION FROM FILLET WORKING
FIGURE 2




FLOW LINES, ROLLED THREAD
FIGURE 3

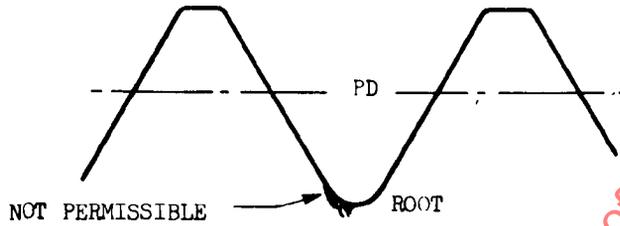

ROLLED THREAD
FIGURE 4

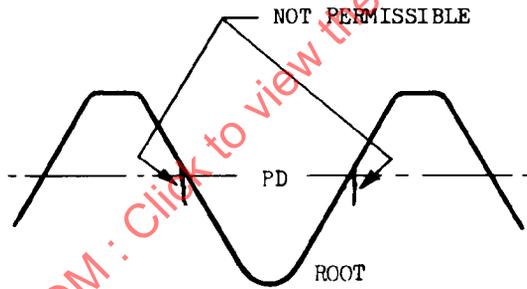


ROLLED THREAD
FIGURE 5

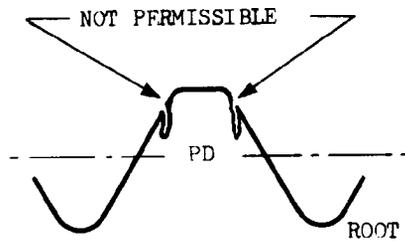


ROLLED THREAD
FIGURE 6

SAENORM.COM : Click to view the full PDF of ams7455c

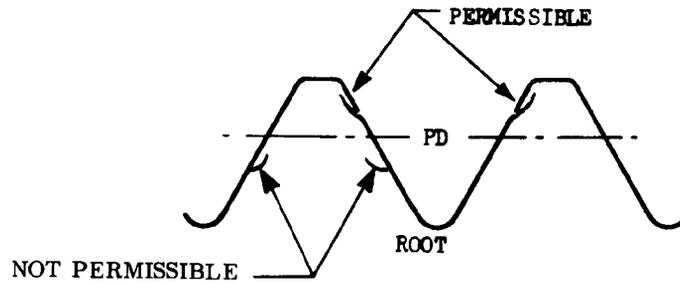

ROLLED THREAD
FIGURE 7

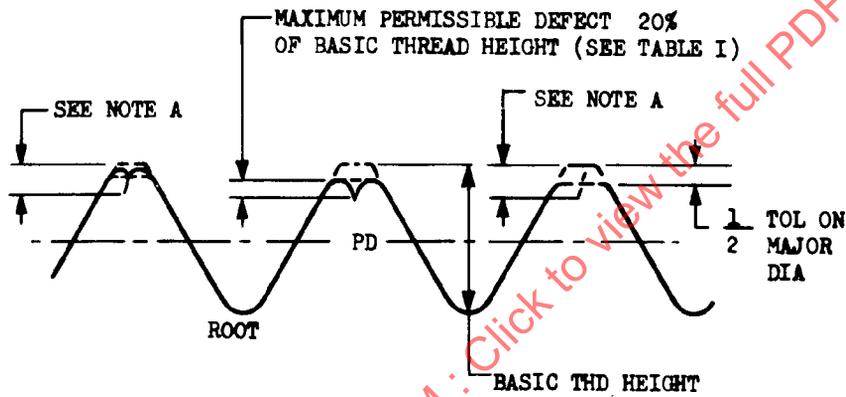

NOTE A. DEPTH OF DEFECT EQUALS 20% OF BASIC THREAD HEIGHT PLUS 1/2 THE DIFFERENCE OF THE ACTUAL MAJOR DIAMETER AND MINIMUM MAJOR DIAMETER.

ROLLED THREAD
FIGURE 8

SAENORM.COM : Click to view the full PDF of ams7455c